



شركة روائع التشييد للصناعة
Rawae AlTashied For Industry Co.



Rawae AlTashied
For Industry Co.
(RTCO)

Profile

CEO

PERSONAL COMMITMENT FOR OUR CLIENTS

Rawae Al-Tashied Company for Industry (RTCO) journey started in 2008, and we are proud to be one of the leading ready mixed concrete, concrete hollow blocks and construction aggregates suppliers for our clients in Saudi Arabia.

We have developed a reputation for excellent quality and exceptional service for our clients. RTCO management team has my full support to deliver effective and innovative solutions for our clients. We have a wealth of experience and expertise in the industry with a highly skilled technical team offering quality assurance & control, and competitive price. Our client's satisfaction is our biggest aim and we are committed to this objective. Our Company Policy and obligation is to satisfy client's needs and requirements. We firmly believe that we are qualified to be your preferred Business Partner and would like to demonstrate our capabilities by serving your needs and offering total customer care and value.



FAHAD MUHAMMAD AL MOQABALA
Chief Executive Officer, CEO



Overview

Rawae Al-Tashied Company (RTCO).

for Industry is a leading company in the field of production of ready-mix concrete and cement products established in 2008 AD; The Company's products are manufactured using the best raw materials and supported by a highly skilled team with global experiences that comply with local and international standards. It holds the ISO 9001:2015 certificate and the certificate of product conformity to the specifications of the Saudi Standards and Metrology Organization (SASO). Our Commitment is to work in accordance with quality systems in various areas of production.

نظرة عامة

شركة روائع التشييد للصناعة؛ شركة رائدة في مجال إنتاج الخرسانة الجاهزة والمنتجات الاسمنتية تأسست في عام ٢٠٠٨ م؛ يتم تصنيع منتجات الشركة باستخدام أفضل المواد الخام ويدعمنا فريق من ذوي المهارات العالية وخبرات عالمية تتوافق مع المعايير المحلية والدولية حاصلة على شهادة الايزو ٩٠٠١:٢٠١٥ وشهادة مطابقة المنتجات لموصفات الهيئة السعودية للمواصفات والمقاييس (SASO)؛ ملتزمين بالعمل وفقا لأنظمة الجودة في مجالات الإنتاج المتنوعة.

Our vision

The company looks forward to build a working relationships and strategic partnership with our customers and to be their preferred supplier in the ready-mix concrete industry to ensure achieving sustainable business partnerships; Our vision is the first objective of the customer through the use of the right standards in order to lead the market; Expanding our share in the Saudi market to achieve the largest return on investment; We are working to develop the Rawae Al Tashied for industry with a shining distinct personality and provide a package of the strongest quality products and services in a professional, innovative, Reliable and customized way.

رؤيتنا

تتطلع الشركة إلى بناء علاقات عمل وشراكة إستراتيجية مع عملاءنا وأن نكون المورد المفضل لديهم في صناعة الخرسانة الجاهزة لضمان تحقيق شراكات تجارية مستدامة؛ رؤيتنا هدفها الأول هو العميل من خلال استخدام المعايير الصحيحة من أجل ريادة السوق؛ وتوسيع حصتنا بالسوق السعودي لتحقيق أكبر عائد استثماري؛ نعمل على أن تكون شركة روائع التشييد للصناعة ذات شخصية متألفة ومتميزة وتقديم قيمة مضافة عبر باقة من أقوى المنتجات والخدمات عالية الجودة بطريقة متاحة؛ مبتكرة؛ موثوقة ومصممة حسب طلب العميل .

Our Goals:

Rawae Al-Tashied Company (RTCO) for Industry has accompanied the Kingdom's progress in the National Transformation Program 2030, with a confident developmental pace, and developed its internal program in comprehensive modernization and strategic expansion, and outlined its future goals to keep pace with the Kingdom's vision 2030, by providing high-quality products and valuable services to contribute effectively. Providing reliable, sustainable, friendly environment, durable with high quality of concrete to conscious customers as well as cost effective customized solutions. Designing our products and developing our resources in a smart way to obtain the highest quality and valuable services Partnership for mutual sustainable growth between businesses. Pioneering technological and environmental innovation.

أهدافنا:

واكبت شركة روائع التشييد للصناعة بخطى تطويرية وثقة مسيرة المملكة في برنامج التحول الوطني ٢٠٣٠، ومن ثم وضعت برنامجها الداخلي في التحديث الشامل والتوسع الاستراتيجي، ورسمت أهدافها المستقبلية لمواكبة رؤية المملكة ٢٠٣٠، وذلك بتقديم منتجات عالية الجودة وخدمات قيمة للمساهمة الفعالة.

وتقديم حلول خرسانية موثوقة ودائمة عالية الجودة وصديقة للبيئة للعملاء المهتمين بالجودة بالإضافة الى حلول مخصصة فعالة للتكلفة.

تصميم منتجاتنا وتطوير مواردنا بطريقة ذكية للحصول على أعلى جودة وخدمات قيمة.

إقامة شراكة من أجل النمو المستدام المتبادل بين الشركات؛ الريادة في الابتكار التكنولوجي والبيئي.





Our Message :

We strive to offer our customers the lowest possible prices, the best choice of selection and the utmost in comfort Commitment to providing high-quality products that conform to the approved specifications and standards, which contributes to the development of the production of ready-mix concrete and cement products;

Continuous improvement of our equipment and systems while maintaining the protection of the surrounding environment and the safety of workers and contributing to the development of society in accordance with the approved regulations. We believe in a customer centric environment by providing consistent quality of our products, reliability and efficient turnkey solutions. Our efficient customer service and technical support added value in which we are committed to succeeding in this mission for the prosperity of our shareholders, employees and society by developing strategic relationships with our suppliers and partners.

رسالتنا :

نحن نسعى جاهدين لتقديم أقل الأسعار الممكنة للعملاء، وأفضل اختيار متاح مع الالتزام بتقديم منتجات عالية الجودة مطابقة للمواصفات والمقاييس المعتمدة بما يساهم في تطوير إنتاج الخرسانة الجاهزة والمنتجات الاسمنتية؛

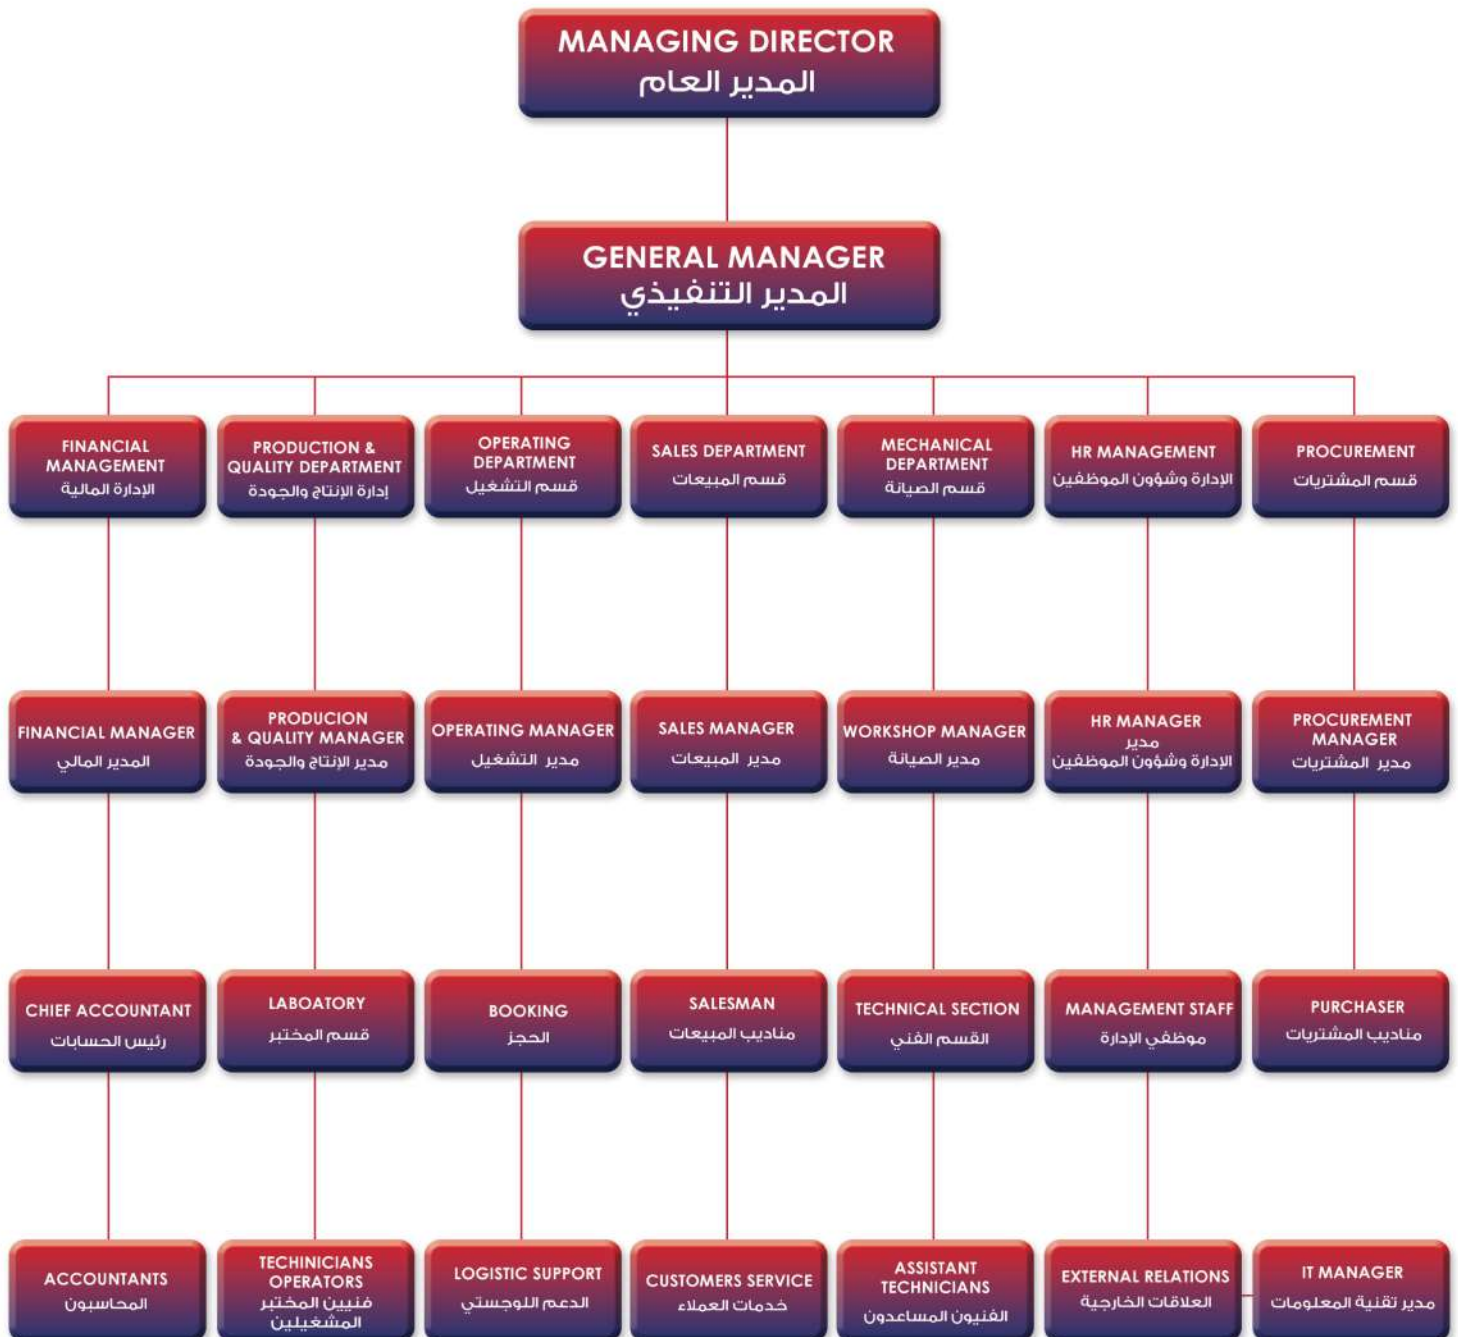
التحسين المستمر لمعداتنا وانظمتنا مع المحافظة على حماية البيئة المحيطة وسلامة العاملين والمساهمة بتنمية المجتمع وفق اللوائح والأنظمة المعتمدة .

نحن نؤمن بالبيئة التي تركز على العملاء من خلال توفير جودة متسقة وموثوقية وحلول جاهزة فعالة. ستكون خدمة العملاء والدعم الفني الفعال لدينا قيمة مضافة؛ نحن ملتزمون بالنجاح بهذه المهمة من أجل ازدهار مساهميننا وموظفينا ومجتمعنا من خلال تطوير علاقات استراتيجية مع مورديننا وشركائنا .



الهيكل التنظيمي

ORGANIZATION STRUCTURE



Our products and services:

1. Ready Mix Concrete

We have 5 central wet process mixing plants & one dry mix plant with fully automated operations with latest control system software. Each batching plant has 4m³ capacities. All plants are in perfect working condition. All Plants with a production capacity 550 m³ per hour of wet concrete.

We guarantee to all our customers and their projects with delivery of high quality of all type of ready-made concrete, by using the high quality of raw materials along latest models of concrete mixers with mechanisms under the management and supervision of a group of the best professional team working in the field. Our Company obtained the following certificates;

1- ISO 9001:2015

2- SASO (For Ready Mix Concrete)



منتجاتنا وخدماتنا:

١. الخرسانة الجاهزة

لدينا ٥ محطات خلط خرسانة مركزية متمركزة بفروعنا مزودة بأحدث برامج التحكم بطاقة إنتاجية ٥٥٠ م^٣ في الساعة؛ كما نؤمن لجميع عملائنا ومشاريعهم الخرسانة الجاهزة عالية الجودة، باستخدام أجود المواد الأولية وأحدث الخلاطات والآليات تحت إدارة وإشراف مجموعة من أفضل الكوادر العاملة في المجال مما أهل شركتنا للحصول على شهادات:

١- الايزو 9001:2015

٢- شهادة مطابقة المنتجات لمواصفات الهيئة السعودية للمواصفات والمقاييس SASO



Material Storage:

Coarse and fine aggregates for production of concrete are stored separately under shaded area. Sprinkler system is installed at aggregates stocks to maintain cooling of aggregates which helps to reduce the temperature of concrete in summer days. Aggregates are being feeding separately in bins. Storage and handling of Admixtures are properly maintained, and tanks are under canopies to avoid direct sunlight. We have good water chillers which compliance client's project requirements. Additional ice is provided in hot weather to keep concrete temperature within required specification.



تخزين المواد:

يتم تخزين مواد إنتاج الخرسانة الجاهزة بمستودعات مظلة بالكامل لكل نوع على حدة لتجنب أشعة الشمس المباشرة ؛ مع أنظمة تبريد مياه عالية الجودة مما يساعد في تخفيض درجات حرارة المواد.

Concrete Recycling Plant:

Since from our establishment, we have been keen to provide good solutions to preserve the environment. Therefore, we have established a recycling and washing station for ready-mix concrete, which has effectively contributed to reducing the depletion of primary resources and raw materials and creating high-value outputs for concrete waste.



محطة إعادة تدوير الخرسانة الجاهزة

حرصنا منذ التأسيس على تقديم حلول جيدة للمحافظة على البيئة ولذلك قمنا بعمل محطة تدوير وغسيل للخرسانة الجاهزة مما ساهم بشكل فعلى في تقليل إستنزاف الموارد الأولية والخامات وخلق مخرجات ذات قيمة عالية لمخلفات الخرسانة.



2. Concrete Masonry Units (CMU)

Our company is a leading company specialized in keeping pace with the best developments in the manufacture of Concrete Hollow & Volcanic Blocks in all sizes and the required sizes in the labor market using the best raw materials and the latest equipment and characterized by its large production capacity, which can meet all the needs of its customers and its products are characterized by achieving the highest quality standards using the latest mechanisms under the professional management and supervision under a group of the best teams working in the field which compliance with the following certificates:

1- ISO = 9001:2015

SASO = Certificate of conformity of products to the specifications of the Saudi Standards and Metrology Organization.

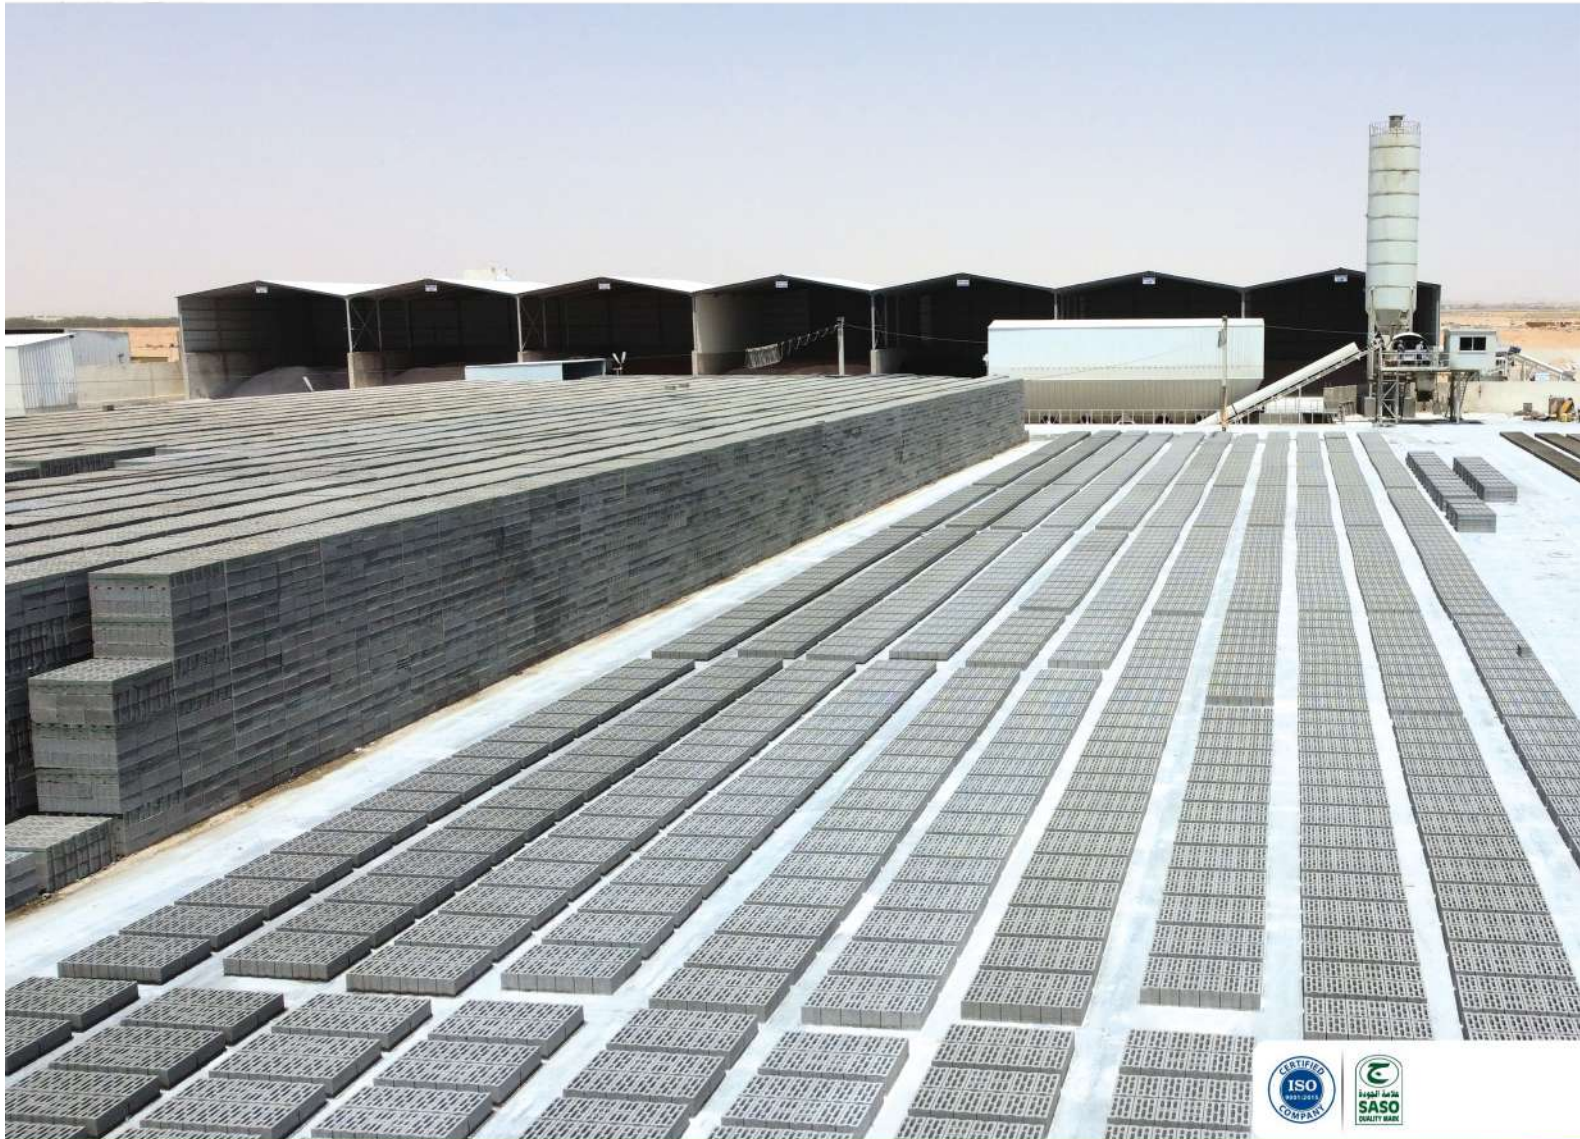


٢- وحدات البناء

تعتبر شركتنا شركة رائدة ومتخصصة في مواكبة أفضل تطورات صناعة وحدات البناء الاسمنتي والبركاني بجميع المقاسات والاحجام المطلوبة في سوق العمل باستخدام أفضل المواد الأولية وأحدث المعدات وتتميز بطاقتها الإنتاجية الكبيرة ما يمكنها تلبية جميع احتياجات عملائها وتتميز منتجاتها بتحقيق أعلى معايير الجودة وذلك باستخدام أحدث الآليات وتحت إدارة وإشراف مجموعة أفضل الكوادر العاملة في المجال مما اهل الشركة للحصول على شهادات:

١- الايزو ISO 9001:2015

٢- شهادة مطابقة المنتجات لمواصفات الهيئة السعودية للمواصفات والمقاييس SASO



3. Mining and Quarries (Construction Agregate)

Due to the rapid growth in the volume of the company's business and the increasing demand for quarry materials for the manufacture of ready-made concrete and construction of building materials, the company has opened the company's branch for mining and quarries using the latest equipment and the best trained technical crews to produce high-quality materials in the required sizes and quality in order to meet the needs of our company production and the needs of other companies.



٣- التعدين والمحاجر

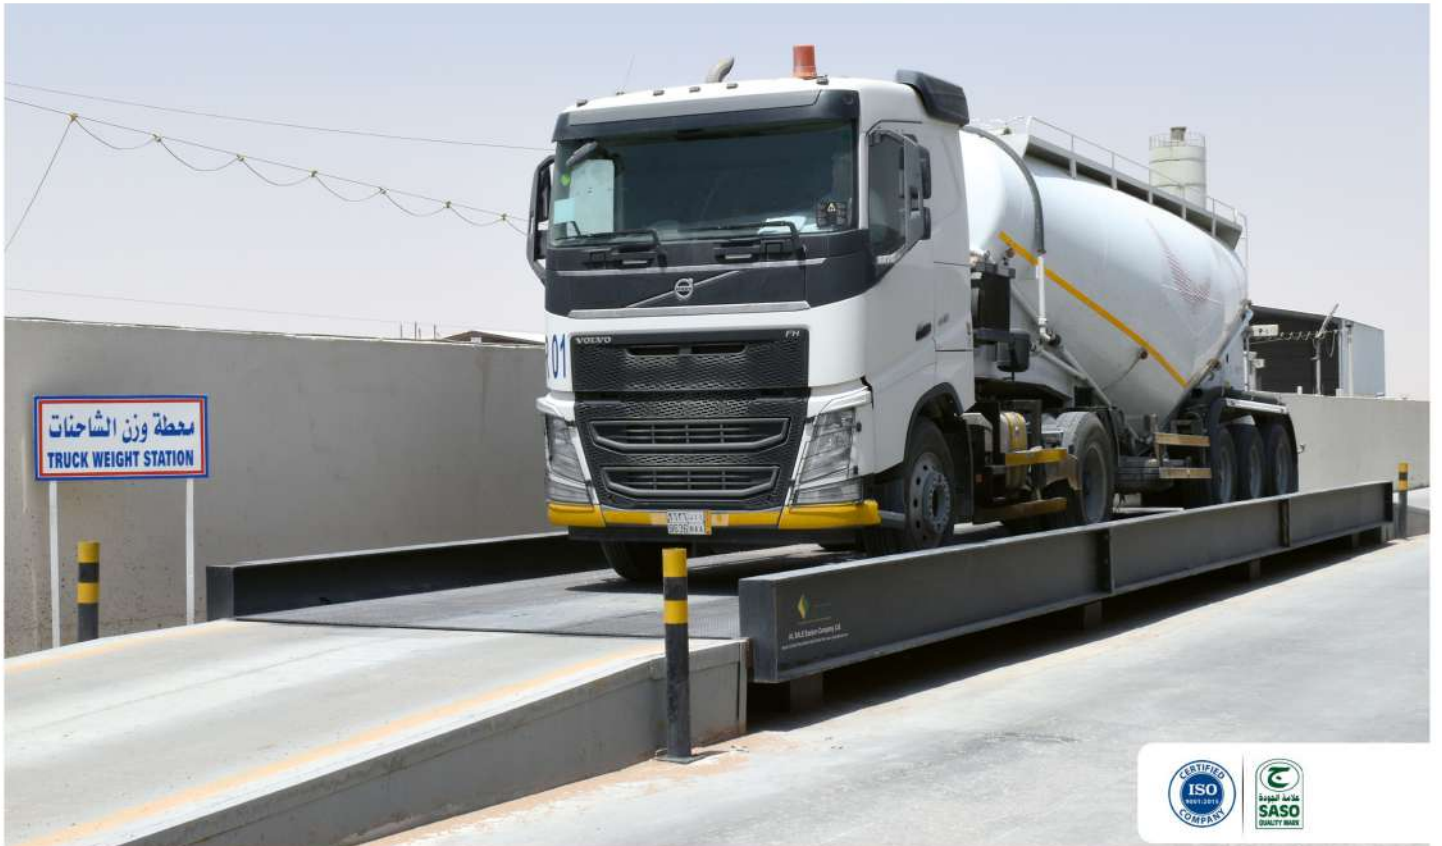
نظرا للنمو المتسارع في حجم اعمال الشركة وتزايد الطلب على المواد المحجرية الخاصة بصناعة الخرسانة الجاهزة ووحدات البناء قامت الشركة بافتتاح فرع الشركة للتعدين والمحاجر باستخدام أحدث المعدات وأفضل الكوادر الفنية المدربة لانتاج المواد عالية الجودة بالمقاسات والجودة المطلوبة وذلك لتلبية احتياجات شركتنا و احتياجات الشركات الأخرى .

4. Company Transportation

We have more than 30 trucks to transport raw materials from supply sites to our warehouses and warehouses of our customers.

٤. النقل البري

يوجد لدينا أكثر من ٣٠ شاحنة لنقل المواد الخام من مواقع التوريد الى مستودعاتنا او مستودعات عملائنا .



Health & Safety

Our Health & Safety system is based on the protection of our employees and our work sites from the risks that the worker may be exposed to in the facility or in the workplace, through the following procedures:

- 1- Providing safe environments for work, by providing all precautions and general safety measures for workers.
- 2- Preserving the safety of workers and their lives, and secure them from the potential dangers that may occur as a result of any shortage or negligence in achieving the conditions of public safety.
- 3- Ensure the safety of equipment, machinery, and property of the facility Implementation of the conditions of the quality management system stipulated in the text of the relevant law on labor and workers' rights.



الامن والسلامة

ترتكز منظومة الأمن والسلامة لدينا لحماية منسوبينا ومواقع عملنا من مجموعة المخاطر التي قد يتعرض لها العامل في المنشأة او في مواقع العمل وذلك بالإجراءات التالية :

- ١- توفير بيئات أمنة للعمل، من خلال توفير كافة الاحتياطات، ووسائل السلامة العامة للعاملين .
- ٢- الحفاظ على سلامة العاملين، وأرواحهم، وتجنبيهم الأخطار المحتملة التي قد تقع نتيجة وجود أي نقص، أو إهمال في تحقيق شروط السلامة العامة.
- ٣- الحرص على سلامة المعدات، والآلات، والممتلكات الخاصة بالمنشأة .
- ٤- تنفيذ شروط نظام إدارة الجودة المنصوص عليها في نص القانون المختص بحقوق العمل، والعمال .



Quality and Production

Fully documented quality assurance along quality control processes and productions form an integral part of our certified quality management system to fulfill the requirements of ISO 9001:2015 & SASO the Saudi Standards, Metrology and Quality Organization.

Rawae Al-Tashied Company for Industry has its own perfectly equipped testing laboratory, which have inspections and testing programs that includes calibration of all equipment, tests frequencies for sources raw material, Concrete & Block routine QC tests in line with compliance with internationally standards.

Rawae Al-Tashied Company for Industry has regularly utilizes the services of independent testing agencies to provide a comparative assessment of the company's testing accuracy. Test results of own laboratory and results from independent testing agencies are made available to customers upon request. We are proud of our reputation for having a great professional collaboration in terms of laboratory services to our honorable clients and their feedback on our delivered services in term of trust & Quality.



الجودة والإنتاج

تشكل عمليات وإجراءات ضمان ومراقبة الجودة الموثقة بالكامل جزءاً لا يتجزأ من نظام إدارة الجودة المعتمد لدينا بما يحقق متطلبات SASO الآيزو ٩٠٠١:٢٠١٥؛ والهيئة السعودية للمواصفات والمقاييس والجودة .

. تمتلك شركة روائع التشييد للصناعة معامل اختبار خاصة بها ومجهزة بشكل مثالي، لبرنامج الفحص والاختبار الكامل داخل الشركة وتشمل معايرة معدات الاختبار والقياس والتأهيل واختبار مصادر المواد الخام؛ مع توفر الموظفين لإجراء الاختبارات الروتينية بما يتماشى مع برنامج اختبار المعايير المعتمدة دولياً .

تستعين شركة روائع التشييد للصناعة بخدمات وكالات الاختبار المستقلة بشكل منتظم لتقديم تقييم مقارن لدقة الاختبار الخاص بالشركة. ويتم توفير نتائج الاختبارات ونتائج وكالات الاختبار المستقلة للعملاء عند الطلب .

نحن فخورون بسمعتنا في التعاون المهني الكبير فيما يتعلق بالخدمات المخبرية لعملائنا الكرام وتعليقاتهم على خدماتنا المقدمة من حيث الثقة والجودة .





Vehicles and Equipment المركبات والمعدات

Serial No. 1	محطات خلط مركزية للخرسانة Concrete Central Mix Plants	Quantity 7
Serial No. 2	محطات خلط مركزية للبلوك Block Plant	Quantity 3
Serial No. 3	مضخات خرسانية Concrete Pumps	Quantity 20
Serial No. 4	شاحنات الخلط Concrete Mixers	Quantity 75
Serial No. 5	رافعات (أوناش) Block Wenchs	Quantity 13
Serial No. 6	بلاكر الاسمنت Cement Bulkers	Quantity 10
Serial No. 7	شايول Shawls	Quantity 10
Serial No. 8	الحفارات Excavators	Quantity 16
Serial No. 9	وايت ماء Water Tankers	Quantity 6
Serial No. 10	شاحنات ثقيلة Heavy Trucks	Quantity 45
Serial No. 11	فوركلفت Forklift	Quantity 8
Serial No. 12	مكائن إنتاج البلك Block Machine	Quantity 12
Serial No. 13	دببر Small Dumper	Quantity 10
Serial No. 14	المبردات Chillers	Quantity 4
Serial No. 15	مصنع الثلج Ice Plant	Quantity 4

SASO License Of Quality Mark for Block Factory Unit



المواصفات السعودية
Saudi Standards



الهيئة السعودية للمواصفات والمقاييس والجودة
Saudi Standards, Metrology and Quality Org.

شهادة ترخيص باستعمال علامة الجودة License For Use of The Quality Mark

رقم الترخيص: 20250717941 License Number:

SASO certifies that it has granted the right to use (SASO) quality mark on the following products, after fulfilling the required requirements according to the related normative references:

تشهد الهيئة السعودية للمواصفات والمقاييس والجودة بأنها رخصت باستخدام علامة الجودة على المنتجات الموضحة أدناه بعد استيفائها للمتطلبات اللازمة وفق المراجع القياسية الخاصة بها:

The Establishment:	شركة روائع التشييد للصناعة شركة شخص واحد	المنشأة:
The Establishment's Address:	الخرج - جدة	عنوان المنشأة:
Production Line Location:	الخرج - جدة	موقع خط الإنتاج:
Normative References:	SASO-ASTM-C94M / 2024	المراجع القياسية:
The Trade Mark:	RTCO	العلامة التجارية:
The Product:	خرسانة جاهزة الخلط	المنتج: (لتفاصيل المنتج في المندقة)
Date of Granting:	2025/05/15	تاريخ المنح:
Date of Renwal:	-	تاريخ التجديد:
Date of Expiry:	2028/05/15	تاريخ الانتهاء:

محير عام الإدارة العامة لمنح الشهادات
Director General of Certification Department

المهندس / خالد بن محمد النملة
Eng. Khalid M. Alnamlah



للتأكد من صحة هذه الشهادة يرجى زيارة موقعنا على الإنترنت، وأي كسب أو تغيير في هذه الشهادة يلغىها.

ISO Certificates



Certificate of Registration

RAWAEE AL TASHIED FOR INDUSTRY COMPANY (RTCO)

BUILDING NO.7122, AR RIYADH DIST. JEDDAH, P.O.BOX: 23875, KSA

has been assessed and Certified by Otabu Certification Pvt. Ltd.
as meeting the requirements of:

ISO 9001:2015 Quality Management System

For the following scope of activities:

READY-MIX CONCRETE, BLOCKS & CONSTRUCTION AGGREGATES

Date of Initial Registration: 25 April 2026

Date of this Certificate: 25 April 2026

Certificate Expiry: 24 April 2029

(subject to the company maintaining its system to the
required standard)



1st Surveillance Due: 24 April 2027

2nd Surveillance Due: 24 April 2028

Issue & Revision No: 01 & NA

Certificate No:- 0425Q575226

To Verify this Certificate please visit at www.otabucert.com




Dr. Anita Gupta
(Managing Director)

*Validity of the certificate is subject to successful completion of surveillance audit on or before due date (in case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal). *This Certificate of Registration remains the Property of Otabu Certification Pvt. Ltd. and shall be returned immediately upon request.

ISO Certificates



Certificate of Registration

RAWAEE AL TASHIED FOR INDUSTRY COMPANY (RTCO)

BUILDING NO.7122, AR RIYADH DIST. JEDDAH, P.O.BOX: 23875, KSA

has been assessed and Certified by Otabu Certification Pvt. Ltd.
as meeting the requirements of:

ISO 14001:2015 Environmental Management System

For the following scope of activities:

READY-MIX CONCRETE, BLOCKS & CONSTRUCTION AGGREGATES

Date of Initial Registration: 25 April 2026

Date of this Certificate: 25 April 2026

Certificate Expiry: 24 April 2029

(subject to the company maintaining its system to the
required standard)



1st Surveillance Due: 24 April 2027

2nd Surveillance Due: 24 April 2028

Issue & Revision No: 01 & NA

Certificate No:- 0425E575326

To Verify this Certificate please visit at www.otabucert.com




Dr. Anita Gupta
(Managing Director)

*Validity of the certificate is subject to successful completion of surveillance audit on or before due date (in case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal). *This Certificate of Registration remains the Property of Otabu Certification Pvt. Ltd. and shall be returned immediately upon request.

ISO Certificates



ISO Certificates



Certificate of Registration

RAWAEE AL TASHIED FOR INDUSTRY COMPANY (RTCO)

16 BUILDING NO. 3048, P.O.BOX: 16455, AL KHARJ KSA

has been assessed and Certified by Otabu Certification Pvt. Ltd.
as meeting the requirements of:

ISO 9001:2015 Quality Management System

For the following scope of activities:

READY-MIX CONCRETE, BLOCKS & CONSTRUCTION AGGREGATES.

Date of Initial Registration: 25 April 2026

Date of this Certificate: 25 April 2026

Certificate Expiry: 24 April 2029

(subject to the company maintaining its system to the
required standard)



1st Surveillance Due: 24 April 2027

2nd Surveillance Due: 24 April 2028

Issue & Revision No: 01 & NA

Certificate No:- 0425Q574926

To Verify this Certificate please visit at www.otabucert.com




Dr. Anita Gupta
(Managing Director)

*Validity of the certificate is subject to successful completion of surveillance audit on or before due date (in case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal). *This Certificate of Registration remains the Property of Otabu Certification Pvt. Ltd. and shall be returned immediately upon request.

ISO Certificates



Certificate of Registration

RAWAEE AL TASHIED FOR INDUSTRY COMPANY (RTCO)

16 BUILDING NO. 3048, P.O.BOX: 16455, AL KHARJ KSA

has been assessed and Certified by Otabu Certification Pvt. Ltd.
as meeting the requirements of:

ISO 14001:2015 Environmental Management System

For the following scope of activities:

READY-MIX CONCRETE, BLOCKS & CONSTRUCTION AGGREGATES.

Date of Initial Registration: 25 April 2026

Date of this Certificate: 25 April 2026

Certificate Expiry: 24 April 2029

(subject to the company maintaining its system to the
required standard)



1st Surveillance Due: 24 April 2027

2nd Surveillance Due: 24 April 2028

Issue & Revision No: 01 & NA

Certificate No:- 0425E575026

To Verify this Certificate please visit at www.otabucert.com




Dr. Anita Gupta
(Managing Director)

*Validity of the certificate is subject to successful completion of surveillance audit on or before due date (in case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal). *This Certificate of Registration remains the Property of Otabu Certification Pvt. Ltd. and shall be returned immediately upon request.

ISO Certificates



Certificate of Registration

RAWAEE AL TASHIED FOR INDUSTRY COMPANY (RTCO)

16 BUILDING NO. 3048, P.O.BOX: 16455, AL KHARJ KSA

has been assessed and Certified by Otabu Certification Pvt. Ltd.
as meeting the requirements of:

ISO 45001:2018

Occupational Health & Safety Management System

For the following scope of activities:

READY-MIX CONCRETE, BLOCKS & CONSTRUCTION AGGREGATES.

Date of Initial Registration: 25 April 2026
Date of this Certificate: 25 April 2026
Certificate Expiry: 24 April 2029
(subject to the company maintaining its system to the
required standard)



1st Surveillance Due: 24 April 2027
2nd Surveillance Due: 24 April 2028
Issue & Revision No: 01 & NA

Certificate No:- 04250575126

To Verify this Certificate please visit at www.otabucert.com




Dr. Anita Gupta
(Managing Director)

*Validity of the certificate is subject to successful completion of surveillance audit on or before due date (in case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal). *This Certificate of Registration remains the Property of Otabu Certification Pvt. Ltd. and shall be returned immediately upon request.

NRMCA Certificates

National Ready Mixed Concrete Association



Certificate of Conformance For Concrete Production Facilities

THIS IS TO CERTIFY THAT

Jeddah Portable Plant A, Jeddah, Saudi Arabia
Rawaei AlTashied For Industry Company RTCO

has been inspected by the undersigned licensed professional engineer for conformance with the requirements of the *Check List for Ready Mixed Concrete Production Facilities*. As of the inspection date, the facilities met the requirements for production by

***Central Mixing with Automatic Batching and Recordings of
Cementitious Materials, Aggregate, Water, and Chemical Admixtures***



Signature of Licensed Professional Engineer

June 10, 2024

Inspection Date

June 10, 2026

Certification Expiration Date

This company will maintain these facilities in compliance with the *Check List* requirements and will correct promptly any deficiencies which develop.

Signature of Company Official

Title of Company Official

NOTICE: The Check List indicates only that plant facilities are satisfactory for the production of concrete when properly operated. Conformance of the concrete itself with specification requirements must be verified by usual inspection methods in accordance with sales agreements.

This certificate is issued by the National Ready Mixed Concrete Association on verification that the production facility conforms to the requirements of the NRMCA Certification of Ready Mixed Concrete Production Facilities, QC3. Unauthorized reproduction or misuse of this certificate may result in legal action.

Plant ID #: 862398

Certification ID #: 32540

© 1965, 1992, 2001, 2002, 2006, 2007, 2012

National Ready Mixed Concrete Association 66 Canal Center Plaza, Suite 250 • Alexandria • Virginia 22314

NRMCA Certificates

National Ready Mixed Concrete Association



Certificate of Conformance For Concrete Production Facilities

THIS IS TO CERTIFY THAT

Jeddah Portable Plant B, Jeddah, Mekkah

Rawae Altashied For Industry Company RTCO

has been inspected by the undersigned licensed professional engineer for conformance with the requirements of the *Check List for Ready Mixed Concrete Production Facilities*. As of the inspection date, the facilities met the requirements for production by

*Central Mixing with Automatic Batching and Recordings of
Cementitious Materials, Aggregate, Water, and Chemical Admixtures*



(Seal)

Signature of Licensed Professional Engineer

June 10, 2024

Inspection Date

June 10, 2026

Certification Expiration Date

This company will maintain these facilities in compliance with the *Check List* requirements and will correct promptly any deficiencies which develop.

Signature of Company Official

Title of Company Official

NOTICE: The Check List indicates only that plant facilities are satisfactory for the production of concrete when properly operated. Conformance of the concrete itself with specification requirements must be verified by usual inspection methods in accordance with sales agreements.

This certificate is issued by the National Ready Mixed Concrete Association on verification that the production facility conforms to the requirements of the NRMCA Certification of Ready Mixed Concrete Production Facilities, QC3. Unauthorized reproduction or misuse of this certificate may result in legal action.

Plant ID #: 862399

Certification ID #: 32541

© 1965, 1992, 2001, 2002, 2006, 2007, 2012

National Ready Mixed Concrete Association 66 Canal Center Plaza, Suite 250 • Alexandria • Virginia 22314



Various Clients & Municipalities Approvals



Various Clients & Municipalities Approvals



Our Clients



Various Clients & Ministries Approvals

عام (خارجي) - Public External

ENGINEERING & PROJECTS DEVELOPMENT SECTOR
ENGINEERING AND DESIGN DEPARTMENT
INTERNAL CORRESPONDENCES

قطاع الهندسة وتطوير
المشاريع
إدارة الهندسة والتصميم
مراسلات داخلية



نقل الكهرباء
National Grid SA

ENGINEERING & DESIGN DEPARTMENT
ENGINEERING DIVISION - WOA
Building, Jeddah, SEC-HQ

SUBMITTAL REVIEW REPLY FORM - CIVIL

LETTER No. : 30501201/45120-J/25
Date: : 16-10-1446H (14-04-2025 G)
To : **Division/Project Manager, PROJECTS DEPT-WOA**
PROJECT TITLE : CONSTRUCTION OF JAZERA ROYAL PALACE 110/13.8KV
SUBSTATION THUWAL
CONTRACT No. : 4400020471
SUBMITTAL REFERENCE No. : DTS 177 R3
CONTRACTOR REF. No. : NE/N.GRID/4400020471/DTS-177
CONTRACTOR NAME : NESMA INFRASTRUCTURE & TECHNOLOGY CO. LTD
SUBJECT : CONCRETE MIX DESIGN (RTCO READY MIX) FOR SUBSTATION

Status Code of Submittal:



(A) Acceptable



(B) Acceptable with minor
comments/notes/remarks



(C) Comments



(D) Rejected

Kindly find the E&DD-Comments/Observations in the Attachment:

If you have any question, please contact on Ext. 37457

In case of Status (A) & (B):

In the view of the above contractor shall be advised to proceed with the work in compliance to the above- mentioned comments.

The given above approval does not relieve the contractor from his contractual responsibility & obligation to meet all requirements of contract SOW & TS.

Regards,

NAIF AL RETHEA

Substation & Transmission Line Section Head
Engineering & Design Division-WOA

MMT

CC: 1. Division Manager, E&DD-WOA
Attachments: 1. Comment sheet



Various Clients & Ministries Approvals

ENGINEERING & PROJECTS DEVELOPMENT
SECTOR
ENGINEERING AND DESIGN DEPARTMENT
INTERNAL CORRESPONDENCES

قطاع الهندسة وتطوير المشاريع
إدارة الهندسة والتصميم
مراسلات داخلية



نقل الكهرباء
National Grid SA

ENGINEERING & DESIGN DEPARTMENT
ENGINEERING DIVISION – WOA
Building, Jeddah, SEC-HQ

SUBMITTAL REVIEW REPLY FORM – CIVIL

LETTER No. : 30501201 / 37458-J / 24
Date: : 10-05-1446H (12 -11 -2024 G)
To : Division\Project Manager, PROJECTS DEPT-WOA
PROJECT TITLE : REPLACEMENT AND REROUTING OF 110KV
UNDERGROUND CABLE CIRCUITS SEASIDE SUBSTATION -
KHALIDIYAH BSP
CONTRACT No. : 19678
SUBMITTAL REFERENCE No. : DTS-31-R03
CONTRACTOR REF. No. : CEP/SEC/4400019678 /DTS-031 R03
CONTRACTOR NAME : CEPCO.
SUBJECT : CONCRETE MIX DESIGN-REV. #03

Status Code of Submittal:



(A) Acceptable



(B) Acceptable with minor
comments/notes/remarks



(C) Comments



(D) Rejected

Kindly find the E&DD-Comments/Observations in the Attachment:

If you have any question, please contact on Ext. 37457

In case of Status (A) & (B):

In the view of the above contractor shall be advised to proceed with the work in compliance to the above- mentioned comments.

The given above approval does not relieve the contractor from his contractual responsibility & obligation to meet all requirements of contract SOW & TS.

Regards,

SNA

NAIF AL RETHEA

Substation & Transmission Line Section Head
Engineering & Design Division-WOA

CC: 1. Division Manager, E&DD-WOA
Attachments: 1. Comments Sheet
2. ATTACHMENT-1



Various Clients & Ministries Approvals

ENGINEERING & PROJECTS DEVELOPMENT SECTOR ENGINEERING AND DESIGN DEPARTMENT INTERNAL CORRESPONDENCES	قطاع الهندسة وتطوير المشاريع إدارة الهندسة والتصميم مراسلات داخلية	 نقل الكهرباء National Grid SA
---	--	--

ENGINEERING & DESIGN DEPARTMENT
ENGINEERING DIVISION - WOA
Building, Jeddah, SEC-HQ

SUBMITTAL REVIEW REPLY FORM - CIVIL

LETTER No. : 30501201 / 38108-J / 24
Date: : 24-05-1446H (26 -11 -2024 G)
To : Division\Project Manager, PROJECTS DEPT-WOA
PROJECT TITLE : REROUTING AND REPLACEMENT OF 110KV UGC MHM
AD05- ABS AD06 IN WOA
CONTRACT No. : 4400018953
SUBMITTAL REFERENCE No. : DTS-039-R03
CONTRACTOR REF. No. : CEP/NGSA/4400018953/D-039 R03.
CONTRACTOR NAME : CEPCO
SUBJECT : CONCRETE MIX DESIGN -REV. #03

Status Code of Submittal:

☒ (A) Acceptable	☐ (B) Acceptable with minor comments/notes/remarks
☐ (C) Comments	☐ (D) Rejected


Kindly find the E&DD-Comments/Observations in the Attachment:

If you have any question, please contact on Ext. 37457

In case of Status (A) & (B):
In the view of the above contractor shall be advised to proceed with the work in compliance to the
above- mentioned comments.
**The given above approval does not relieve the contractor from his contractual
responsibility & obligation to meet all requirements of contract SOW & TS.**

Regards,

SNA


NAIF AL RETHEA
Substation & Transmission Line Section Head
Engineering & Design Division-WOA

CC: 1. Division Manager, E&DD-WOA
Attachments: 1. Comments Sheet
2. ATTACHMENT-1

Various Clients & Ministries Approvals

ENGINEERING & PROJECTS DEVELOPMENT
SECTOR
ENGINEERING AND DESIGN DEPARTMENT
INTERNAL CORRESPONDENCES

قطاع الهندسة وتطوير المشاريع
إدارة الهندسة والتصاميم
مراسلات داخلية



نقل الكهرباء
National Grid SA

ENGINEERING & DESIGN DEPARTMENT
ENGINEERING DIVISION – WOA
Building, Jeddah, SEC-HQ

SUBMITTAL REVIEW REPLY FORM – CIVIL

LETTER No. : 30501201 / 44892-J / 25
Date: : 11-10-1446H (09-04-2025 G)
To : Division\Project Manager, PROJECTS DEPT-WOA
PROJECT TITLE : CONSTRUCTION OF JAZERA ROYAL PALACE 110/13.8KV
SUBSTATION THUWAL
CONTRACT No. : 4400020471
SUBMITTAL REFERENCE No. : DTS-560-R03
CONTRACTOR REF. No. : NE/N.GRID/4400020471/DTS-560 R03
CONTRACTOR NAME : NESMA INFRASTRUCTURE & TECHNOLOGY CO. LTD.
SUBJECT : CONCRETE MIX DESIGN FOR OHTL (RTCO) -REV.
#03

Status Code of Submittal:



(A) Acceptable



(B) Acceptable with minor
comments/notes/remarks



(C) Comments



(D) Rejected

Kindly find the E&DD-Comments/Observations in the Attachment:

If you have any question, please contact on Ext. 37457

In case of Status (A) & (B):

In the view of the above contractor shall be advised to proceed with the work in compliance to the above- mentioned comments.

The given above approval does not relieve the contractor from his contractual responsibility & obligation to meet all requirements of contract SOW & TS.

Regards,

NAIF AL RETHEA

Substation & Transmission Line Section Head
Engineering & Design Division-WOA

SNA

CC: 1. Division Manager, E&DD-WOA

Attachments: 1. Comments Sheet

2. ATTACHMENT-1



Various Clients & Ministries Approvals

شركة التعمير والإنشاء المحدودة
BUILDING CONSTRUCTION CO. LTD.



Building Construction Company
King Faisal Street, Al Rawabi
P.O Box 30730
Khobar, Ash Sharqiyah 31952
P: +966138013939
F: +966138967916

Project: Nesaj Sadar
Makkah

Submittal #BCC-NSJ10182-PQD-CIV-0014.0 - RTCO Profile (JEDDAH Branch) BCC-NSJ10182-PQD-CIV - Pre-Qualification-Civil

Distribution Summary

Distributed by Rafiz Hussain (Building Construction Company) on 28 Jun, 2026

To Rafiz Hussain (Building Construction Company)
Message None
Attachments RTCO Profile (JEDDAH Branch) Compressed.pdf

Name	Response	Attachments	Comments
Mohamed Hussein (Ahmed Al Mousa Engineering Consultants)	Approved as Noted		
Yousof Adam (Ahmed Al Mousa Engineering Consultants)	Approved as Noted		RTCO is approved as a supplier for ready-mix concrete only within the project scope; This approval is limited exclusively to concrete products and does not extend to any other materials or systems offered by the company unless separately submitted and evaluated according to the established approval procedures. - Follow the specifications of the Project align with SASO. - Follow the guidelines of the SAUDI Building Code. - Follow the specifications of ARAC Interior Design.
Abdulrahman Abualnaser (Nesaj Project Management Co.)	Approved as Noted		
Mahmoud Hanafy Mahmoud (Nesaj Project Management Co.)	Approved as Noted		
Akram Shaaban (Nesaj Project Management Co.)	Approved as Noted		

Revision	0	Submittal Manager	Rafiz Hussain (Building Construction Company)
Status	Approved as noted (B)	Date Created	21 Jun, 2026
Issue Date	21 Jun, 2026	Spec Section	BCC-NSJ10182-PQD-CIV - Pre-Qualification-Civil
		Received From	Rafiz Hussain (Building Construction Company)
Final Due Date	23 Jun, 2026	Lead Time	
Location	All Areas	Type	Document

Submittal Package

Approvers Mohamed Hussein (Ahmed Al Mousa Engineering Consultants), Yousof Adam (Ahmed Al Mousa Engineering Consultants), Abdulrahman Abualnaser (Nesaj Project Management Co.), Mahmoud Hanafy Mahmoud (Nesaj Project Management Co.), Akram Shaaban (Nesaj Project Management Co.)

Various Clients & Ministries Approvals

Ball in Court

Distribution

Description

Discipline Civil Activity Cast in Place Concrete


Ready for
Inspection on

Submittal Workflow

Name	Sent Date	Due Date	Returned Date	Response	Attachments
General Information Attachments					RTCO Profile (JEDDAH Branch) Compressed.pdf
Mohamed Hussein	27 Jun, 2026	23 Jun, 2026	27 Jun, 2026	Approved as noted	
Yousof Adam	22 Jun, 2026	23 Jun, 2026	27 Jun, 2026	Approved as noted	
Comment	RTCO is approved as a supplier for ready-mix concrete only within the project scope; This approval is limited exclusively to concrete products and does not extend to any other materials or systems offered by the company unless separately submitted and evaluated according to the established approval procedures. - Follow the specifications of the Project align with SASO. - Follow the guidelines of the SAUDI Building Code. - Follow the specifications of ARAC Interior Design.				
Abdulrahman Abualnasr	27 Jun, 2026	23 Jun, 2026	27 Jun, 2026	Approved as noted	
Mahmoud Hanafy Mahmoud	27 Jun, 2026	23 Jun, 2026	27 Jun, 2026	Approved as noted	
Akram Shaaban	27 Jun, 2026	23 Jun, 2026	27 Jun, 2026	Approved as noted	

Various Clients & Ministries Approvals

OWNER:



Khulis One Renewable Energy Company

شركة خليص الأولى للطاقة المتجددة
KHULIS ONE RENEWABLE ENERGY COMPANY

OWNER'S ENGINEER:



CONTRACTOR:



中国能建沙特福里斯光伏电站联营体项目部
CEEC EPC JV OF KHULIS PV PROJECT-KSA

CONTRACTOR CONSULTANT:







中国电力工程顾问集团西北电力设计院有限公司
NORTHWEST ELECTRIC POWER DESIGN INSTITUTE CO., LTD. OF CHINA POWER ENGINEERING CONSULTING GROUP

B	22-09-2025	Abdul Saboor	Abdul Saboor	Chris Yang	ISSUED FOR APPROVAL
A	03-08-2025	Abdul Saboor	Abdul Saboor	Chris Yang	ISSUED FOR APPROVAL
REV	DATE	PREPARED	CHECKED	APPROVED	DESCRIPTION
PROJECT:		Khulis 2.0 GW Solar PV IPP Project			
DOCUMENT TITLE:		Batching Plant-RTCO Profile-Prequalification document			
DOCUMENT NO.:		SAU1008-G000-___-&CQA-76001		REV	B
				ISSUED FOR	IFA
PLACE RESERVED FOR STAMPS:					



Various Clients & Ministries Approvals

 المقاول شركة مجموعة النخلات الثلاث		 الاستشاري شركة سماء للاستشارات الهندسية		الشؤون الإدارية والمالية الإدارة العامة للمشتون الهندسية			
REQUEST FOR MATERIAL & EQUIPMENT APPROVAL طلب الموافقة على: مواد ، معدات ، أدوات							
Project no. / رقم المشروع	TJC 122	Project name / اسم المشروع	إنشاء مجمع إداري بمحافظة جدة				
Contractor / المقاول	شركة مجموعة النخلات الثلاث	REQUEST FOR MATERIAL no. / رقم طلب معاينة المواد	DOC/TJC122/TPT/MS-S/19-R0				
Date / تاريخ	18-04-2024	Spec/Drawing Reference no. / رقم مرجع المواصفة/المخطط					
Application: ☐ Civil / مدني ☐ Architectural / معماري ☐ Structural / انشائي ☐ Mechanical / ميكانيكي ☐ Electrical / كهربائي ☐ Others / أخرى: _____							
References / المراجع ☐ Catalogues / دليل المستخدم ☐ Drawings / المخططات ☐ Certifications / الشهادات ☐ Samples / العينات ☐ Test / اختبار ☐ Calculations / الحسابات ☐ Specifications / المواصفات ☐ Others / أخرى: _____							
Item # / رقم البند	Description / الوصف	Quantity / الكمية	Manufacturer/ Supplier / المورد / المصنع	Country of Origin / بلد المنشأ	Specs. Ref. / مرجع المواصفات	Drawing Ref. / مرجع المخططات	Action Code / رمز الحالة
1	تأهيل مورد		شركة رواج التشييد للصناعة	السعودية		STRUCTURAL	
Action Code / رمز الحالة: A = Approved / موافقة ☒ B = Approved as noted / موافقة مع شروط ☐ C = Resubmit / إعادة تقديم حسب الملاحظات ☐ D = Rejected / مرفوض ☐							
Contractor Signature & Stamp / توقيع المقاول و الختم Name / الاسم:  Signature / التوقيع:  Date / التاريخ: 20 APR 2024				We certify that above submitted items are correct and in strict compliance to the project drawings, specification, and contract except otherwise stated. نصادق على صحة البنود المستلمة أعلاه وكذلك على الالتزام بالام بمخططات المشروع والمواصفات والعقد باستثناء ما ينص على خلاف ذلك			
Consultant Comments and Remarks / ملاحظات وملاحظات الاستشاري لا اعتماد وفتح يجب تقديم خطة تصحيحية على خطة تجريبية للخرسانة بموافقة MPA وبإعني أنه اجتمعت المخططات لعملية كبر من إيطالات الخرسانة الخشبية ويراعى ذلك في تصميم الخلطة حيث أن المخطط لعملية يتم في ظروف مشابهة وفي حالة في درج حرارة مكالمات معالجة وما إلى ذلك							
Approval Section / القبول Consultant Technical Team / الفريق الفني للاستشاري Reviewed by / راجعها:  Name / الاسم:  Signature / التوقيع:  Date / التاريخ: 				Project manager / اعتماد مدير المشروع Noted by / لاحظها:  Name / الاسم:  Signature / التوقيع:  Date / التاريخ: 			

Various Clients & Ministries Approvals

 المقاول شركة مجموعة النخلات الثلاث	 الاستشاري شركة سماء للاستشارات الهندسية	المسؤول الإداري والمالية الإدارة العامة للمشتريات الهندسية
--	---	---


REQUEST FOR MATERIAL & EQUIPMENT APPROVAL							
طلب الموافقة على: مواد ، معدات ، أدوات							
Project no. رقم المشروع	TJC 122	Project name اسم المشروع	إنشاء مجمع إداري بمحافظة جدة				
Contractor المقاول	شركة مجموعة النخلات الثلاث	REQUEST FOR MATERIAL no. رقم طلب معاينة المواد	DOC/TJC122/TPT/MAT-S/27-R0				
Date التاريخ	21-04-2024	Spec/Drawing Reference no. رقم مرجع المواصفة/المخطط					

Application:			
☒ Civil / مدني	☐ Architectural / معماري	☐ Structural / انشائي	☐ Mechanical / ميكانيكي
☐ Electrical / كهربائي	☐ Others / أخرى		


References / المراجع			
☐ Catalogues / دليل المستخدم	☐ Drawings / المخططات	☐ Certifications / الشهادات	☐ Samples / العينات
☐ Test / اختبار	☐ Calculations / الحسابات	☐ Specifications / المواصفات	☐ Others / أخرى

Item # رقم البند	Description الوصف	Quantity الكمية	Manufacturer/ Supplier المورد / المصنع	Country of Origin بلد المنشأ	Specs. Ref. مرجع المواصفات	Drawing Ref. مرجع المخططات	Action Code رمز الحالة
1	CONCRETE MIX DESIGN		شركة روائع التشييد للصناعة (RTCO)	السعودية		STRUCTURAL	B

Action Code رمز الحالة	A = Approved / موافقة	B = Approved as noted موافقة مع شروط	C = Resubmit إعادة تقديم حسب الملاحظات	D = Rejected مرفوض
------------------------	-----------------------	--------------------------------------	--	--------------------

Contractor Signature & Stamp توقيع المقاول و الختم Name:  Signature:  Date: 08 MAY 2024	 We certify that above submitted items are correct and in strict compliance to the project drawings ,specification, and contract except otherwise stated نصادق على صحة البود المستلمة أعلاه وكذلك على الالتزام التام بمخططات المشروع، والمواصفات والعقد باستثناء ما ينص على خلاف ذلك
--	---

يجب عمل خطط تجريبية لكل اجزاء من حديد وكبر
بعد سبعة ايام وبعده 28 يوم
الاجراءات الاعلى يتم عرضها في المياه لما لجه سلة 24 ساعة يومياً
والجهد وفي درجات حرارة مناسبة وفي ظروف مثالية تحالفهم معالجة لم كانت في الموقع
مدير المشروع في 21/4/2024

Approval Section / القول	
Consultant Technical Team الفريق الفني الاستشاري	Project manager اعتماد مدير المشروع
Reviewed by / تراجعها:	Noted by / لاحظها:
Name / الاسم:	Name / الاسم: 
Signature / التوقيع:	Signature / التوقيع: 
Date / التاريخ:	Date / التاريخ: 21/04/2024

Various Clients & Ministries Approvals

PDS-001 (2014/15)	
 الشركة السعودية للكهرباء Saudi Electricity Company مجلس إدارته Jeddah Projects Program	
Projects Department - WOA	
INSPECTION REQUEST (General)	
PROJECT TITLE :	CONSTRUCTION OF A NEW 110/13.8 KV SUBSTATION ABHOUR HOUSING AT ALBUHAYRAT AREA IN JEDDAH
CONTRACT NUMBER :	25000007
CONTRACTOR NAME :	Civil and Electrical Projects Contracting Company
CIVIL SUBCONTRACTOR :	United Construction Contracting Co.
APPROVED LABORATORY :	Osaimi
RFI NO. : ABHH-RFI-Civ-002-01 A	
TO BE FILLED-IN BY THE CONTRACTOR	
Send this Inspection Request 24 hours in advance of the required Inspection Time	
INSPECTION CATEGORY	
☒ Civil	☐ Electro-Mechanical ☐ Others
1. Item for Inspection : Inspection of Trial mix for C-17	
2. Relevant Specification and Drawings : PTS # 23WN1082 -	
3. Location : RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)	
4. Time, Day & Date : 10:00 AM Wednesday, 30 July 2025	
Engr. Ali Aljedani	30-Jul-25 0534718774
Contractor's QA/QC Engineer Name	Signature Date Telephone & Fax
Inspection will be Conducted when this Inspection Request is Signed by the Company Engineer	
Project Engineer PD/CEMPD	Signature Date Mobile Phone Office Fax
TO BE FILLED-IN BY THE COMPANY :	
Inspection Date & Time - Actual :	
Inspection Comments : <i>Witness done during 28-days Curing</i> <i>Test at Lab found good result as per To-Ins-03 Rev-01.</i>	
<i>Refer to the attached letter compare the test results by data sheet / location</i>	
Inspection Result :	
☒ ACCEPTABLE, PROCEED FOR SUBSEQUENT ACTIVITY	
☐ COMPLY WITH THE ABOVE COMMENTS AND PROCEED FOR SUBSEQUENT ACTIVITY	
☐ NOT ACCEPTABLE / NOT READY FOR INSPECTION - SUBMIT RE-INSPECTION REQUEST	
INSPECTED BY SEC ENGINEER	
Signature :	Signature :
Name : Engr. Arshad Mohiddin	Name : Engr. Omar Babiker
Title : SEC - PE	Title : Construction Manager

Various Clients & Ministries Approvals

 الشركة السعودية للكهرباء Saudi Electricity Company بالشراكة مع القطاع الخاص		Projects Department - WOA Jeddah Projects Program	
INSPECTION REQUEST (General)			
PROJECT TITLE :		CONSTRUCTION OF A NEW 110/13.8 KV SUBSTATION ABHOUR HOUSING AT ALBUHAYRAT AREA IN JEDDAH	
CONTRACT NUMBER :		25000007	
CONTRACTOR NAME :		Civil and Electrical Projects Contracting Company	
CIVIL SUBCONTRACTOR :		United Construction Contracting Co.	
APPROVED LABORATORY :		Osaimi	
TO BE FILLED-IN BY THE CONTRACTOR Send this Inspection Request 24 hours in advance of the required Inspection Time			
INSPECTION CATEGORY			
☒ Civil ☐ Electro-Mechanical ☐ Others			
1. Item for Inspection : Inspection of Trial mix for C-21			
2. Relevant Specification and Drawings : PTS # 23WN1082 -			
3. Location : RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)			
4. Time, Day & Date : 10:00 AM Wednesday, 30 July 2025			
Engr. Ali Aljedani		30-Jul-25	
Contractor's QA/QC Engineer Name		Signature	
Inspection will be Conducted when this Inspection Request is Signed by the Company Engineer		Date	
Project Engineer PD/CEMPD		Mobile Phone	
Signature		Office Fax	
TO BE FILLED-IN BY THE COMPANY :			
Inspection Date & Time - Actual :			
Inspection Comments : <i>Witness done during 28-days Cracking test at lab found Satisfying results as per 70-114 ss-03 Rev.01</i>			
<i>Refer to the attached Compressive test results & data sheet / load test</i>			
Inspection Result :			
☒ ACCEPTABLE, PROCEED FOR SUBSEQUENT ACTIVITY ☐ COMPLY WITH THE ABOVE COMMENTS AND PROCEED FOR SUBSEQUENT ACTIVITY ☐ NOT ACCEPTABLE / NOT READY FOR INSPECTION - SUBMIT RE-INSPECTION REQUEST			
INSPECTED BY SEC ENGINEER		RECEIVED BY CONTRACTOR ENGINEER	
Signature :		Signature :	
Name : Engr. Arshad Mohiddin		Name : Engr. Omar Babiker	
Title : SEC - PE		Title : Construction Manager	

Various Clients & Ministries Approvals

PDS-001 (2014/15)	
 الشركة السعودية للكهرباء Saudi Electricity Company تأسست بالقانون رقم ١٠١ لسنة ١٩٧٤ م	
Projects Department - WOA Jeddah Projects Program	
INSPECTION REQUEST (General)	
PROJECT TITLE :	CONSTRUCTION OF A NEW 110/13.8 KV SUBSTATION ABHOUR HOUSING AT ALBUHAYRAT AREA IN JEDDAH
CONTRACT NUMBER :	25000007
CONTRACTOR NAME :	Civil and Electrical Projects Contracting Company
CIVIL SUBCONTRACTOR :	United Construction Contracting Co.
APPROVED LABORATORY :	Osaimi
TO BE FILLED-IN BY THE CONTRACTOR Send this Inspection Request 24 hours in advance of the required Inspection Time	
INSPECTION CATEGORY ☒ Civil ☐ Electro-Mechanical ☐ Others	
1. Item for Inspection : Inspection of Trial mix for C-36	
2. Relevant Specification and Drawings : PTS # 23WN1082 -	
3. Location : RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)	
4. Time, Day & Date : 10:00 AM Wednesday, 30 July 2025	
Engr. Ali Aljedani	30-Jul-25
Contractor's QA/QC Engineer Name	Signature
Inspection will be Conducted when this Inspection Request is Signed by the Company Engineer	Date
Project Engineer PD/CEMPD	Mobile Phone
Signature	Office Fax
TO BE FILLED-IN BY THE COMPANY :	
Inspection Date & Time - Actual :	
Inspection Comments : <i>Witness done during 10-day's crushing test at laboratory found satisfying results as per To-TMS-03 Rev-01</i>	
<i>Refer to the attached Compressive test results as date sheet / load sheet</i>	
Inspection Result : ☒ ACCEPTABLE, PROCEED FOR SUBSEQUENT ACTIVITY ☐ COMPLY WITH THE ABOVE COMMENTS AND PROCEED FOR SUBSEQUENT ACTIVITY ☐ NOT ACCEPTABLE / NOT READY FOR INSPECTION - SUBMIT RE-INSPECTION REQUEST	
INSPECTED BY SEC ENGINEER	
Signature :	Signature :
Name : Engr. Arshad Mohiddin	Name : Engr. Omar Babiker
Title : SEC - PE	Title : Construction Manager

Various Clients & Ministries Approvals

 Projects Department - WOA Jeddah Projects Program	
INSPECTION REQUEST (General)	
PROJECT TITLE :	CONSTRUCTION OF A NEW 110/13.8 KV SUBSTATION ABHOUR HOUSING AT ALBUHAYRAT AREA IN JEDDAH
CONTRACT NUMBER :	25000007
CONTRACTOR NAME :	Civil and Electrical Projects Contracting Company
CIVIL SUBCONTRACTOR :	United Construction Contracting Co.
APPROVED LABORATORY :	Osaimi
RFI NO. : ABHH-RFI-Civ-002-01 D	
TO BE FILLED-IN BY THE CONTRACTOR	
Send this Inspection Request 24 hours in advance of the required Inspection Time	
INSPECTION CATEGORY	
☒ Civil ☐ Electro-Mechanical ☐ Others	
1. Item for Inspection :	Inspection of Trial mix for C-38
2. Relevant Specification and Drawings :	PTS # 23WN1082 -
3. Location :	RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)
4. Time, Day & Date :	10:00 AM Wednesday, 30 July 2025
Engr. Ali Aljedani	30-Jul-25
Contractor's QA/QC Engineer Name	Signature
Inspection will be Conducted when this Inspection Request is Signed by the Company Engineer	
Project Engineer PD/CEMPD	Signature
Date	Mobile Phone
Office Fax	
TO BE FILLED-IN BY THE COMPANY :	
Inspection Date & Time - Actual :	
Inspection Comments :	Withins date during 13-day's Crashing test at laboratory found Satisfying Results as per To-Test-30kva-1 Refer to the attach Compressive test results & data sheet / inspection
Inspection Result :	
☒ ACCEPTABLE, PROCEED FOR SUBSEQUENT ACTIVITY ☐ COMPLY WITH THE ABOVE COMMENTS AND PROCEED FOR SUBSEQUENT ACTIVITY ☐ NOT ACCEPTABLE / NOT READY FOR INSPECTION - SUBMIT RE-INSPECTION REQUEST	
INSPECTED BY SEC ENGINEER	
Signature :	
Name :	Engr. Arshad Mohiddin
Title :	SEC - PE
RECEIVED BY CONTRACTOR ENGINEER	
Signature :	
Name :	Engr. Omar Babiker
Title :	Construction Manager

Various Clients & Ministries Approvals



اتفاقية الخدمات الهندسية والاستشارية لتقديم خدمات الاشراف على تنفيذ
مشاريع المياه والصرف الصحي بالقطاع الغربي

مشروع تنفيذ خط جديد لاستبدال الخط القائم (600) ملم اسبستوس غرب
طريق المدينة حتى بداية مشروع الاسكان رقم (401240194)
الموضوع / اعتماد الخلطة التصميمية للخرسانة المسلحة

التاريخ: 2025/07/22 م

الموافق: 1447/01/27 هـ

الرقم: (BK10230263-WRJ-2025-3200)

وفقه الله

صورة مع التعمية / سعادة / المدير التنفيذي للإنشاءات بمحافظة جدة

للمتضمن

السادة شركة مصام قباني وشركاه للإنشاءات والصيانة

...السلام عليكم ورحمة الله وبركاته، ...

بالإشارة الى الموضوع اعلاه والى مشروع تنفيذ خط جديد لاستبدال الخط القائم (600) ملم اسبستوس غرب طريق المدينة حتى بداية
مشروع الإسكان رقم (401240194) والى خطابكم رقم S126/BAFEC/134 بتاريخ 16/07/2025 بشأن طلب اعتماد الخرسانة
المسلحة " شركة روائع التشييد للصناعة" :

م	اسم المصنع والمورد	نوع المواد
1	شركة روائع التشييد للصناعة	الخرسانة المسلحة

وبعد الدراسة والمراجعة نفيدكم بأنه لا مانع من اعتماد شركة روائع التشييد للصناعة لتوريد المواد المذكورة أعلاه على ان يتم عمل
الخلطات الخرسانية التجريبية واختبارها من طرف ثالث واعتمادها منا قبل التوريد على ان تكون مطابقة للمواصفات والاشتراطات
القياسية بشركة المياه الوطنية.

ولكم تحياتنا ...



Various Clients & Ministries Approvals

ISAM KABBANI AND PARTNERS
FOR CONSTRUCTION AND MAINTENANCE
KABBANI CONSTRUCTION GROUP
SPECIAL PROJECTS DIVISION



شركة عصام قباني وشركاه
للإنشاءات والصيانة
مجموعة القباني للإنشاءات
المشاريع الخاصة

التاريخ: 2025/07/16 م

الرقم: S126/BAFEC/134

- الموضوع :- اعتماد المواد (الخرسانة المسلحة)

السادة/بيت الخبرة للإستشارات الهندسية المحترمين

السلام عليكم ورحمة الله وبركاته،،،

إشارة إلى مشروع "إنشاء خط جديد لإستبدال الخط الأسبستوس القائم قطر 600 ملم رقم (401240194) مقابلتنا.

نتقدم لسعادتكم بطلب اعتماد الخرسانة المسلحة " شركة روائع التشيد للصناعة " مرفق اليكم كتالوج المنتج وكامل النماذج والأوراق المطلوبة.

نأمل التفضل بالتوجيه نحو المراجعة والاعتماد

وتفضلوا بقبول فائق التقدير والاحترام،،،

ولكم جزيل الشكر،



المرفقات :-
1- الكتلوج الفني
2- نماذج الاعتماد



Various Clients & Ministries Approvals

  	
المشروع: مشروع إنشاء خط جديد لإستبدال الخط الأسبستوس القائم قطر 600 ملم غرب طريق المدينة حتى بداية مشروع الإسكان الإستشاري: بيت الخبرة للإستشارات الهندسية المقاول: شركة عصام قباني وشركاه للإنشاءات والصيانة	
طلب اعتماد مواد	
خاص بالمقاول	
إعادة تقديم ☐	تقديم لأول مرة ☒
رقم التقديم: S126-MAT-35	تاريخ التقديم: 2025-07-16
اسم المورد :- شركة روائع التشيد للصناعة	رقم ووصف البنود بجداول الكميات مع صورة من البنود موضح عليها: Item no : (33.2.16) - (33.2.16.1) - (33.2.16.2) - (33.2.16.3) - (33.2.16.4) Item no : (33.2.17) - (33.2.17.2) - (33.2.17.3) Item no : (33.2.18) - (33.2.18.3) Item no : (33.2.19) - (33.2.20) - (33.2.21)
اسم المصنع :- شركة روائع التشيد للصناعة	توريد وإنشاء غرفة من الخرسانة المسلحة كما هو موضح بالمخططات والمواصفات والعمل يشمل الحفر والردم وأعمال الخرسانة المسلحة والعزل وتوريد وتركيب الغطاء والدرج وجميع القطع الخاصة والأبواب اللازمة لشبك الصمام وإعادة ترميم الأسطح لما هو عليه وكل ما يلزم لإنهاء العمل
مواصفات العقد (ترفق صورة من المواصفات في العقد)	اسم المادة و مواصفاتها
الخرسانة الجهزة	Page no. (76 to 100) of 1753 of spec.
تعهد المقاول بتعهد صحة جميع البيانات أعلاه وتحتفل كامل المسؤولية في حال وجود خطأ.	
الختم الرسمي	اسم مدير المشروع: م / محمد طريف التاريخ: توقيع مدير المشروع:
خاص بالإستشاري	
ملاحظات الإستشاري: موافق مع الاعتماد على إيداع عمل الملاحظات الفنية واقتراحات المهندسين بالنسبة واعتمادها على إيداع عمل الملاحظات الفنية واقتراحات المهندسين بشركة الجبهة الهندسية	
يعتمد حسب الملاحظات الموضحة ولا يحتاج إلى إعادة تقديم	يعتمد كما تقدم
مرفوض	يعتمد حسب الملاحظات الموضحة و يحتاج إلى إعادة تقديم
تعهد الإستشاري: نشهد بأن طلب التقديم المذكور أعلاه قد تمت مراجعته بالتفصيل وبدقة وتمت الموافقة مع شروط ومواصفات ومخططات العقد وهو مطابق.	
الختم الرسمي	اسم مدير المشروع: م / إسلام عبد المؤمن التاريخ: 22/07/2025 توقيع مدير المشروع:







Various Clients & Ministries Approvals

TRIAL MIX OF CONCRETE MIX DESIGN			
Project or Program name : REPLACEMENT AND REROUTING OF 110KV UNDERGROUND CABLE CIRCUITS BETWEEN SEA SIDE SUBSTATION - KHALDIYAH BSP .			
Construction work :	Trial Mix of the proposed Concrete Mix Design	Contract number :	4400019676
Contractor:	Civil & Electrical Projects Contracting Co. (CEPCO)	RFI N°	RFI-CIV-001
Inspection request #:	001	Job order number:	
Time :	11:00 Am	Day :	Wednesday
		Date :	04-September-2024
Place / Location:	RAWAEE AL TASHIED FOR INDUSTRY COMPANY BATCHING PLANT , JEDDAH K.S.A		
Reference drawing no. :	WD-0841836		
Reference specification :	TCSQ.113.03 / 70.TMSS.03		
I hereby confirm that the mentioned Work was checked by the Contractor and found to comply with NG-SA requirements.			
Contractor's QA/QC engineer signature :			
Contractor's QA/QC engineer name :	Mr. SYED ABDUL RAZZAQ	Date :	03-09-2024
Tel :	0571132471	Fax :	
		E-mail :	syed.ar@cepcoc-sa.com
1- Controlled items			
Level 2 control : control of the deliverables or of the sub-elements ou the work construction			
Selected sample for the level 2 control :	Trial Mix of Concrete Mix design C -38 Compressive Strength 38 Mpa .		
Controlled items :			
2) Notification of the Inspection manager			
The deliverable or the sub-element of the work construction is compliant with NG standards (see detail of the non compliant elements in the block 5)			YES NO ☒ ☐
Comments made following the controls (context of the control, ascertainties, reservations...)			
Witnessed the trial mix of the attached concrete mix design at RTCO Ready Mix Factory in Jeddah. The concrete mix ingredients and parameters were observed in accordance with the attached mix design. The compressive strength tests on the collected concrete samples were witnessed after 7 and 28 days, and the results showed a compressive strength exceeding the design requirements, as documented in the third-party reports attached.			YES NO ☐ ☒
Recommendation for additional controls (give details below if applicable)			
Name of the compliance officer:			Muhammad Zafar Niaz
Date :			04-Nov-2024
			SIGNATURE 

Various Clients & Ministries Approvals

				
Contractor's Submittal	IFMI-MT-STR-0074	Category	MT	
		Revision No.	0	
Project Title	مشروع دار سمو خيالاً			
Contract Title	عقد تنفيذ أصل البنية القوية لمخطط مشروع دار سمو الواقع في حي القلاح - مدينة جدة			
Contract No.	DARS-CON-SRE/ALAL-0001-00			
Submittal Title: RAWAEE ALTASHIED FOR READY-MIX - COMPANY PROFILE				
CATEGORY: RP= Report, SD= Shop Drawing, MD= Manufacturer's / Supplier's Data, MT= Material, SM= Sample, SC= Subcontractor, MS= Method Statement, CT= Certificate, TT= Test Result, GT= Guarantee, AS= As-Built Drawing, TS= Time Schedule, OT= Other				
We are sending herewith under separate cover the drawings / documents / samples listed below:				
Item No.	Dwgs. Specs. Boq Ref.	Description	Format	Copies
1.	-	RAWAEE ALTASHIED READY-MIX COMPANY PROFILE AND PREQUALIFICATION	HARD COPY	1
We certify that the documents / materials submitted herewith have been reviewed in detail and are in strict conformance with the contract drawings and specifications except as otherwise stated.				
Submitted by Contractor				
Name: Engr. AMR ASSY		Signature: 	Date: 2023-11-20	
Received by Consultant				
Name:		Signature: 	Date: 20 NOV 2023	
First Cycle Distribution: ☐ DM ☐ Consultants				
Consultant Review Comments				
<i>Submit concrete mix data sheet for 32, 28 and 21 grade</i> ☐ (A) Approved ☒ (B) Approved As Noted ☐ (C) As Noted, Resubmit ☐ (D) Not Approved ☐ (E) Not Required				
Submittal Sign Off by Consultant				
Name: <i>Amr Husein</i>		Signature: 	Date: 21/11/2023	
Development Manager (When necessary)				
Name:		Signature:	Date:	
Approved by Client (When necessary)				
Name:		Signature:	Date:	
Received by Contractor				
Name: MUHAMMAD ALAWI		Signature: 	Date: 21 NOV 2023	
Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the requirements of The Contract. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all quantities and dimensions, selecting fabrication processes and techniques of construction, coordinating his work with that of other trades and performing his work in a safe and satisfactory manner. Second Cycle Distribution: ☐ DM (Original) ☐ Client ☐ Consultants				

Various Clients & Ministries Approvals

	Louis Berger																													
Document Submittal																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Project Name:</td> <td colspan="2">Street repair project in the center and north of Jeddah, the construction of a road west of the Riyadh scheme, in the north of Jeddah</td> </tr> <tr> <td>Contractor:</td> <td>ROAD ACCOMPLISHMENT LTD.CO.</td> <td>LB Project ID: R4-22002</td> </tr> <tr> <td>Contract No.:</td> <td>16/001/0601/05/00/4</td> <td>Contractor Ref #: 0056</td> </tr> <tr> <td>Location:</td> <td>AL-RIYADH DIST, SEVERAL ST.</td> <td>Date: 27-Nov-23</td> </tr> </table>			Project Name:	Street repair project in the center and north of Jeddah, the construction of a road west of the Riyadh scheme, in the north of Jeddah		Contractor:	ROAD ACCOMPLISHMENT LTD.CO.	LB Project ID: R4-22002	Contract No.:	16/001/0601/05/00/4	Contractor Ref #: 0056	Location:	AL-RIYADH DIST, SEVERAL ST.	Date: 27-Nov-23																
Project Name:	Street repair project in the center and north of Jeddah, the construction of a road west of the Riyadh scheme, in the north of Jeddah																													
Contractor:	ROAD ACCOMPLISHMENT LTD.CO.	LB Project ID: R4-22002																												
Contract No.:	16/001/0601/05/00/4	Contractor Ref #: 0056																												
Location:	AL-RIYADH DIST, SEVERAL ST.	Date: 27-Nov-23																												
Please check appropriate box:																														
<table style="width: 100%;"> <tr> <td>☐ Letter</td> <td>☐ Technical Report</td> <td>☐ Drawings</td> </tr> <tr> <td>☐ Technical Submittal</td> <td>☐ GIS or CAD</td> <td>☐ Shop Drawing</td> </tr> <tr> <td>☐ Bill of Quantities</td> <td>☐ Job Order</td> <td>☐ Reports</td> </tr> <tr> <td>☐ Procedure or Methodology</td> <td>☐ Engineering Calculation</td> <td>☐ Test Reports</td> </tr> <tr> <td>☐ PM Plan</td> <td>☐ Schedule</td> <td>☐ Permissions</td> </tr> <tr> <td>☐ Product Data</td> <td>☐ As Built</td> <td>☐ Request for Information</td> </tr> <tr> <td>☒ Pre-qualification</td> <td>☐ Certificates</td> <td>☐ Manuals</td> </tr> <tr> <td>☐ Material Sample</td> <td>☐ Job Order Completion</td> <td>☐ Others (please specify)</td> </tr> </table>			☐ Letter	☐ Technical Report	☐ Drawings	☐ Technical Submittal	☐ GIS or CAD	☐ Shop Drawing	☐ Bill of Quantities	☐ Job Order	☐ Reports	☐ Procedure or Methodology	☐ Engineering Calculation	☐ Test Reports	☐ PM Plan	☐ Schedule	☐ Permissions	☐ Product Data	☐ As Built	☐ Request for Information	☒ Pre-qualification	☐ Certificates	☐ Manuals	☐ Material Sample	☐ Job Order Completion	☐ Others (please specify)				
☐ Letter	☐ Technical Report	☐ Drawings																												
☐ Technical Submittal	☐ GIS or CAD	☐ Shop Drawing																												
☐ Bill of Quantities	☐ Job Order	☐ Reports																												
☐ Procedure or Methodology	☐ Engineering Calculation	☐ Test Reports																												
☐ PM Plan	☐ Schedule	☐ Permissions																												
☐ Product Data	☐ As Built	☐ Request for Information																												
☒ Pre-qualification	☐ Certificates	☐ Manuals																												
☐ Material Sample	☐ Job Order Completion	☐ Others (please specify)																												
Purpose: ☐ For Information ☒ For Review & Approval ☐ As Requested																														
Subject: APPROVAL FOR RAWAEE AL-TASHIED (RTCO) FOR CONCRETE & CEMENT PRODUCTS.																														
Document Description:																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SR. No.</th> <th>Document No.</th> <th>Job Order # / BoQ #</th> <th>Document Name</th> <th>Rev.</th> <th>Hard Copy</th> <th>Soft Copy</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td></td> <td>RAWAEE AL-TASHIED (RTCO)</td> <td></td> <td style="text-align: center;">✓</td> <td></td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>			SR. No.	Document No.	Job Order # / BoQ #	Document Name	Rev.	Hard Copy	Soft Copy	1			RAWAEE AL-TASHIED (RTCO)		✓															
SR. No.	Document No.	Job Order # / BoQ #	Document Name	Rev.	Hard Copy	Soft Copy																								
1			RAWAEE AL-TASHIED (RTCO)		✓																									
<table style="width: 100%;"> <tr> <td style="width: 33%;"> LB Review & Approval Status ☒ A - Approved (Work may proceed) ☐ B - Approved as Noted (Work may proceed subject to Incorporation of Comments) ☐ C - Revise and Resubmit (Work may not proceed) ☐ D - Rejected ☐ E - For Information </td> <td style="width: 33%;"> Discipline / GIS Review Status RA/GC ENGINEER Name: BLASIM KANANA Sign:  Date: 04-12-2023 </td> <td style="width: 33%;"> Project Engineer Review & Approval Status Name:  Sign:  Date: </td> </tr> </table>			LB Review & Approval Status ☒ A - Approved (Work may proceed) ☐ B - Approved as Noted (Work may proceed subject to Incorporation of Comments) ☐ C - Revise and Resubmit (Work may not proceed) ☐ D - Rejected ☐ E - For Information	Discipline / GIS Review Status RA/GC ENGINEER Name: BLASIM KANANA Sign:  Date: 04-12-2023	Project Engineer Review & Approval Status Name:  Sign:  Date:																									
LB Review & Approval Status ☒ A - Approved (Work may proceed) ☐ B - Approved as Noted (Work may proceed subject to Incorporation of Comments) ☐ C - Revise and Resubmit (Work may not proceed) ☐ D - Rejected ☐ E - For Information	Discipline / GIS Review Status RA/GC ENGINEER Name: BLASIM KANANA Sign:  Date: 04-12-2023	Project Engineer Review & Approval Status Name:  Sign:  Date:																												
Comments: Contractor has been complied the requirements as per attachment.																														
<table style="width: 100%;"> <tr> <td style="width: 33%;"> Contractor Project Manager & Stamp Name:  Sign:  </td> <td style="width: 33%; text-align: center;"> LB Document Control Stamp  Municipality Projects Louis Berger </td> <td style="width: 33%;"> LB Project Director Name:  Sign:  Date: 06/11/2023 </td> </tr> </table>			Contractor Project Manager & Stamp Name:  Sign: 	LB Document Control Stamp  Municipality Projects Louis Berger	LB Project Director Name:  Sign:  Date: 06/11/2023																									
Contractor Project Manager & Stamp Name:  Sign: 	LB Document Control Stamp  Municipality Projects Louis Berger	LB Project Director Name:  Sign:  Date: 06/11/2023																												


Various Clients & Ministries Approvals



Document Management System



أمانة جدة



Zuhair Fayez Partnership
Consultants
Architecture, Engineering
and Information Systems
P.O. Box 5443, Jeddah 21422
Saudi Arabia
Telephone 01220000



رؤية
2030
Vision
2030

Document Submittal

Contractor: Omar Mutlaq Mahboub Al-Salami Contracting Est

Contract No.: 3/00/37/0006/001/16

Project Name: Maintenance and restoration of street sidewalks on the main axes north of Jeddah 17056

Location : North Jeddah

Project No.: R3-23005

Ref. No. : ZFP - R3-23005-rev-0009

Date : 21/12/2023

Please check appropriate box:

☐ As Built ☐ Bill of Materials ☐ Bank Warranty ☐ Certificate ☐ Drawing ☐ Engineering Calculation ☐ GIS or CAD	☐ Inspection Request ☐ Job Order ☐ Letter ☐ Material Sample ☐ Manual ☐ Pre-qualification ☐ Procedure or Methodology	☐ Product Data ☐ Report ☐ Request for Information ☐ Schedule ☐ Shop Drawing ☐ Test Reports ☐ Others (Job order completion)
--	--	---

Purpose:

☐ For Information
 ☒ For Review & Approval
 ☐ As Requested

Subject: Rawaei altashied for industry co. for concrete ready mix and cement products pre-qualification

Document Description:

SR. No.	Document No.	Document Name	Rev.	Hard Copy	Soft Copy
		Rawaei altashied for industry co. for concrete ready mix and cement products pre-qualification		✓	✓

ZFP Review & Approval Status:

☐ Approved (Work may proceed)
☒ Approved as Noted (Work may proceed subject to incorporation of Comments)
☐ Revise and Resubmit (Work may not proceed)

Test Required ☐
 Manufacturer Warranty Required ☐
 Sample Required ☐
 Mockup Required ☐

Comments: فوسى بتدريد الخرسانه من الهودد المذكور اغلاء على ان يتم تنفيذ الاعمال وفق شروط العقد ومتطلبات المشروع ويجب اخذ عينات اثناء التسليم واجراء اختبارات الجودة عليها و ارفاق النتائج و سند تسليم المواد مع الختم والمستخلص


Contractor Project Manager


Name: 


Sign: 

Date: 

Consultant Project Engineer

Name: 

Sign: 

Date: 


ZFP Projects Control Engineer

Name: Mohamed Elmor

Sign: 

Date: 24/12/2023







JM-

Page 1

Various Clients & Ministries Approvals

المقاول		الاستشاري		المالك	
 شركة أزهر AZHAR COMPANY		 شركة مدار الجزيرة الاستشارات الهندسية		 تسكين شركة تسكين وإسكان والتطوير العقاري	
طلب اعتماد مورد (VAR)					
المشروع:		المدينة:		مشروع سكن العمال أم حبلين	
خاص بالمقاول					
إعادة تقديم ☐		تقديم لأول مرة ☒			
رقم التقديم السابق: LH-UM-AZHR-VAR-037		رقم التقديم: 2024 05 13		تاريخ التقديم: 2024 05 13	
اسم المورد: شركة روافع التشييد للصناعة		رقم ووصف البنود بجداول الكميات مع صورة من البنود موضح عليها: خرسانة جاهزة			
مرفقات التقديم: بروفایل الشركة مطبوع + نسخة PDF		اسم المورد: شركة روافع التشييد للصناعة			
تعهد المقاول: نتعهد بصحة جميع ما ذكر أعلاه ونتحمل كامل المسؤولية في حال وجود خطأ.					
مدير المشروع		مهندس الجودة		المهندس المختص	
م/ شريف عرفة		لؤي أبو صافي		م/ عمر كشوة	
التوقيع		التوقيع		التوقيع	
ملاحظات الاستشاري:					
يتم فتح اعتماد الشركة لتوريد ومب الأمانة القاهرة على أن يتم تقديم كافة النماذج والطلبات التمهيدية. يتم تقديم موافقات فنية للبلوك إذا تم اختياره للتوريد مع عينة واقعية. المقاول (المستأجر)					
RECEIVED 13 MAY 2024 مشروع سكن العمال موقع أم حبلين AZ-JLH-UMH					
يعتمد حسب الملاحظات الموضحة (B) ☒		يعتمد كما تقدم (A) ☐		الإجراء:	
مرفوض (D) ☐		يحتاج إلى إعادة تقديم (C) ☐			
تعهد الاستشاري: لشهد بأن طلب التقديم المذكور أعلاه قد تمت مراجعته بالتفصيل وبندقة وتمت مطابقته مع شروط ومواصفات ومخططات العقد وهو مطابق.					
الختم الرسمي		اسم مدير المشروع: م/ محمود الغمري التاريخ: 13 مايو 2024 توقيع مدير المشروع: 			

Various Clients & Ministries Approvals

PROJECT : AL Khayala, Al Jeedah	OWNER : MINISTRY OF HOUSING 	SCAR No : 006 Revision : 00 DATE : 27-08-2024
DEVELOPER : 	CONSULTANT: 	CONTRACTOR: 

SUB CONTRACTOR APPROVAL REQUEST

Name of Sub-Contractor: RTCO, Rawaei Al-Tashied Company	
Package:	
Description: (RTCO, Ready Mix concrete product)	
Specifications Reference:	
Profile Reference: NHC-ATCC-GEN-00-CVL-PF-SCAR-001	
Attachments: Company profile ☒	Key Personnel ☐
Major Equipment ☐	Others ☐

Comments:

NHC-ATCC-GEN-00-CVL-PF-SCAR-001 (RTCO, Ready Mix concrete product)

Projects Manager : Eng. Jamil Wazzan

Prepared By : Eng. Mohammad Kara

Date: 27-08-2024


Time -02:00 pm

Consultant's Representative Comments:

لا مانع من الاعتماد بعد الاطلاع على بروفایل شركة روائع التشييد للصناعة للخرسانة الجاهزة مع الالتزام بالخططة التصميمية المعتمدة والشروط والمواصفات وتعليمات المهندس المشرف.	APPROVED
	✓ APPROVED AS NOTED
	REVISE AND RESUBMIT
	NOT APPROVED
Consultant's Representative: 	Date: 29/08/2024
Approval shall not relieve the Contractor of his liabilities under the Contract.	

Various Clients & Ministries Approvals





Contract No. :	Project No.: 19/004/101
Project Name: مشروع توسعة حديقة الأمير عبد الرحمن بن ناصر بالخرج	Ref. No. :
Location : Al Kharj	Date : 25/6/2019

Please check appropriate box:

☐ As Built	☐ Letter	☐ Request for Information (RFI)
☐ Bill of Quantities	☐ Material Sample	☐ Schedule
☐ Certificate	☐ Manual	☐ Shop Drawing
☐ Drawing	☐ Pre-qualification	☐ Test Reports
☐ Engineering Calculation	☐ Procedure/ Methodology	☐ Bank Warranty
☐ Inspection Request	☐ Product Data	☐ Others (please specify)
☐ Job Order	☐ Report	

Subject: APPROVAL OF CONCRETE MIX DESIGNS FOR PROJECTS CONCRETE WORK.

Document Description:

Sr. No.	Document Number	Document Name	Rev.	Hard Copy	Soft Copy
1		CONCRETE MIX DESIGNS (C-15, C-20, C-25, C-30, C-35)	00		
2		RAWAEE AL-TASHEED FOR INDUSTRY CO.			
3					
4					
5					

Review & Approval Status

☐ Approved As Submitted (work may proceed)	☐ Submittal Inconsistent with Contract
☐ Approved As Noted (work may proceed as noted)	☐ Unacceptable
☐ Re-submittal Required	☐ Rejected
☐ Submittal Incomplete	☐ Other Comments

Comments:
 * Approved * ✓

Contractor: <u>Rawaei AlTashied Co.</u> Sign: _____ Date: _____	Consultant: _____ Sign: _____ Date: _____
---	---

Mouchel Program Management Office
 Sign: _____
 Date: _____



Various Clients & Ministries Approvals



Document Submittal

Project Name:	north-east of Jeddah 16864	Project ID:	R4-22008
Contractor:	Ayash Marzouk Al-Harbi Co.	Contractor Ref #:	AMH-NEJ-SUB-076-rev 01
Contract No.:	4/00/05/0601/001/17	Date:	07-May-24
Location:	north-east of Jeddah		

Please check appropriate box:

☐ Letter	☐ Technical Report	☐ Drawings
☐ Technical Submittal	☐ GIS or CAD	☐ Shop Drawing
☐ Bill of Quantities	☐ Job Order	☐ Reports
☐ Procedure or Methodology	☐ Engineering Calculation	☐ Test Reports
☐ PM Plan	☐ Schedule	☐ Permissions
☐ Product Data	☐ As Built	☐ Request for Information
☒ Pre-qualification	☐ Certificates	☐ Manuals
☐ Material Sample	☐ Job Order Completion	☐ Others (please specify)

Purpose: ☐ For Information ☒ For Review & Approval ☐ As Requested

Subject: **Pre-qualification of RAWAEE ALTASHIED (CONCRETE SUPPLIER)**

Document Description:

SR. No.	Document No.	Job Order # / BoQ #	Document Name	Rev.	Hard Copy	Soft Copy
01	01		Document for RAWEE ALTASHIED	01	1	

TRACTEBEL Review & Approval Status

- ☐ A - Approved (Work may proceed)
☒ B - Approved as Noted (Work may proceed subject to Incorporation of Comments)
☐ C - Revise and Resubmit (Work may not proceed)
☐ D - Rejected ☐ E - For Information

Discipline / GIS Review Status

Name: **Iskander Elshorling**
 Sign:
 Date: **9/5/2024**

Project Engineer Review & Approval Status

Name: **Mohamed Foad**
 Sign:
 Date: **9/5/2024**

Comments:

- * Contractor to provide The missing / Expired documents Highlighted & attached checklist
- * Submit Separate document for Mix design Comply with Project requirements.
- * factory visit required to make Trial mix.

Contractor Project Manager & Stamp

Name: **elshorling**
 Sign:

 C.R. 4030129949
 JEDDAH

TRACTEBEL Document Control Stamp

07 MAY 2024
 Received by:
 المستلم

TRACTEBEL Project Director

Name: **Abdullah AlSabbah**
 Sign:
 Date: **9/5/2024**

Various Clients & Ministries Approvals

Supplier Submittal Form				
2024/05/30	التاريخ :	01	Rev No :	Submittal Reference :
اسم المشروع :				
المطور :				
الإستشاري :				
المقاول :				
رقم الطلب :				
رقم العملية :				
00:00:00 2024-05-16	أخير التاريخ الفعلي للعملية :	14:28:40 2024-06-02 / 11:35:39 2024-05-30	126110	
Attachments		Sub-Contractor/ Supplier Details		
☒	Chamber of Commerce Membership	تعريف : شركة روائع التشييد للصناعة		
		Trade : شركة روائع التشييد للصناعة		
☒	Municipality License	Location : الرياض		
☒	(Other Licenses (Specify	Experience : 5		
		Contact Mobile : 0544641348 / م/ معاذ غزال Contact Name		
☒	(Pre-Qualification Does (Specify	Is the company certified against any quality standard : ? تأكيد		
		Subcontractors/ Suppliers Proposed Scope of Work in this project		
☒	Completion Certificates for Previous Projects	خرسنة		
		الوحدة : الكل		
		موقع العمل : الكل		
الملاحظات :				
SSR Guidelines Notes				
التخصص				
Civil				
بيانات النموذج :				
Documents Notes :				
الممثل : رضا ربيع (748)				
المقاول				
الإستشاري				
التوقيع الإلكتروني				
رضا ربيع (748)				
أحمد إبراهيم (774)				
التوقيع الإلكتروني				
اسم				
التخصص				
التاريخ				
الحالة				
أحمد إبراهيم (774)				
مهندس مدني				
14-02-06 2024/06/02				
محمود أحمد (637)				
مدير مشروع				

Various Clients & Ministries Approvals



Pre-Qualification

Program Title	Jeddah Housing Project.	Date	MAY-12- 2024
Project Title	Nesaj Town Jeddah	Contract No.	

Developer	Retal Urban Development Co.
Project Management	Nesaj Urban Development
Supervision Consultant	Samaa Engineering Consultation
Main Contractor	Building Construction Co. Ltd. (BCC)

Submittal No.:	BCC-NTJ-PRQ-024	Revision:	00
Submittal Title:	Pre-Qualification		

We are sending herewith under separate cover the drawings / documents / samples listed below:

ITEM NO.	DWGS. SPECS BOQ REF.	DESCRIPTION	TYPE	COPIE	ACTION
1		Company Profile- RTCO Concrete. (Rawaei AlTashied for Industry Co.)			

TYPE: SD= Shop Drawings, SM= Sample, GT= Guarantee, MD= Manufacturer's Data, CT= Certificates, TT= Test Results, OT= Other,
MT= Material Data

Subcontractor/ Supplier/Manufacturer:

We certify that the documents / materials submitted herewith have been reviewed in detail and are in strict conformance with the contract drawings and specifications except as otherwise stated.

Contractor Name (BCC) Signature: Ahmed Rcv'd
Eng. Ahmed Date: 12/5/24

Consultant Review Comments:


AS Reviewed The Pre-qualification no problem To Approved just need to submit Mix design and Make Trial Mix		Approved ☒ Approved As Noted ☐ As Noted & Resubmit ☐ Not Required ☐ Not Approved
Consultant Project Engineer:	Signature:	Rcv'd
Consultant Project Manager:	Signature:	Date: 12/5/24
		Rcv'd
		Date: 12/5/24

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the requirements of The Contract. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all quantities and dimensions, selecting fabrication processes and techniques of construction, coordinating his work with that of other trades and performing his work in a safe and satisfactory manner.

Distribution: ☐ NESAJ ☐ Others ☐ Contractor



Various Clients & Ministries Approvals

KINGDOM OF SAUDI ARABIA MINISTRY OF MUNICIPAL AND RURAL AFFAIRS DILAM Municipality PROJECT MANAGEMENT		0204		 المملكة العربية السعودية وزارة الشؤون البلدية والقروية بلدية الدلم إدارة الإشراف والتفتيش	
SUBMITTAL NO. : (١٣)		ADDITIONAL COAST : YES / NO نعم / لا		تكاليف إضافية:	
اعمار العالمية للمقاولات Enmar International Contracting		 MATERIAL / EQUIPMENT SUBMITTAL مطلب إ�تماد مواد / معدات			
PROJECT NO. : ١٤٤٢/٤٤٤/٢٠٤ / ٦		PROJECT NAME : صيانة العبارات المائية			
TYPE (CHECK ONE) MATERIAL ☒ مواد EQUIPMENT ☐ أدوات ومعدات PROCEDURE ☐ إجراء مطلوب CALCULATION ☐ حسابات تقنية TEST & DATA ☐ نتائج اختبارات و معلومات OTHER ☐ أخرى		SUBMITTAL TITLE : اعتماد مورد خرسات وبلوك دفعات DESCRIPTION : طلب اعتماد تسريته روائع تنفيذ للصيانة كمورد للخرسانة الجاهزة والبلوك الخرساني لدى بلدية الدلم			
MANUFACTURER : شركة النشيد بيلدنج		MADE IN KSA YES / NO نعم / لا		صناعة معروفة:	
SUPPLIER / AGENT:		101101628 AUTHORIZED REPRESENTATIVE. CONTRACTOR توقيع المهندس كثرش من المطول		هذا المطلب خاضع لمطابقات و شروط العقد الإلزامي تؤخذ خلاف ذلك	
PM APPROVAL		Note: لا مانع من اعتماد شركة روائع التنفيذ مع التزام كافة فعايبس الجودة والمواصفات الفنية			
APPROVAL APPROVAL AS NOTED REVISE & RESUBMIT NOT APPROVED, RESUBMIT		REVIEW AND APPROVAL OF THIS SUBMITTAL DOES NOT RELIEVE THE CONTRACTOR HIS RESPONSILITIES UNDER THE TERMS OF THE CONTRACT			
 Q & C Engineer مهندس ضبط الجودة		 Project Engineer مهندس المشروع		 Project Technician / Surveyor مراقب فني / مباح المشروع	
		 Project Manager مدير إدارة الإشراف والتفتيش			
Receive Date &		Returned Date & Time :		إرجاع المطلب التاريخ و	

Various Clients & Ministries Approvals

   	
مطلب اعتماد مواد المشروع: تصميم وتنفيذ الخط الناقل لربط خطوط المياه النافقة من الخزائن الشمالي بمدينة جدة الاستشاري: شركة فيونشر كونسولت للاستشارات الهندسية المقاول: تدايس شركة لنما العالمية لتقنيات المياه والطاقة المحدودة وشركة كونا اند كومباني كونسولتشن السعودية للمقاولات	
ملاحظات ☐ إعادة تقديم ☒ تقديم لأول مرة	
تاريخ التقديم: 12-06-2024 رقم التقديم: P981-MAT-69	رقم وصف البنود وجدول الكميات مع صورة من البنود موضح عليها: 1-4-8 توريد وإنشاء غرفة من الخرسانة المسلحة لصمامات قفل فردية كما هو موضح بالمخططات والمواصفات والعمل يشمل الحفر والردم وأعمال الخرسانة المسلحة والعمادة والعمل وتوريد وتركيب العطاء والدرج وتجميع القطع الخاصة والمواسير اللازمة لشبك الصمام وإعادة ترميم الأسطح لما هو عليه وكل ما يلزم لإنهاء العمل وذلك على النحو التالي: 1-4-8-1, 1-4-8-2, 1-4-8-3, 1-4-8-4, 1-4-8-5 1-4-9 توريد وإنشاء غرفة من الخرسانة المسلحة لصمامات قفل مزدوجة وحسب ما جاء بالبيد (1-4-8-1) على النحو التالي: 1-4-9-1, 1-4-9-2, 1-4-9-3, 1-4-9-4 1-4-10 توريد وإنشاء غرفة من الخرسانة المسلحة لتزويد صمامات تنقيس الهواء وحسب ما جاء بالبيد (1-4-8-1) وذلك على النحو التالي: 1-4-10-1, 1-4-10-2, 1-4-10-3
اسم المورد: Rawaei AlTashied For Industry Company (RTCO) شركة رواعي للتشييد للصناعة	اسم المصنع: Rawaei AlTashied For Industry Company (RTCO) شركة رواعي للتشييد للصناعة
اسم المادة ومواصفاتها CONCRETE MIXED DESIGN 1- Concrete Class (C-25) 2- Concrete Class (C-30) 3- Concrete Class (C-35)	مواصفات العقد (ترفق صورة من المواصفات في العقد) Item no. 1-4-8
تمهد المقاول: نتعهد بصحة وكيفية ما ذكر أعلاه وتنحيل كامل المسؤولية في حال وجود خطأ.	
الختم الرسمي	اسم مدير المشروع: م. 29 التاريخ: 29/6/2024 توقيع مدير المشروع:
ملاحظات الاستشاري:	
العمل بالترتيب طبقاً للمواصفات الفنية للمشروع * درجاً من الحرارة لتدعيم عمق المنصوب عليه بالمواصفات	
يعتمد كما تقدم ☒ يعتمد حسب الملاحظات الموضحة ولا يحتاج إلى إعادة تقديم ☐ يعتمد حسب الملاحظات الموضحة ويحتاج إلى إعادة تقديم ☐ مرفوض ☐	
تمهد الاستشاري: نتعهد بأن طلب التقديم المذكور أعلاه قد تمت مراجعته بالتفصيل وبدقة وتمت مطابقتها مع شروط ومواصفات ومخططات العقد وهو مطابق.	
الختم الرسمي	اسم مدير المشروع: م. 29 التاريخ: 29/6/2024 توقيع مدير المشروع:

All dates to be entered in format: dd/mm/yyyy
 PMF-012-QUA-011_02 Material Approval

1 of 1

Various Clients & Ministries Approvals

PROJECT : MADD SADAYEM HOUSING JEDDAH	OWNER : MINISTRY OF HOUSING 	Doc Ref# TCC-MSD-HAT-DS-PD-0036 Revision : 00 DATE : 07 Oct 2024
DEVELOPER :  ثبات المسكن THABAT	CONSULTANT :  الحمية للهندسة HATMIA ENGINEERING	CONTRACTOR:  ثبات

DOCUMENT SUBMITTAL

Subject: Prequalification of Rawae Al Tashied for Concrete Mix Design	
Type of Document: ☐ MS: Method Statement ☐ CN: Calculation Notes ☐ SK: Sketch ☐ OM: Operation and Maintenance Manuals	 ☐ OT: Other Documents ☐ CD / DVD ☒ PD: Prequalification
Description of Document:	
Contractor's Representative:  	
Consultant's Representative Comments:	
لا حاجة لمزيد من المعلومات على أن يتم تنفيذ الأعمال وفق شروط العقد ومطابقاً لـ مشروع وقبأه عيانتنا أثناء التنفيذ وإجراء اختبارات الجودة على وإرفاق النتائج وسند تسليم المواد مع الإتمام	☐ APPROVED ☒ APPROVED AS NOTED ☐ REVISE AND RESUBMIT ☐ NOT APPROVED
Consultant's Representative: 	Date: 7/10/2024


Various Clients & Ministries Approvals

		Operation, Maintenance And Cleaning Of Al Aylen & Dabiyah Roads in Dilham			
MATERIAL SUBMITTAL FORM					
Site No.		Site Name:	Al-Houta Roads	Project No.	102
Bldg. No.		Bldg. Nam:		Location	Al-Houta
To:	Ministry Of Transport and Logistic Service			Submittal No:	
Attention:				Date & Time :	
From :	TAMDEEN WATANIA			Request Return Date :	2022-2019
MATERIALS DETAILS					
Material Description:	Concrete Mix Designs (C-15 , C-20 , C-25 , C-30 , C-35)				
Standard / Specifications	ACI , MUNICIPALITY RIYADH KSA				
Supplier/Manufacturer:	RAWAEE ALTASHEED COMPANY				
Contact Person:					
Address Details:	Al-Kharj Haradh Road				
Local Agent:					
Contact Person:		Tel :		Mob: +966 593788821	
Address Details:					
Availability		Local		Imported	
Status		Specified		Alternative	
ENCLOSURES					
☒ Catalogue		☐ Sample		☐ List of Suppliers	
☐ Technical Data Sheet		☐ Comparison Sheet		☐ Other	
Contractor's Note :					
Submitted for: ☒ Approval ☐ Information ☐ Coordination					
Contractor: (By completing the form the Contractor certifies that the document complies with contract specifications).					
Signature:	Date:	Signature:	Date:		
Material Eng.:		Contractor's Representative:			
Engineer : (For Engineer's use only)					
Received by:	Received Date:	Received Time:			
Engineer Comments:					
* Attached designs compliance with specifications Follow Project specifications during implementation -					
This approval does not relieve the contractor of his responsibility as per the contract.					
Engineer Signature:	Title:	Date:			
Result:					
☐ A- Approved	☒ B- Approved as Noted	☐ C- Revise & Resubmit	☐ D- Rejected		
☐ I- For Information	☐ N- No Action	☐ T- Terminated	☐ N- Not Applicable		
Distribution Copy	☐ MOI	☐ MEY	☐ CONTRACTOR	☐ S/C	

Various Clients & Ministries Approvals

KINGDOM OF SAUDI ARABIA MINISTRY OF MUNICIPAL AND RURAL AFFAIRS DILAM Municipality PROJECT MANAGEMENT		المملكة العربية السعودية وزارة الشؤون البلدية والقروية بلدية الدلم إدارة الإشراف والتفتيش	
SUBMITTAL NO.: ٥٠ رقم الطلب		ADDITIONAL COAST: YES / NO نعم / لا	
اعداد العالمية للمقاولات Enasar International Contracting		MATERIAL / EQUIPMENT SUBMITTAL طلب اعتماد مواد / معدات	
PROJECT NO.:		PROJECT NAME: صيانة مياه الري في الدلم	
TYPE (CHECK ONE) نوع الإخطار المرفوع والطلب		SUBMITTAL TITLE نوع الإخطار: اعتماد مواد ومعدات لخدمة مشروع لدى بلدية الدلم	
MATERIAL ☒ مواد		DESCRIPTION: طلب اعتماد شركة روائع الهندسة للمصاحبة كمورد للأغراض العامة والبلدية لخدمة لدى بلدية الدلم	
EQUIPMENT ☐ أدوات ومعدات			
PROCEDURE ☐ إجراءات مطروحة			
CALCULATION ☐ حسابات فنية			
TEST & DATA ☐ نتائج اختبارات ومعلومات			
OTHER ☐ أخرى			
MANUFACTURER: المورد / المصنع: شركة روائع الهندسة للمصاحبة		MADE IN KSA: YES / NO نعم / لا	
SUPPLIER / AGENT:		AUTHORIZED REPRESENTATIVE CONTRACTOR:	
THIS SUBMITTAL HAS BEEN REVIEWED IN DETAIL AND IS IN STRICT CONFORMANCE WITH CONTRACT REQUIREMENTS EXCEPT AS OTHERWISE NOTED.		هذا الطلب خاضع لملاحظات وشروط العقد الإلزامي لوحظ خلاف ذلك	
PM APPROVAL APPROVAL ☒ A APPROVAL AS NOTED ☐ B REVISE & RESUBMIT ☐ C NOT APPROVED, RESUBMIT ☐ D		للملاحظات: لا حاجة من اعتماد شركة روائع الهندسة مع الالتزام بكافة معايير الجودة والمواصفات الفنية	
REVIEW AND APPROVAL OF THIS SUBMITTAL DOES NOT RELIEVE THE CONTRACTOR HIS RESPONSIBILITIES UNDER THE TERMS OF THE CONTRACT			
Q & C Engineer مهندس ضبط الجودة		Project Engineer مهندس المشروع	
Project Manager مدير إدارة الإشراف والتفتيش		Project Engineer / Surveyor مهندس / مباحث المشروع	
Receive Date &		Return Date & Time	

Various Clients & Ministries Approvals

KINGDOM OF SAUDI ARABIA MINISTRY OF MUNICIPAL AND RURAL AFFAIRS DILAM Municipality PROJECT MANAGEMENT				المملكة العربية السعودية وزارة الشؤون البلدية والقروية بلدية الدلم إدارة الإشراف والتفتيش	
SUBMITTAL NO. : ١٤١ رقم الطلب		ADDITIONAL COAST : YES / NO نعم / لا		تكليف إضافي:	
إعمار العالمية للمقاولات Easir International Contracting				MATERIAL / EQUIPMENT SUBMITTAL طلب إعتقاد مواد / معدات	
PROJECT NO. : ١٤٤٢/٤٤٤١/٢٠٤١٧ رقم المشروع		PROJECT NAME : صيانة الجدران والممرات في بلدية الدلم			
TYPE (CHECK ONE) نوع الاعتقاد (تحقق واحد فقط)		SUBMITTAL TITLE : اعتماد مواد ومعدات للمشاريع في بلدية الدلم			
MATERIAL ☒ مواد		DESCRIPTION : طلب اعتماد شركة رواع التشييد للصناعة كمورد للمشاريع الاعمارية والبلدية في بلدية الدلم			
EQUIPMENT ☐ أدوات ومعدات					
PROCEDURE ☐ إجراءات مطلوبة					
CALCULATION ☐ حسابات فنية					
TEST & DATA ☐ نتائج التحليلات ومعلومات					
OTHER ☐ أخرى					
MANUFACTURER : شركة رواع التشييد للصناعة		المصنع المورد / الوكيل		MADE IN KSA : YES / NO نعم / لا	
SUPPLIER / AGENT :				صناعة سعودية	
THIS SUBMITTAL HAS BEEN REVIEWED IN DETAIL AND IS IN STRICT CONFORMANCE WITH CONTRACT REQUIREMENTS EXPECT AS OTHERWISE NOTED				هذا الطلب خاضع لمقتضيات وشروط العقد الإجمالي ولا خلاف ذلك	
PM APPROVAL					
APPROVAL ☒ A		الموافق			
APPROVAL AS NOTED ☐ B		يتمتع بدلائل			
REVISE & RESUBMIT ☐ C		يعدل و يعاد الطلب			
NOT APPROVED, RESUBMIT ☐ D		غير معتمد و يعاد الطلب			
REVIEW AND APPROVAL OF THIS SUBMITTAL DOES NOT RELIEVE THE CONTRACTOR HIS RESPONSIBILITIES UNDER THE TERMS OF THE CONTRACT		مراجعة الطلب واعتماد لا يعفي المقاول من الوفاء بالالتزامات التعاقدية تجاه المالك والمقاولين عن المشروع			
 Q & C Engineer مهندس ضبط الجودة		 Project Engineer مهندس المشروع		 Project Technician / Surveyor مراقب فني / مساح المشروع	
		 Project Manager مدير إدارة الإشراف والتفتيش			
Receive Date & _____		Return Date & Time : _____		إرجاع الطلب التاريخ و _____	

Various Clients & Ministries Approvals



Document Submittal Form

Contractor : NAJD PACK		Project No.:	
Contract No.:		Ref. No. :	
Project Name: NAGD PACK COMPLEX		Date : 2022	
Location :			

Please check appropriate box:

☐ As Built	☐ Letter	☐ Request for Information (RFI)
☐ Bill of Quantities	☐ Material Sample	☐ Schedule
☐ Certificate	☐ Manual	☐ Shop Drawing
☐ Drawing	☐ Pre-qualification	☐ Test Reports
☐ Engineering Calculation	☐ Procedure/ Methodology	☐ Bank Warranty
☐ Inspection Request	☐ Product Data	☐ Others (please specify)
☐ Job Order	☐ Report	

Subject:

Document Description:

Sr. No.	Document Number	Document Name	Rev.	Hard Copy	Soft Copy
1		RAWAEE AL-TASHEED COMPANY	00		
2		Concrete Mix (C-30 , C-35 , C-40 , C-45)			
3		Conforming to Specifications (ASTM,ACI,MUNICIPALITY RIYADH)			
4					
5					

Review & Approval Status

☐ Approved As Submitted (work may proceed)	☐ Submittal Inconsistent with Contract
☐ Approved As Noted (work may proceed as noted)	☐ Unacceptable
☐ Re-submittal Required	☐ Rejected
☐ Submittal Incomplete	☐ Other Comments

Comments: Above Designs reviewed and found ok. follow project specifications During implementation of work

Contractor: Sign: Date: 6/7/2022	Consultant: شركة الشروات الخاصة للتاسيس Sign: Date: 6/7/2022	Mouchel Program Management Office: Sign: Date:
--	--	--

DAR/1011MF/CM/3/DO/004 : REV. 01 Page 1 of 1

Various Clients & Ministries Approvals

	Document Title: DOCUMENT SUBMISSION FORM		
	Project Name: AL-DANA 17	Project Contractor: AI-ASAS AL-AMIK	
	Project Number:	Project Consultant: ADWA AL-TAISIR	
	Project Program Manager:	Document Reference No.:	

DOCUMENT ISSUED BY				DOCUMENT RECEIVED BY			
Issued By:	ADWA AL-TAISIR			Received By:	AI-ASAS AL-AMIK		
Position / Company:				Position / Company:			
Signature:				Signature:			
Date:	3 March 2018	Time:		Date:	5 March 2018	Time:	

DOCUMENT SUBMISSION TYPE (Tick relevant Box)					
☐	As Built	☐	Material Sample	☐	Bill of Quantities
☐	Certificate	☐	Manual	☐	Schedule
☐	Drawing	☐	Pre-qualification	☐	Shop Drawing
☐	Engineering Calculation	☐	Procedure/Methodology	☐	Bank Warranty
☐	Job Order	☐	Product Data	☐	Letter
☐	Report	☐	Test Report	☐	Other:

PURPOSE FOR DOCUMENT SUBMISSION				DATE RESPONSE REQUIRED BY	
FOR INFORMATION	☐	FOR REVIEW & APPROVAL	☒	AS REQUESTED	☐
OTHER (As Noted)				☐	Indicate Date: _____

SUBMITTED DOCUMENTS REFERENCE NUMBERS					
#	Document Reference No.	Document Description	Rev.	Hard Copy	Soft Copy
1		CONCRETE MIX DESIGNS (C-20, C-25, C-30, C-35, C-40)			
2		RAWAEE AL-TASHEED FOR INDUSTRY CO.			
3					
4					
5					
6					

To continue List - enter "Submittal Construction Form" (MOD-COC-16.0-002)

CONSULTANT RESPONSE STATUS		
APPROVED AS SUBMITTED (APP)	☐	APPROVED AS NOTED (APN)
		☒
REJECTED / RE-SUBMIT (RRS)	☐	

COMMENTS
Below cited Design witnessed & found compliance with Project specifications. Contractor to follow Project requirements.

RESPONSE ISSUED BY		RESPONSE RECEIVED BY	
Issued By:		Received By:	

Various Clients & Ministries Approvals

	Document Title: DOCUMENT SUBMISSION FORM		
	Project Name: AL-WEROD 19	Project Contractor: AL-ASAS AL-AMIK	
	Project Number:	Project Consultant: ADWA AL-TAISIR	
	Project Program Manager:	Document Reference No.:	

DOCUMENT ISSUED BY				DOCUMENT RECEIVED BY			
Issued By:	ADWA AL-TAISIR			Received By:	AL-ASAS AL-AMIK		
Position / Company:				Position / Company:			
Signature:				Signature:			
Date:	3 March 2018	Time:		Date:	5 March 2018	Time:	

DOCUMENT SUBMISSION TYPE (Tick relevant Box)			
☐ As Built	☐ Material Sample	☐ Bill of Quantities	
☐ Certificate	☐ Manual	☐ Schedule	
☐ Drawing	☐ Pre-qualification	☐ Shop Drawing	
☐ Engineering Calculation	☐ Procedure/Methodology	☐ Bank Warranty	
☐ Job Order	☐ Product Data	☐ Letter	
☐ Report	☐ Test Report	☐ Other:	

PURPOSE FOR DOCUMENT SUBMISSION				DATE RESPONSE REQUIRED BY	
FOR INFORMATION	☐	FOR REVIEW & APPROVAL	☒	AS REQUESTED	☐
				OTHER (As Noted)	☐
				Indicate Date	

SUBMITTED DOCUMENTS REFERENCE NUMBERS					
#	Document Reference No.	Document Description	Rev.	Hard Copy	Soft Copy
1		CONCRETE MIX DESIGNS (C-20, C-25, C-30, C-35, C-40)			
2		RAWAEI AL-TASHEED FOR INDUSTRY CO.			
3					
4					
5					
6					

To continue List - use "Submitter Continuation Form" (MOD-DCC-10-0-002)

CONSULTANT RESPONSE STATUS		
APPROVED AS SUBMITTED (APP)	☐	APPROVED AS NOTED (APN)
		☒
REJECTED / RE-SUBMIT (RRS)	☐	

COMMENTS	<i>Subject Designs compliance with Project specification - Follow specification during implementation</i>
----------	--

RESPONSE ISSUED BY		RESPONSE RECEIVED BY	
Issued By:		Received By:	

Various Clients & Ministries Approvals



شهادة انجاز وشكر وتقدير

الى من يهيمه الامر ،

تشهد مؤسسة العقائيد لخدمات المقاولات بأن شركة روائع التشييد للخرسانه الجاهزه قد اتمت الاعمال الموكله اليها بتوريد الخرسانات لكامل المواقع المنفذه من قبلنا على اتم وجه وافضل جوده من حيث المواصفات ، ودقة الوقت ، والتنسيق مع فريق العمل وحسن تعامل متمنين لهم التقدم والابداع.

وقد اعد هذا الخطاب دون ادنى مسؤوليه على مؤسسة العقائيد لخدمات المقاولات

شاكرين لكم حسن تعاونكم وتعاملكم.



✉ Bshoeth1980@outlook.sa
☎ +966 596011141
📍 Saudi Arabia, Jeddah City



Various Clients & Ministries Approvals



فصول السنة للمقاولات FOUR SEASONS CONTRACTING

Contracting - Electromechanics مقاولات - أعمال كهربوميكانيكية

شهادة إنجاز

إلى من يهمه الأمر :

تشهد شركة فصول السنة للمقاولات العامة بأن شركة روائع التشييد قد أتمت الأعمال الموكدة إليها (كمورد للخرسانة الجاهزة لكامل مواقع إنشاء البنك الأهلي فرع جدة) . على أتم وجه وأفضل جودة من حيث المواصفات والوقت والتنسيق مع فريق العمل متمنين لهم استمرار التقدم .

وقد أعد هذا الخطاب لهم دون أدنى مسؤوليه على شركة فصول السنة للمقاولات.....

شاكرين لكم حسن تعاونكم

المدير التنفيذي

م . أحمد سمير القرشاي




س.ت ٢٠٥٠٣٩٦١ - ص.ب ٩٢٠١ الدمام ٣١٤١٣ - المملكة العربية السعودية - تليفون : ٨٠٥٧٢٥٩ / ٠١٣٨٠٥٠٩١٢ - فاكس ٠١٣٨٠٦١٠٢٦
C.R. 2050039610 - P.O. Box 9201 - Dammam 31413 - Kingdom of Saudi Arabia - Tel : 0138050912 / Fax 0138061026

Various Clients & Ministries Approvals



AL RAHWAN
مؤسسة الرهوان للمقاولات
Al-Rahwan for Contracting Est.

C.R. : 4030156161 ✉ info@rahwan.sa

☎ +96626803225 🌐 www.rahwan.sa

شهادة انجاز

الى من يهمله الامر،

تشهد مؤسسه الرهوان للمقاولات بان شركه روائع التشييد للخرسانة الجاهزة قد اتمت الاعمال الموكلة اليها بتوريد الخرسانات لكامل الموقع (انشاء مبنى سكني) على اتم وجه وأفضل جوده من حيث المواصفات، الوقت، والتنسيق مع فريق العمل متمنيين لهم كافة التقدم والابداع.

وقد اعد هذا الخطاب دون أدني مسؤوليه على مؤسسه الرهوان للمقاولات ...

شاكرين لكم حسن تعاونكم



Various Clients & Ministries Approvals



المشروع : اتفاقية الخدمات الهندسية والاستشارية لتقديم خدمات الاشراف على تنفيذ مشاريع المياه والصرف الصحي بالقطاع الغربي

التاريخ: ٢٠٢٣/١٢/٢٤ م

الموضوع : اعتماد شريط التحذير لمشروع استبدال شبكات المياه وملحقاتها للجزء المتضرر من حي الفلاح تعميذ رقم ٤٠١٢٣٠٢٥٣

الموافق: ١٤٤٥/٠٦/١١ هـ

الرقم : (BK10230263-2024-517)

للمعتمد

صورة / مساعدة مدير المشروع بشركة المياه الوطنية

السادة مؤسسة ركن الجناد للمقاولات للمعتمدين

،،، السلام عليكم ورحمة الله وبركاته،،،

بالإشارة الى مشروع استبدال شبكات المياه وملحقاتها للجزء المتضرر من حي الفلاح تعميذ رقم ٤٠١٢٣٠٢٥٣ ومقاولتكم والى خطابكم رقم (RJ/JED/401230253/23/005) الوارد الينا بتاريخ ٢٠٢٣/١٢/٢٠ بخصوص طلب اعتماد شركة روائع التشييد للصناعة (رنكو) للخرسانة الجاهزة لتوريد الخرسانة الجاهزة للمشروع عاليه وبعد المراجعة فانه لانا من الاعتماد طبقا للشروط والمواصفات الخاصة بشركة المياه الوطنية مع ضرورة عمل خلطات تجريبية لاعتماد الخلطة التي تحقق المواصفات المطلوبة.

،،، ولكم جزيل الشكر،،،

مدير المشروع المكلف

م. ايهاب النسي

لرخص رقم ١٨ - الرخص ١١٤٦ - ص ب ١٧٣١ - هاتف ١٤ ٥٣ ٨١٥٥ - فاكس ١٤ ٥٣ ٨١٥٥ - ٩٦٦ ١٤ ٥٣ ٨١٥٥
License No 28 - Riyadh 11464 - P.O.BOX 16331 - Fax +966 14 53 8055 - Tel +966 14 53 8155
شركة مختصة بمعدن البازلت وشركته مهتمه بصي امتدادات وبن بيت الخبرة للاستشارات

Various Clients & Ministries Approvals

المقاول: شركة الجزيرة 	المستشار: شركة الاتحاد الهندسي (اختيار رقم 1) 	المستشار: شركة دار الهندسة للتصميم والاستشارات الفنية (شستر وشركاه) 	المقاول: شركة الوطنية للاستشارات 														
رقم المشروع: _____ اسم المشروع: المركز التجاري - مرفع أهر - مدينة جدة																	
الموقع: جدة																	
طلب اعتماد مواد																	
24002388-NOI-IACC-MAT-SC-SSC-00016-01 3/10/2025	رقم التقديم السابق: _____ تاريخ التقديم السابق: _____	24002388-NOI-IACC-MAT-SC-SSC-00016-02 25/3/2025	رقم التقديم: _____ تاريخ التقديم: _____														
☐ تقديم جديد ☒ إعادة تقديم																	
☐ معلومات ☐ ملاحظات ☐ اعتماد مصنع ☐ اعتماد مادة																	
☐ مدني ☐ معماري ☐ صناعي ☐ ميكانيكي ☐ كهربائي ☐ مياه																	
☐ مرفقات ☐ المخطط التعديلي ☐ رقم المخطط ☐ ملاحظات الاختبار ☐ مهاددة المسح للنتج ☐ مخطوطة مدعجة ☐ استندات الشركة ☐ كاتالوج فني ☐ DATA SHEETS																	
<table border="1"> <thead> <tr> <th>م</th> <th>رقم البند في جدول الكميات</th> <th>المسما</th> <th>وصف المادة</th> <th>المصدر</th> <th>المصنع / المورد</th> <th>المصدر</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>DIV 03</td> <td>(MAIN BUILDING & DRIVE THRU & HOLDING TANK & WATER TANK)</td> <td>CONCRETE MIX DESIGN 35 MPA</td> <td>محل</td> <td>شركة روافع التشييد للصناعة RTKO</td> <td>محل</td> </tr> </tbody> </table>				م	رقم البند في جدول الكميات	المسما	وصف المادة	المصدر	المصنع / المورد	المصدر	1	DIV 03	(MAIN BUILDING & DRIVE THRU & HOLDING TANK & WATER TANK)	CONCRETE MIX DESIGN 35 MPA	محل	شركة روافع التشييد للصناعة RTKO	محل
م	رقم البند في جدول الكميات	المسما	وصف المادة	المصدر	المصنع / المورد	المصدر											
1	DIV 03	(MAIN BUILDING & DRIVE THRU & HOLDING TANK & WATER TANK)	CONCRETE MIX DESIGN 35 MPA	محل	شركة روافع التشييد للصناعة RTKO	محل											
ملاحظات المقاول																	
مدير المشروع / المفاضل: _____ الاسم: _____ التوقيع: _____ رقم الترخيص: _____ رقم الترخيص: _____																	
المهندس المختص: _____ الاسم: _____ التوقيع: _____ مدير المشروع: _____ الاسم: _____ التوقيع: _____																	
مهندس المشروع: _____ الاسم: _____ التوقيع: _____ مدير المشروع: _____ الاسم: _____ التوقيع: _____ رئيس لجنة اعتماد المواد: _____ الاسم: _____ التوقيع: _____																	
حالة الاعتماد: ☒ اعتماد ☐ استكمال بيانات ☐ رفض																	
تاريخ: _____ الموقع: _____																	



Various Clients & Ministries Approvals

المقاول: شركة الجزيرة 	استشاري الإنشاءات: شركة الاتحاد الهندسي (خطيب وعلمي) 	استشاري الإدارة: شركة دار الهندسة للتصميم والاستشارات الفنية (شاعر ومشاروه) 	المالك: الشركة الوطنية للإنشاءات 
الموقع: جدة		رقم المشروع: المركز التجاري - موقع البحر - مدينة جدة	
طلب اعتماد مواد			
رقم التقديم السابق: 15	رقم التقديم: 5/2/2025	تاريخ التقديم السابق:	
الغرض من التقديم: ☐ معلومات ☐ ملاحظات ☐ اعتماد مادة		مجال الاعتماد: ☐ مدني ☐ معماري ☐ صحي	
مرفقات: ☐ مخطط التعاقب ☐ (رقم المخطط) ☐ شهادة الاختبار		مرفقات: ☐ مخطط التعاقب ☐ (رقم المخطط) ☐ شهادة الاختبار	
ملاحظات المقاول:		ملاحظات المقاول:	
المصدر:	المورد / المصنع:	المصدر:	المورد / المصنع:
محلي	شركة روافع التشييد للصناعة RTCO	محلي	شركة روافع التشييد للصناعة RTCO
المادة: PLAIN CONCRETE UNDER FOUNDATION		المادة: PLAIN CONCRETE UNDER FOUNDATION	
وصف المادة: CONCRETE MIX DESIGN 20 MPA		وصف المادة: CONCRETE MIX DESIGN 20 MPA	
رقم البند في جدول الكميات: DIV 03		رقم البند في جدول الكميات: DIV 03	
ملاحظات المقاول:		ملاحظات المقاول:	
توصيات الاستشاري:		توصيات الاستشاري:	
مهندس المختص:		مهندس المختص:	
الإسم: / م		الإسم: / م	
التوقيع:		التوقيع:	
مدير المشروع:		مدير المشروع:	
الإسم: / م		الإسم: / م	
التوقيع:		التوقيع:	
رئيس لجنة اعتماد المواد:		رئيس لجنة اعتماد المواد:	
الإسم: / م		الإسم: / م	
التوقيع:		التوقيع:	
حالة الاعتماد: ☐ رفض ☐ استكمال بيانات ☐ اعتماد ☒		حالة الاعتماد: ☐ رفض ☐ استكمال بيانات ☐ اعتماد ☒	
صادر:	التوقيع:	وارد:	التوقيع:
التاريخ:	التاريخ:	التاريخ:	التاريخ:

Company Legal Documents

Commercial Registration Certificate

Rawai AlTashyeed For Manufacturing Company

- National Number : 7035252605
- Release date : 07/05/2023
- Entity Type : Limited liability company
- Company Characteristics : (One person)
- Status : Active

Basic data of the commercial register



1900
mc.gov.sa

© X f v
mcgovsa

Company Legal Documents

سهاده إسبراك

Membership

This is to certify that أن نشهد بأن

شركة روائع التشييد للصناعة

Rawai AlTashyeed Company For Manufacturing

عضو في الغرفة التجارية

Certificate Date	29/06/2026 - 14/01/1448	تاريخ طباعة الشهادة
Date of Membership	07/04/2026 - 19/10/1447	تاريخ الاشتراك
Date of Expiry	26/04/2027 - 19/11/1448	تاريخ الانتهاء
Subscription Status	فعال	حالة الاشتراك
NUN	7035252605	رقم المنشأة الموحدة
Membership No	492937	رقم الإشتراك
Membership Degree	الثانية	درجة الإشتراك
Commercial Record/ License	4041100201	الرخصة / السجل التجاري
P. O. Box	7000	صندوق البريد

التوقيع

محمد أحمد العطاس

مدير إدارة شؤون المشتركين



Company Legal Documents

2282191762

TIN

٣١٠٩٣٩٥٥

الرقم المميز

Certificate No.

٢٢٨٣١٩١٦٢

رقم الشهادة

Issue Date

١٤٤٥/١٠/٠٩ هـ

تاريخ الاصدار

هيئة الزكاة والضريبة والجمارك

Zakat, Tax and Customs Authority

المملكة العربية السعودية

Kingdom of Saudi Arabia

شهادة

Certificate

The Zakat, Tax and Customs Authority certifies that the Taxpayer

تشهد هيئة الزكاة والضريبة والجمارك أن المكلف /

شركة رواع التشييد للصناعة شركة شخص واحد

Entity Unified No. / ID No.

٧٠٠٤٢٢٠٢٩٤

الرقم الموحد للمنشأة / رقم هوية

Commercial Registration/License / Contract No

١٠١١٠١٤٨١

سجل تجاري / رخصة / عقد رقم

Has submitted his tax return for the period ending on 31/12/2023 AD, and he was granted the certificate to complete all his transactions including the payment of the final amount due on the contract.

قدّم إقراره عن الفترة المنتهية في ٣١/١٢/١٤٤٥ هـ، وقد منح هذه الشهادة لإنهاء جميع معاملاته بما في ذلك صرف مستحقاته النهائية عن العقود.

The Certificate is valid until 02/11/1446 AH corresponding to 30/04/2025 AD

يسري مفعول هذه الشهادة حتى تاريخ ١٤٤٦/١١/٠٢ هـ الموافق ٢٠٢٥/٠٤/٣٠ م

(The second of Dhu al-Qi'dah one thousand four hundred forty-six Hijri)

(الثاني من ذو القعدة ألف و أربعمئة و ستة و أربعون هجري)

لا يعتد بهذه الشهادة إلا بعد التحقق من موقع الهيئة الإلكتروني: www.zatca.gov.sa

This certificate is not valid until verified by the Authority's Website: www.zatca.gov.sa

zatca.gov.sa 19993 @zatca_sa

هذه الوثيقة مستخرجة من النظام الآلي ولا تحتاج إلى توقيع ولا يعتد بهذه الشهادة إلا بعد التحقق من موقع الهيئة www.zatca.gov.sa

CERTIFIED
ISO
9001:2015
COMPANY

SASO
SAUDI ARABIA
QUALITY MARK

Company Legal Documents

أمانة
جدةخدمات
بلدي
balady
servicesرخصة نشاط تجاري
Commercial Activity Licence
شركة رواع التشييد للصناعة شركة شخص واحد

License Expiry Date تاريخ نهاية الترخيص 1449/01/11 License Number رقم الرخصة الموحد 451015397321

Owner's Name اسم المالك شركة رواع التشييد للصناعة

Owner's ID رقم هوية المالك 7035252605

ISIC Classification التصنيف الصناعي القياسي الدولي (نشاط إيزك) صناعة الخلطات الخرسانية الجاهزة والجافة متعددة الاستخدامات

Detailed Activity النشاط التفصيلي مصنع صناعة الخلطات الخرسانية الجاهزة والجافة متعددة الاستخدامات

Sub-Municipality البلدية أمانة محافظة جدة Municipality

Street الشارع شارع District الحي خارج حدود الدحياء

Sign's Area مساحة اللوحة 4 Sign's Type نوع اللوحة إرشادية Shop's Total Area مساحة المحل الإجمالية 20200 متر مربع



موقع المحل

تلاخلاق على الأنشطة الإضافية وتفاصيل الرخصة يرجى مسح رمز الاستجابة السريعة Code QR

Permit Expiry Date تاريخ انتهاء التصريح Permit Number رقم التصريح Permits التصاريح

مركز العناية بالعملاء
199040

Balady_cs



saudimomra



www.balady.gov.sa

Company Legal Documents





رخصة نشاط تجاري
Commercial Activity Licence
مصنع روائع التشييد للبلك

License Expiry Date	تاريخ نهاية الترخيص	License Number	رقم الرخصة الموحد
1447/05/15		42054996193	
Owner's Name	اسم المالك	شركة روائع التشييد للصناعة شركة شخص واحد	
Owner's ID	رقم هوية المالك	7004220294 - 7004220294	
ISIC Classification	التصنيف الصناعي القياسي الدولي (نشاط إيزت)	إنتاج خرسانة جاهزة الخلط	
Detailed Activity	النشاط التفصيلي	مصنع إنتاج خرسانة جاهزة الخلط	
Sub-Municipality	البلدية	Municipality	الذهانة
بلدية الخرج		أمانة منطقة الرياض	
Street	الشارع	District	الحي
طريق حرض		خارج حدود الاحياء	
Shop's Sign's Area	مساحة اللوحات الإعلانية	Shop's Total Area	مساحة المحل الإجمالية
0 متر مربع إرشادي 18 متر مربع اعلاني		24000 متر مربع	
			
للاطلاع على الأنشطة الإضافية وتفاصيل الرخصة يرجى مسح رمز الاستجابة السريع Code QR			
Permit Expiry Date	تاريخ انتهاء التصريح	Permit Number	رقم التصريح
التصاريح			

مركز الدعم الفني

199040

Balady_cs

saudimomra

www.balady.gov.sa

Company Legal Documents



سلامة

Salamah

أعمال
Business

ترخيص الدفاع المدني

شركة روائع التشييد للصناعة شركة شخص واحد

تاريخ الانتهاء
١٤٤٩-٠١-١١تاريخ الإصدار
١٤٤٧-٠٢-١٣رقم الترخيص
٣٠٠١٤٥١٩٥٢-٤٧

بيانات المنشأة

التصنيف الرئيسي للمنشأة (نشاط الأبرك)

٢٣٩٥٣٤ - صناعة الخلطات الخرسانية الجاهزة والجافة متعددة الاستخدامات

نوع المنشأة	اسم النشاط التجاري	المساحة الإجمالية	عدد الأدوار
شركة روائع التشييد للصناعة شركة شخص واحد		٢٠٢٠٠	١

بيانات المستأجر / المالك

اسم المستأجر / المالك	رقم المنشأة	رقم السجل التجاري
شركة روائع التشييد للصناعة شركة شخص واحد	٧٠٣٥٢٥٢٦٠٠	

بيانات العنوان

المنطقة	المدينة / المحافظة	الحي	الشارع
منطقة مكة المكرمة	جدة	خارج حدود الأحياء	شارع

بيانات الدفاع المدني

جهة إصدار الترخيص
مركز السلامة الميدانية بالحمدانية



موقع المحل

للإطلاع على الأنشطة الإضافية وتفاصيل الترخيص يرجى مسح رمز الاستجابة السريع QR Code أعلى الصفحة

هذه الوثيقة موقع ومصدقة إلكترونياً ولا تحتاج توقيع يدوي وفقاً لقرار مجلس الوزراء رقم (٨) وتاريخ ١٤٢٨/٠٣/٠٧ هـ المنظم للتعاملات الإلكترونية. وللتأكد من صحة الرخصة يرجى زيارة موقع المديرية العامة للدفاع المدني على الرابط التالي (www.998.gov.sa) وإدخال رقم الرخصة المذكور أعلاه - الإدارة العامة لتقنية المعلومات



920000356

@saudidcd



www.salamah.998.gov.sa

Company Legal Documents



سلامة
Salamah



ترخيص الدفاع المدني

شركة روائع التشييد للصناعة شركة شخص واحد

تاريخ الانتهاء
١٤٥١-٠٤-١٤



تاريخ الإصدار
١٤٤٦-٠٤-١٤



رقم الترخيص
٤-٠٠٠٠٦٥٢٦٠٠-٤٦



بيانات المنشأة

التصنيف الرئيسي للمنشأة (نشاط الايزك)

٢٣٩٥٣١ - إنتاج خرسانة جاهزة الخلط

نوع المنشأة	اسم النشاط التجاري	المساحة الاجمالية	عدد الادوار
مصنع	شركة روائع التشييد للصناعة	٢٤٠٠٠٠	١

بيانات المستأجر / المالك

اسم المستأجر / المالك	رقم المنشأة	رقم السجل التجاري
شركة روائع التشييد للصناعة شركة شخص واحد	٧٠٠٤٢٢٠٢٩٤	١٠١١٠١٤٢٨١

بيانات العنوان

المنطقة	المدينة / المحافظة	الحي	الشارع
منطقة الرياض	الخرج	خارج حدود الالباء	طريق حرض

بيانات الدفاع المدني

جهة اصدار الترخيص

مركز السلامة الميداني



موقع المحل

للاطلاع على الانشطة الاضافية وتفاصيل الترخيص يرجى مسح رمز الاستجابة السريع QR Code أعلى الصفحة

هذه الوثيقة موقعة ومصدقة إلكترونياً ولا تحتاج توقيع يدوي وفقاً لقرار مجلس الوزراء رقم (٨) وتاريخ ١٤٢٨/٠٣/٠٧ هـ المنظم للتعاملات الإلكترونية. وللتأكد من صحة الرخصة يرجى زيارة موقع المديرية العامة للدفاع المدني على الرابط التالي (www.998.gov.sa) وإدخال رقم الرخصة المذكور أعلاه - الإدارة العامة لتقنية المعلومات



920000356

@saudidcd



www.salamah.998.gov.sa

Company Legal Documents



وزارة الصناعة
والمعادن
Ministry of Industry and Mineral Resources

ترخيص منشأة صناعية

رؤية
2030
الجمهورية العربية السعودية
KINGDOM OF SAUDI ARABIA



رقم الترخيص الصناعي:
رمز المنشأة الصناعية:
اسم المنشأة الصناعية:
عنوان المنشأة الصناعية:

4602135415
4602137279
شركة روائع التشييد للصناعة شركة شخص واحد
ذهبان

تاريخ الإصدار:
الرقم الموحد:

2024-08-17
7035252605

تاريخ الانتهاء:
7035252605

2030-03-06

اسم السجل التجاري:
عنوان السجل التجاري:
رقم السجل التجاري:

شركة روائع التشييد للصناعة شركة شخص واحد
0000 ذهبان 0000-00000
4041100201

نوع السجل التجاري:

ذات مسؤولية محدودة

رأس المال:

760,000

حالة المنشأة الصناعية:

التأسيس

الإشياء

الإنتاج

للإطلاع على تفاصيل الأنشطة الاقتصادية
والمنتجات المرخصة، والبيانات التفصيلية،
والاشتراطات والمتطلبات، يرجى مسح الرمز الإلكتروني



هياكل الصناعة والثروة المعدنية



Company Legal Documents

gosi
التأمينات الاجتماعية
Social Insurance

تاريخ: 27/06/2026

موافق: 1448/01/12

عز الشهادة: 116227078

شهادة

اسم المنشأة	شركة روائع التشييد للصناعة
اسم صاحب العمل	
رقم الاشتراك	615914177
العنوان	الخرج السعودية 16455
الرقم الوطني الموحد	7004220294

عدد المشتركين السعوديين	عدد المشتركين غير السعوديين	المجموع
59	189	248
رقما	كتابة	
تسعة و خمسون مشتركا	مائة و تسعة و ثمانون مشتركا	مائتين و ثمانية و اربعون مشتركا

نشهد المؤسسة العامة للتأمينات الاجتماعية بأن المنشأة المذكورة أعلاه قد أوفت بالتزاماتها تجاه المؤسسة وفق البيانات المقدمة منها حتى تاريخ اصدار هذه الشهادة، والتي تم منحها لتقديمه لأية جهة تطلبها، وهي صالحة لجميع الأغراض التي نصت عليها الفقرة (6) من المادة (التاسعة عشر) من نظام التأمينات الاجتماعية الصادر بالمرسوم الملكي رقم (م/33) بتاريخ 1421/9/3 هـ و المادة (العاشرة) من نظام التأمينات الاجتماعية الصادر بالمرسوم الملكي رقم (م/273) وتاريخ 1445/12/26 هـ .

لا تشمل هذه الشهادة المشتركين المعلقين.

هذه الشهادة سارية المفعول حتى 1448/02/11 هـ.

الشهادة معتمدة من صاحب الصلاحية ولا تحتاج لتوقيع أو ختم



Company Legal Documents

بيئة نحيها

المركز الوطني
للمراقبة على الالتزام البيئي
National Center for Environmental Compliance
المملكة العربية السعودية



تصريح بيئي

اسم المنشأة	شركة روائع التشييد للصناعة شركة شخص واحد	هاتف	0597021273
رقم الطلب	EPOPP-2023-005596	فاكس	
العنوان	منطقة مكة المكرمة - ذهبان - حي الرياض	الرمز البريدي	23875
النشاط	انتاج خرسانة جاهزة الخلط	صندوق البريد	
رقم الموحد		المدينة	جدة
مصدره	ذهبان	تاريخ الانتهاء	29/10/2026
تاريخ الاصدار	29/10/2023	حالة المشروع	التشغيل
فئة المشروع	2		
خط الطول (شمالاً)	39.149625	خط العرض (شرقاً)	21.911694
	39.150385		21.912458
	39.151183		21.910592
	39.151848		21.911315

تم الاطلاع على مسوغات الطلب رقم (EPOPP-2023-005596) من قبل المختصين لدينا واتضح ان نشاط المنشأة يصنف حسب نظام البيئة ضمن المشاريع ذات التأثيرات البيئية المحدودة، عليه لا مانع من مزاولة النشاط مع الالتزام بالاشتراطات التالية:

- الالتزام بالمقاييس والمعايير والاشتراطات الصادرة من المركز الوطني للمراقبة على الالتزام البيئي
- السماح للتقنيين والمختصين بالمركز بالدخول للمنشأة في اي وقت
- في حال تعديل او اضافة او تغيير او توسعة في النشاط او وجود خطأ في البيانات المقدمة من صاحب الطلب يعتبر التصريح لاغي
- يجب اشعار المركز مسبقاً عند الرغبة في استخدام او استرجاع اي مخلفات صناعية ضمن عمليات التصنيع واطلاع مختصينا على التقنية والطريقة المتبعة في هذا الخصوص
- يعتبر هذا التصريح خاص بالموقع الموضح عنوانه وفي حال تغيير الموقع يلزم الحصول على تصريح للموقع الجديد
- التخلص من مخلفات المصنع وذلك بالتعاقد مع احدى الجهات المختصة
- الزام العمال على التقيد باشتراطات الصحة والسلامة المهنية
- يجب موافقة الجهات ذات العلاقة على صلاحية الموقع لممارسة النشاط
- اي كسط او تعديل في التصريح يعتبر لاغي



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3901

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei AlTashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Aggregate Scale I

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 3600 Kgs

Serial No. : H039534N48

Sensitivity : 01 Kg


Ambiance

Temperature : 25°C

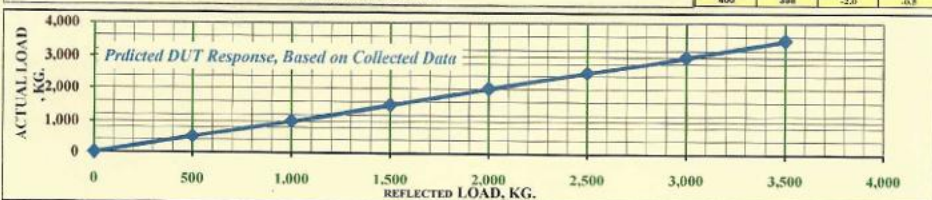
R. Humidity : 46%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg.	Indicated Load, Kg.	Error Kg.	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
220	220	-2.0	-0.7
240	240	-2.0	-0.7



Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

77944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com



For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي

للميانه

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3902

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443902

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Aggregate Scale II

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 3600 Kgs

Serial No.: H039542N48

Sensitivity: 01 Kg


Ambiance

Temperature: 26°C

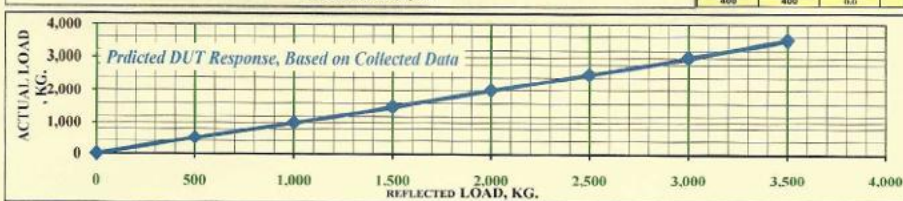
R. Humidity: 46%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg	Indicated Load, Kg	Error Kg	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
220	220	0.0	0.0
240	240	0.0	0.0
260	260	0.0	0.0
280	280	0.0	0.0
300	300	0.0	0.0
320	320	0.0	0.0
340	340	0.0	0.0
360	360	0.0	0.0
380	380	0.0	0.0
400	400	0.0	0.0



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee or any kind that, the subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 8:10

For, Naseem Dubai Establishment

Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning, Maintenance, Calibration of Plant and Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي

للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3903

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443903

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Aggregate Scale III

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 3600 Kgs

Serial No.: H039529N48

Sensitivity: 01 Kg


Ambiance

Temperature: 26°C

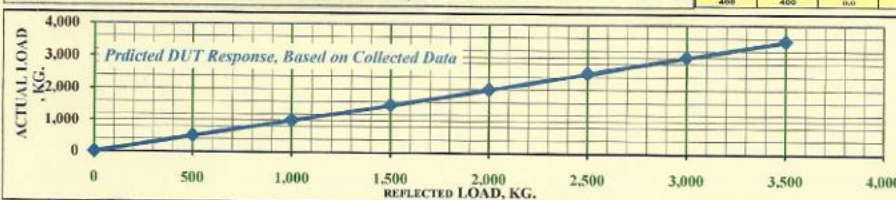
R. Humidity: 46%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg.	Indicated Load, Kg.	Error Kg.	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
300	300	0.0	0.0
400	400	0.0	0.0



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

87944 - Alkhalidiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning Maintenance Calibration of Equipment



For, Naseem Dubai Establishment

Calibration and Repair Division



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3904

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dahban, Jeddah



NDTE1503180443904

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Aggregate Scale IV

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 3600 Kgs

Serial No.: H039529N48

Sensitivity: 01 Kg


Ambiance

Temperature: 25°C

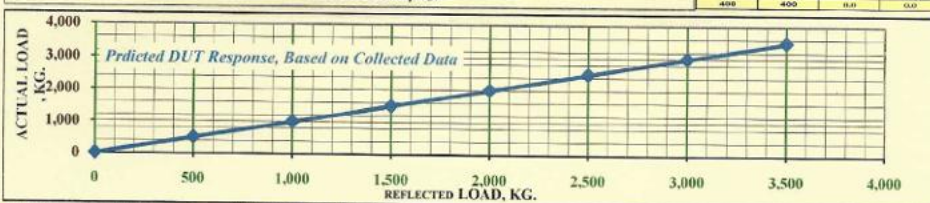
R. Humidity: 46%

Calibration Date: 31st March'2026

Valid up to

30th September'2026

Actual Load, Kg.	Indicated Load, Kg.	Error Kg.	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
220	220	0.0	0.0
240	240	0.0	0.0
260	260	0.0	0.0
280	280	0.0	0.0
300	300	0.0	0.0
320	320	0.0	0.0
340	340	0.0	0.0
360	360	0.0	0.0
380	380	0.0	0.0
400	400	0.0	0.0



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed as a guarantee of any kind that the subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



For, Naseem Dubai Establishment

Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3905

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Aggregate Scale V

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 3600 Kgs

Serial No.: H039540N48

Sensitivity: 01 Kg


Ambiance

Temperature: 25°C

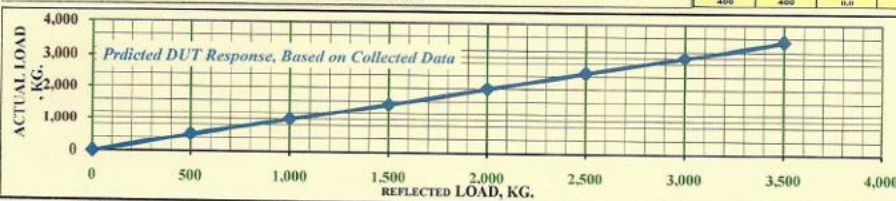
R. Humidity: 44%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg.	Indicated Load, Kg.	Error Kg.	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
300	300	0.0	0.0
400	400	0.0	0.0



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC 504020

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com



For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration & Repair Division



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3906

Issuance Date: 1-Apr-2026

File/ AC #: 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Ice Scale

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 500 Kgs

Serial No. : H039539N48

Sensitivity : 01 Kg

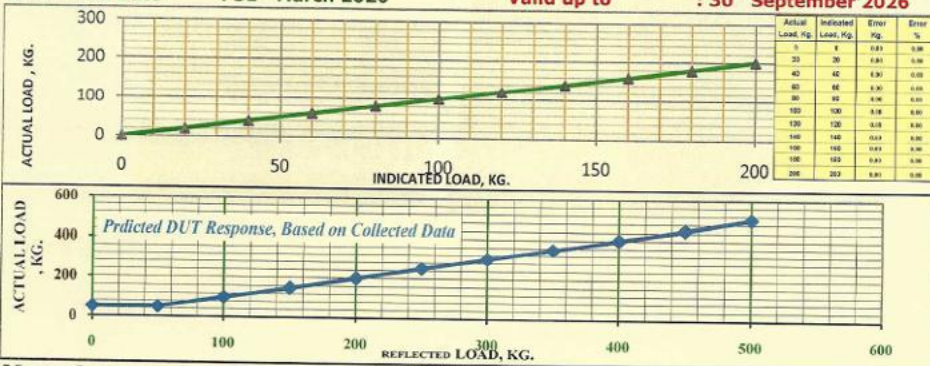
Ambiance

Temperature : 24°C

R. Humidity : 43%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 8:24

For, Naseem Dubai Establishment
Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3907

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Cement Scale

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 2000 Kgs

Serial No.: H039535N48

Sensitivity: 1 Kg


Ambiance

Temperature: 24°C

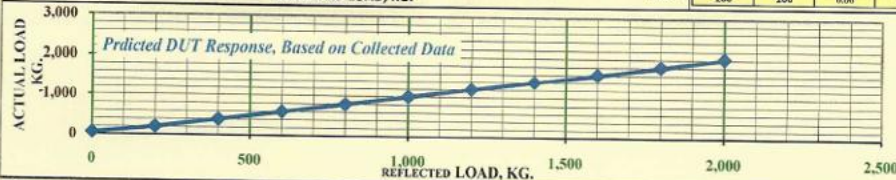
R. Humidity: 46%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg	Indicated Load, Kg	Error Kg	Error %
0	0	0.00	0.00
20	20	0.00	0.00
40	40	0.00	0.00
60	60	0.00	0.00
80	80	0.00	0.00
100	100	0.00	0.00
120	120	0.00	0.00
140	140	0.00	0.00
160	160	0.00	0.00
180	180	0.00	0.00
200	200	0.00	0.00



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 8:16
For, Naseem Dubai Establishment
Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipments



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3908

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Water Scale

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 800 Kgs

Serial No. : H039541N48

Sensitivity : 01 Kg

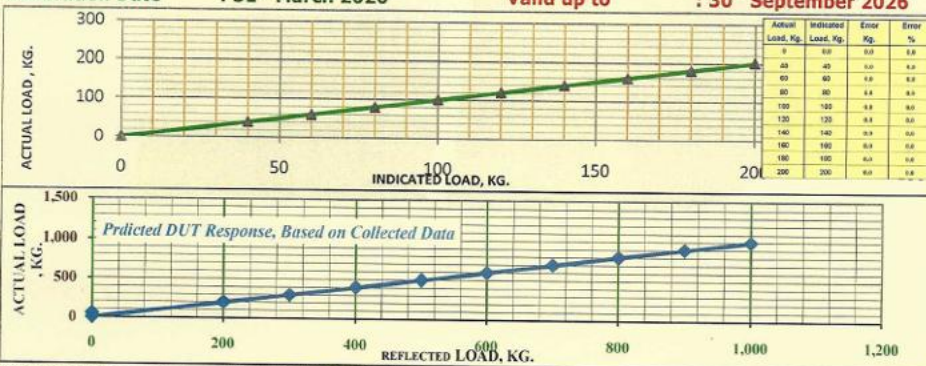
Ambiance

Temperature : 24°C

R. Humidity : 46%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

77944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@ndtestb.com - www.ndtestb.com



For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي

للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3909

Issuance Date: 1-Apr-2026

File/ AC #: 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



NDTE1503180443909

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
AddMixture Scale I

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 25 Kgs

Calibration Date : 31st March'2026

Serial No. : H039536N48

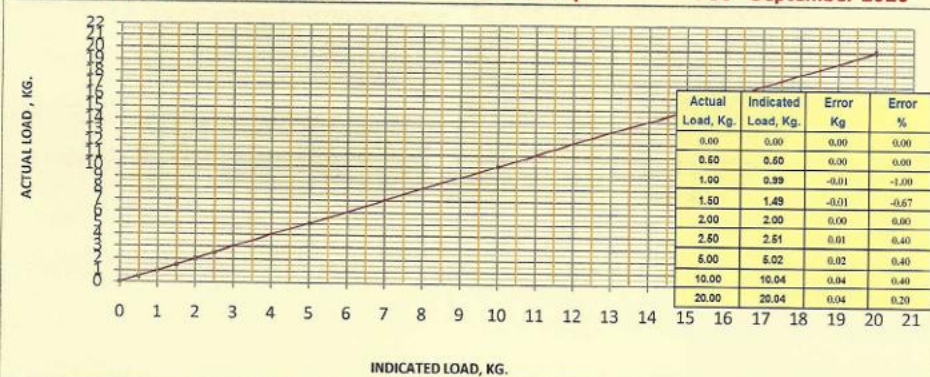
Sensitivity : 0.01 Kg

Valid up to

Ambiance

Temperature : 27°C

R. Humidity : 45%

: 30th September'2026

Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com



4/1/2026 8:18
For, Naseem Dubai Trading Est.
Calibration and Repair Division

Commissioning-Maintenance-Calibration-5th



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3911

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
AddMixture Scale III

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 25 Kgs

Serial No.: H039531N48

Sensitivity: 0.01 Kg

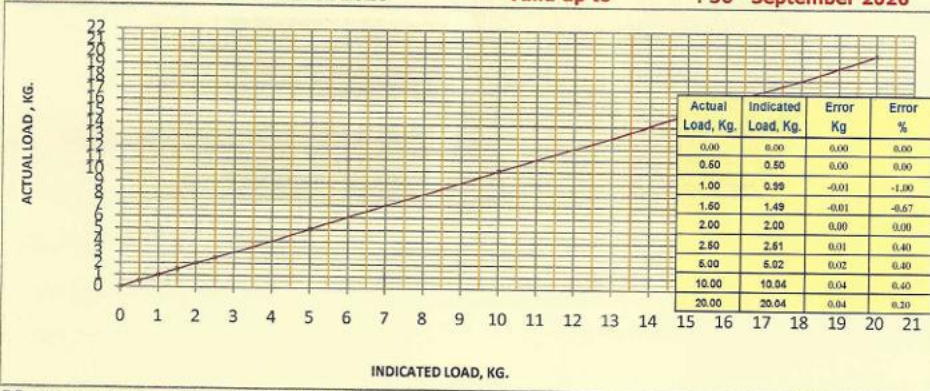
Ambiance

Temperature: 26°C

R. Humidity: 45%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the Subject will continue to retain some percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 8:21
For, Naseem Dubai Trading Est.
Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والأختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3912

Issuance Date: 1-Apr-2026

File/ AC #: 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
AddMixture Scale IV

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 25 Kgs

Calibration Date : 31st March'2026

Serial No. : H039528N48

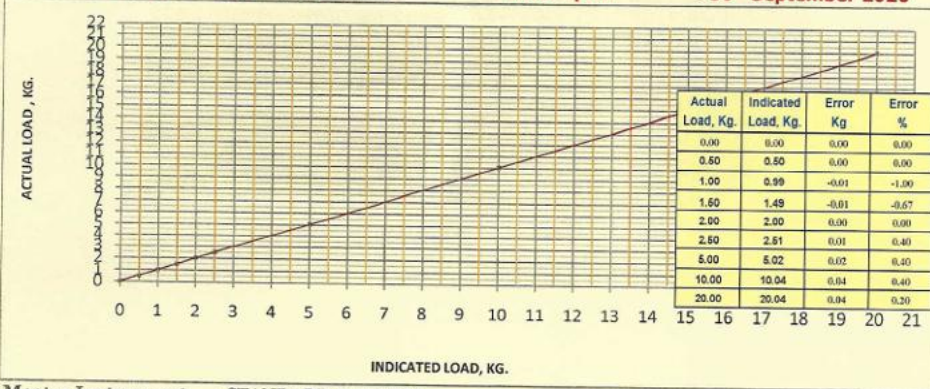
Sensitivity : 0.01 Kg

Valid up to

Ambiance

Temperature : 27°C

R. Humidity : 44%

: 30th September'2026

Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the Subject will continue to maintain some percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 8:23

For, Naseem Dubai Trading Est.

Calibration and Repair Division

7944 - Alkhalidiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtstb.com - www.dtstb.com

Commissioning-Maintenance-Calibration & Repair Division



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي

للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3913

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443913

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - A (901461)
Micro Silica Scale

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 1000 Kgs

Serial No.: H039543N48

Sensitivity: 01 Kg

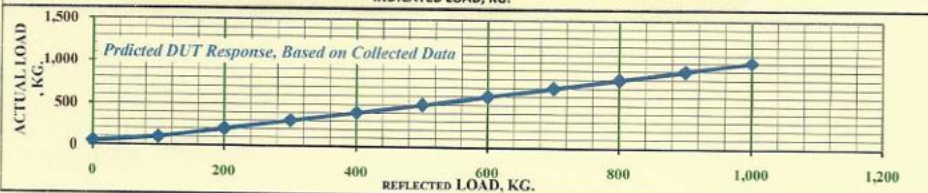
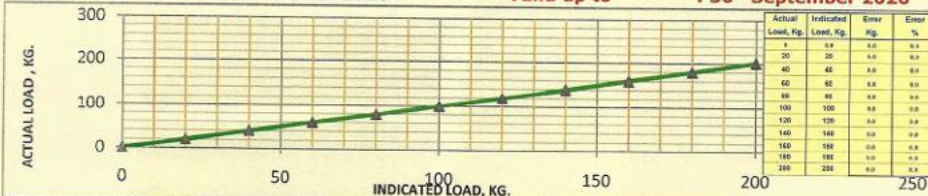
Ambiance

Temperature: 23°C

R. Humidity: 46%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 8:25
For, Naseem Dubai Establishment
Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtstb.com - www.dtstb.com

Commissioning, Maintenance, Calibration, and Repair Division



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي

للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3914

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



NDTE1503180443914

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Aggregate Scale I

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 3600 Kgs

Calibration Date : 31st March'2026


Serial No. : H039548N48

Sensitivity : 01 Kg

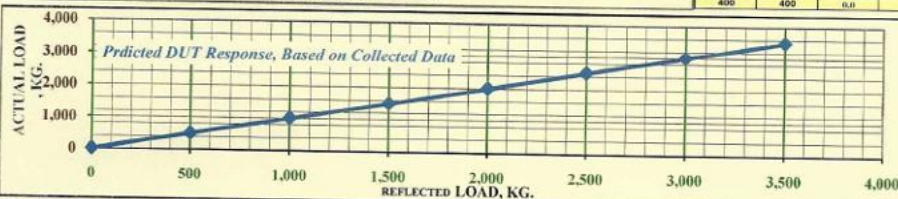
Ambiance

Temperature : 28°C

R. Humidity : 39%

Valid up to : 30th September'2026

Actual Load, Kg	Indicated Load, Kg	Error Kg	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
220	220	0.0	0.0
240	240	0.0	0.0
260	260	0.0	0.0
280	280	0.0	0.0
300	300	0.0	0.0
320	320	0.0	0.0
340	340	0.0	0.0
360	360	0.0	0.0
380	380	0.0	0.0
400	400	0.0	0.0



Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com



4/1/2026 9:03

For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipments



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي

للمصانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3915

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443915

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Aggregate Scale II

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 3600 Kgs

Calibration Date: 31st March'2026

Serial No.: H039546N48


Sensitivity: 01 Kg

Valid up to

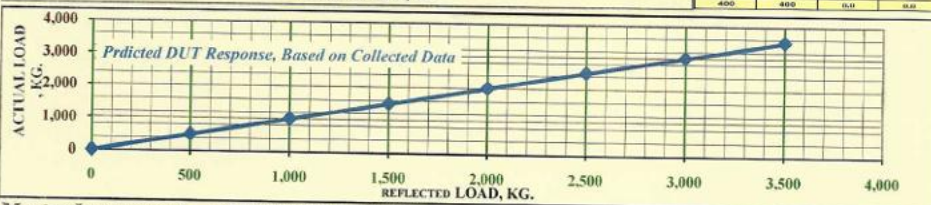
Ambiance

Temperature: 28°C

R. Humidity: 38%

: 30th September'2026

Actual Load, Kg.	Indicated Load, Kg.	Error Kg.	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
300	300	0.0	0.0
400	400	0.0	0.0



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com



4/1/2026 9:06

For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Weighing Scales and Test Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3916

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dahhban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Aggregate Scale III


Instrument Description:

Brand Name: SYMC
Model: BC360L
Capacity: 3600 Kgs
Serial No.: H039550N48
Sensitivity: 01 Kg

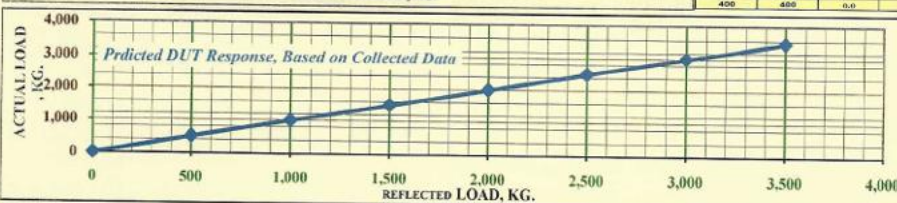
Ambiance
Temperature: 28°C
R. Humidity: 39%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg.	Indicated Kg.	Error Kg.	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
250	250	0.0	0.0
300	300	0.0	0.0
400	400	0.0	0.0



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

77944 - Alkhalidiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com



For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment.



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمرافقة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3917

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443917

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Aggregate Scale IV

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 3600 Kgs

Serial No.: H039533N48

Sensitivity: 01 Kg


Ambiance

Temperature: 29°C

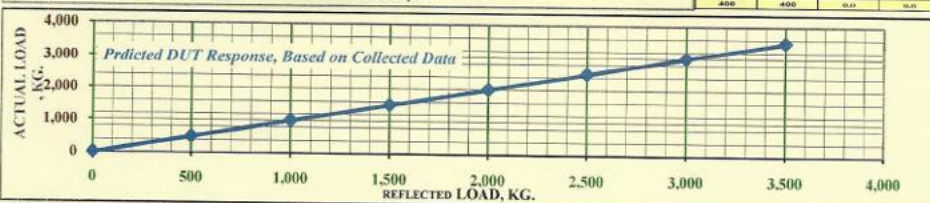
R. Humidity: 40%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg	Indicated Load, Kg	Error Kg	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
300	300	0.0	0.0
400	400	0.0	0.0



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com



For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3918

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



NDTE1503180443918

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Aggregate Scale V

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 3600 Kgs

Serial No. : H039547N48

Sensitivity : 01 Kg


Ambiance

Temperature : 27°C

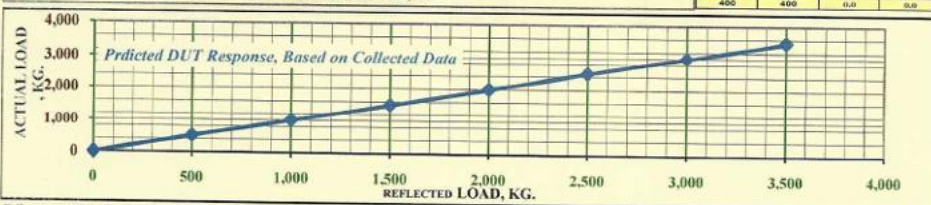
R. Humidity : 36%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

Actual Load, Kg.	Indicated Load, Kg.	Error Kg.	Error %
0	0	0.0	0.0
20	20	0.0	0.0
40	40	0.0	0.0
60	60	0.0	0.0
80	80	0.0	0.0
100	100	0.0	0.0
120	120	0.0	0.0
140	140	0.0	0.0
160	160	0.0	0.0
180	180	0.0	0.0
200	200	0.0	0.0
220	220	0.0	0.0
240	240	0.0	0.0
260	260	0.0	0.0
280	280	0.0	0.0
300	300	0.0	0.0
320	320	0.0	0.0
340	340	0.0	0.0
360	360	0.0	0.0
380	380	0.0	0.0
400	400	0.0	0.0



Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com



For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة
إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3919

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Ice Scale

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 500 Kgs

Serial No.: H039532N48

Sensitivity: 01 Kg

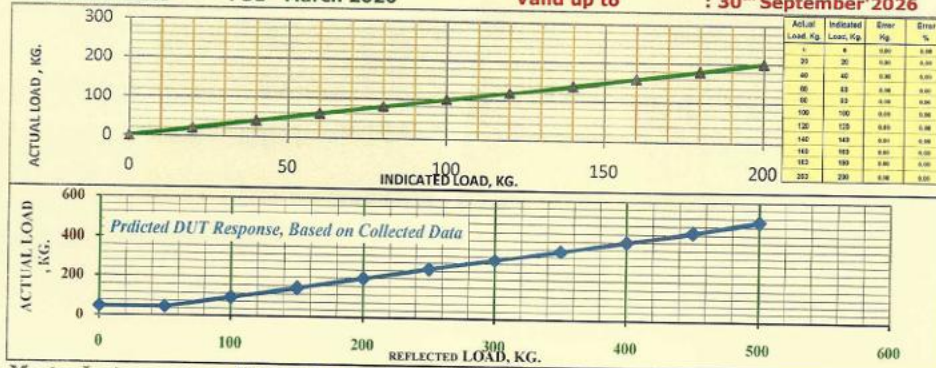
Ambiance

Temperature: 30°C

R. Humidity: 38%

Calibration Date: 31st March'2026

Valid up to

30th September'2026

Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported. Since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



For, Naseem Dubai Establishment
Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3920

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dahban, Jeddah



NDTE1503180443920

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Cement Scale

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 2000 Kgs

Calibration Date: 31st March'2026

Serial No.: H039549N48


Sensitivity: 1 Kg

Valid up to

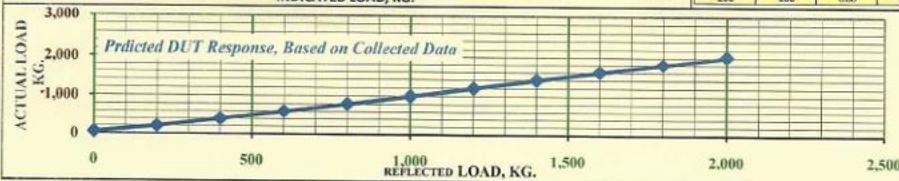
Ambiance

Temperature: 28°C

R. Humidity: 42%

: 30th September'2026

Actual Load, Kg	Indicated Load, Kg	Error Kg	Error %
0	0	0.00	0.00
20	20	0.00	0.00
40	40	0.00	0.00
60	60	0.00	0.00
80	80	0.00	0.00
100	100	0.00	0.00
120	120	0.00	0.00
140	140	0.00	0.00
160	160	0.00	0.00
180	180	0.00	0.00
200	200	0.00	0.00



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:11
For, Naseem Dubai Establishment
Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment

Automation & Calibration Services for MRO & Industrial Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3921

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443921

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Water Scale

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 800 Kgs

Serial No.: H039538N48

Sensitivity: 01 Kg

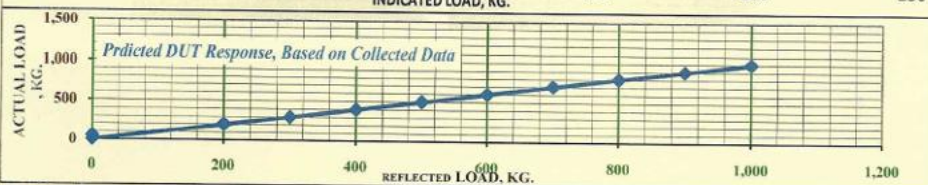
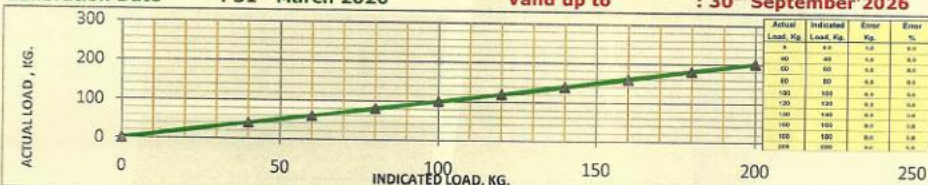
Ambiance

Temperature: 29°C

R. Humidity: 40%

Calibration Date: 31st March'2026

Valid up to

30th September'2026

Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

For, Naseem Dubai Establishment

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3922

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



NDTE1503180443922

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
AddMixture Scale I

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 25 Kgs

Calibration Date : 31st March'2026

Serial No. : H039545N48

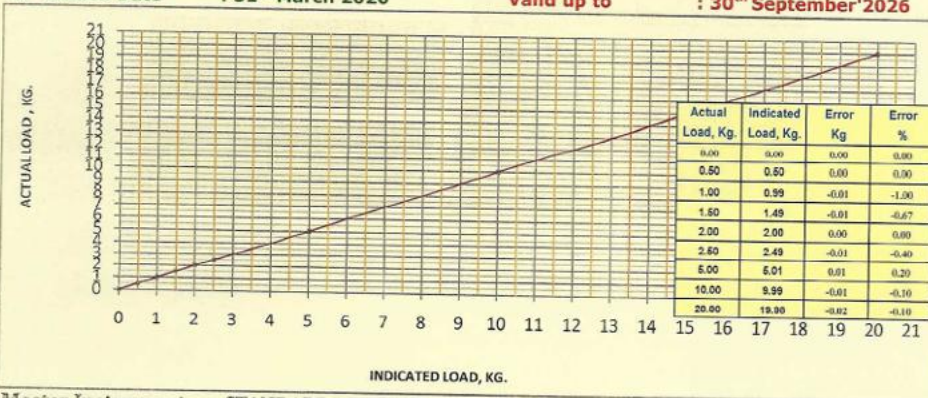
Sensitivity : 0.01 Kg

Ambiance

Temperature : 28°C

R. Humidity : 42%

Valid up to

: 30th September'2026

Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

7944 - Alkhalidiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtstb.com - www.dtstb.com



For, Naseem Dubai Trading Est.

Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3923

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443923

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
AddMixture Scale II

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 25 Kgs

Calibration Date: 31st March'2026

Serial No.: H039537N48

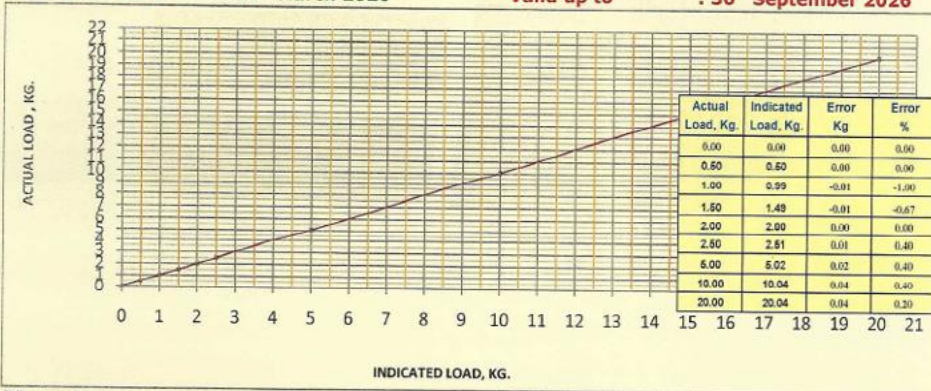
Sensitivity: 0.01 Kg

Ambiance

Temperature: 29°C

R. Humidity: 41%

Valid up to

: 30th September'2026

Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtetb.com - www.dtetb.com



4/1/2026 9:13
For. Naseem Dubai Trading Est.
Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3924

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



NDTE1503180443924

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
AddMixture Scale III

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 25 Kgs

Serial No. : H039551N48

Sensitivity : 0.01 Kg

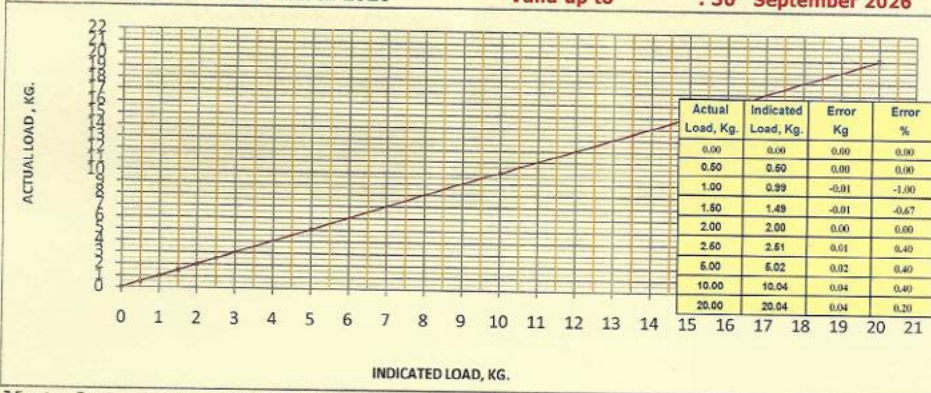
Ambiance

Temperature : 29°C

R. Humidity : 42%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com



4/1/2026 9:14
Fey, Naseem Dubai Trading Est.
Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3925

Issuance Date: 1-Apr-2026

File/ AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Concrete Batching Plant

Location : Dhahban, Jeddah



NDTE1503180443925

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
AddMixture Scale IV

Instrument Description:

Brand Name : SYMC

Model : BC360L

Capacity : 25 Kgs

Calibration Date : 31st March'2026

Serial No. : H039527N48

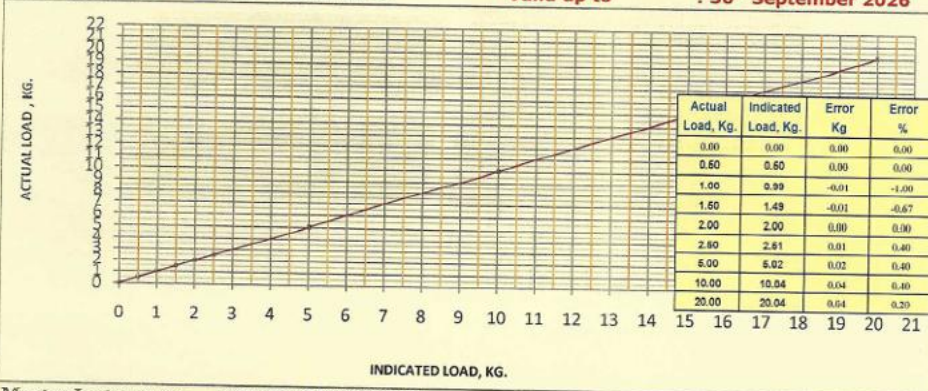
Sensitivity : 0.01 Kg

Valid up to

Ambiance

Temperature : 28°C

R. Humidity : 43%

: 30th September'2026

Master Instrument : STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:15

For, Naseem Dubai Trading Est.


Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment
Automation & Calibration Services for Various Industries



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3926

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Concrete Batching Plant

Location: Dhahban, Jeddah



NDTE1503180443926

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C94 ($\pm 1\%$ requirement) was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Parent Equipment
Concrete Batching Plant - B (901462)
Micro Silica Scale

Instrument Description:

Brand Name: SYMC

Model: BC360L

Capacity: 1000 Kgs

Serial No.: H039552N48

Sensitivity: 01 Kg

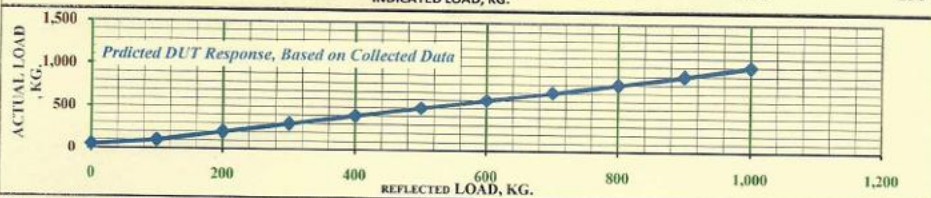
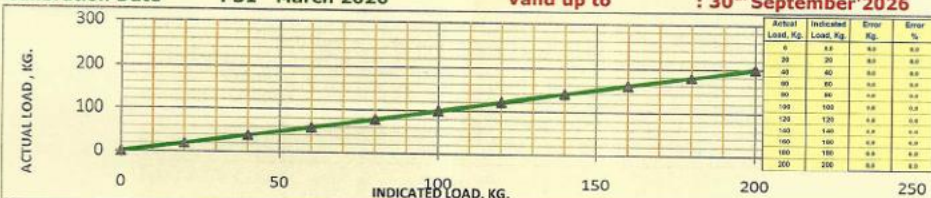
Ambiance

Temperature: 30°C

R. Humidity: 38%

Calibration Date: 31st March'2026

Valid up to

30th September'2026

Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the Subject will continue to retain some percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:17

For, Naseem Dubai Establishment

Calibration and Repair Division

87944 - Alkhalidiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtstb.com - www.dtstb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3927

Issuance Date: 1-Apr-2026

File/AC #: 150318-044

Client : Rawae Al Tashied

Project Name : Quality Control Lab.

Location : Dhahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C39, E74 and BS:1610 Part 1:1992 were found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Compressive strength Tester

Instrument Description:

Brand Name : CONTROLS

Model/Serial No. : C43W02 / 23701814

Calibration Date : 31st March'2026

Capacity : 2000 KN

Sensitivity : 0.1 KN

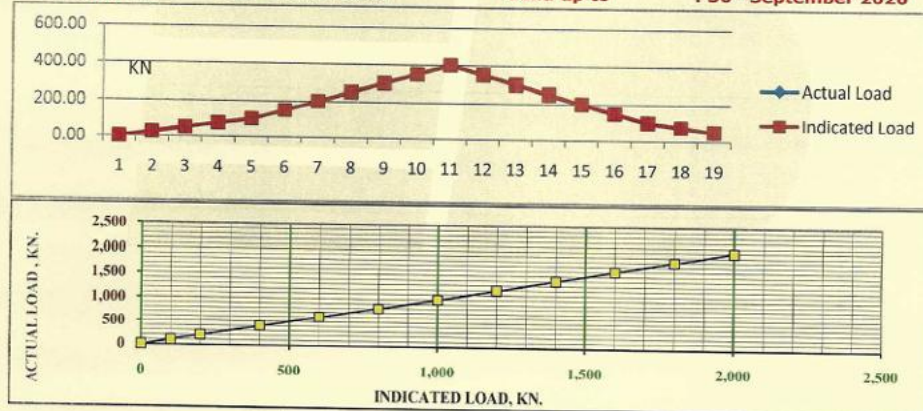
Valid up to

Ambiance

Temperature : 24 °C

R. Humidity : 47%

: 30th September'2026



Reflected 100 % Capacity Based on Collected Data

Instrument Name : LOAD CELL WITH DIGITAL INDICATOR

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that the Subject will continue to retain some percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504070
7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtstb.com - www.dtstb.com

4/1/2026 9:28
For, Naseem Dubai Establishment
Calibration and Repair Division

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment
Automation & Calibration Services for Material Testing Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3928

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Quality Control Lab.

Location: Dhahban, Jeddah



NDTE1503180443928

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM E 145, AASHTO M231, ASTM C127 were found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Drying / Heating Oven

Instrument Description:

Brand Name: CONTROLS

Model/ : 10-D1390/25L

Serial No. : 23000139

Capacity : Ambient, 200 °C

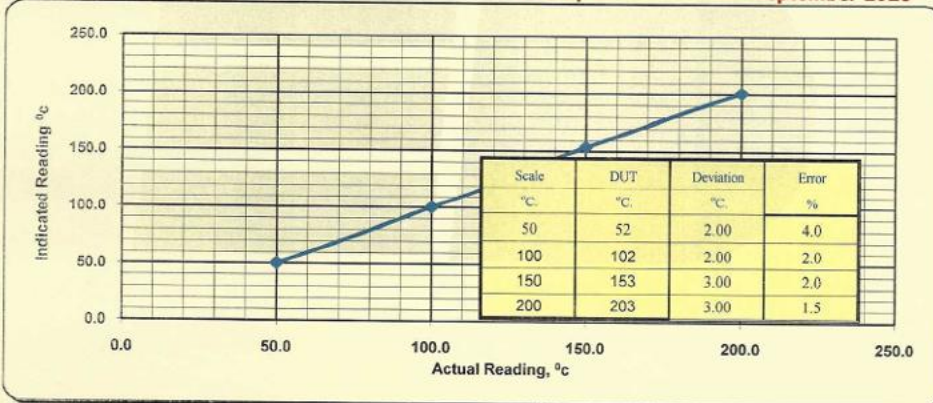
Ambiance

Temperature : 26°C

R. Humidity : 44%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

Master Instrument : Digital Thermometer

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment.



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:31
For, Naseem Dubai Establishment
Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3929

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawae Al Tashied

Project Name: Quality Control Lab.

Location: Dhahban, Jeddah



NDTE1503180443929

Certifies that the instrument listed below has been tested and calibrated within the limitations of its OEM's specifications and meets the requirements of IS: 2386 (Part4) 1007, BS-812, EN1097-2, ASTM C-131, C535, and AASHTO T96. Results were found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment. If so, the instrument need to recalibrate, irrespective of the validity of the certificate.

LosAnglese Tester

Instrument Description:

Brand Name: UTEST

Model/ : UTA-0600-A

Serial No. : 23/001253

Ambiance

Temperature : 27 °C

R. Humidity : 44%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

S.No.	Parameter	Calculated	Standard	Result
1	Cylindrical Barrel Diameter :	70 cm	70 ± 2cm	Pass
2	Total Number of Revolutions :	33 rpm	30-33 rpm	Pass
3	Total Number of Balls :	12	12	
4	Dia Meter of Set 1 :	47.6250 mm	47 ± 1mm	Pass
5	Number of Balls set 1 :	5		
6	Dia Meter of Set 2 :	46.0375 mm	46 ± 1mm	Pass
7	Number of Balls set 2 :	7		
8	Total weight of Balls :	5004.00g	5000 ± 25g	Pass
9	General Structural and Installation State :			Satisfactory

Master Instrument : Digital Balance , Verniar Calipers , Techometer and Digital Stop watch

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:33
For, Naseem Dubai Establishment
Calibration and Repair Division

97944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@ndtestb.com - www.ndtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للميانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3930

Issuance Date: 1-Apr-2026

File/AC #: 150318-044

Client : Rawaei Al Tashied

Project Name : Quality Control Lab.

Location : Dhahban, Jeddah



NDTE1503180443930

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM D2419, AASHTO T176 were found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Sand Equivalent Specimen Shaker

Instrument Description

Brand Name : UTEST

Model : UTA-0510-K

Serial No. : 23/000873

Ambiance

Temperature : 28 °C

R. Humidity : 44%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026

Parameter	Standard	Result
1 Horizontal Movement	203.2mm ±1mm	PASS
2 Cycle	175 ± 2 / min	PASS
3 Low Timer	59:59:00 Adjustable	PASS
4 High Timer	59:50:00 Adjustable	PASS

Master Instrument/ Standard : OEM Specification Data Sheet, Digital stop Watch, Standard Ruler, Event Counter

This letter of certification is issued as a statement of fact that on this date the instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:34
For, Naseem Dubai Establishment
Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@ndtestb.com - www.ndtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3931

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Quality Control Lab.

Location: Dhahban, Jeddah



NDTE1503180443931

Certifies that the instrument listed below has been tested and calibrated using standards whose accuracies are traceable to national or international standards, within the limitations of its calibration services. Basis of tolerance ASTM C39, E74 and BS:1610 Part 1:1992 which found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

AIR CONTENT METER

Instrument Description:

Brand Name: Beijing Instruments

Model/Serial No.: AHC-7L 2327519 / NGA0115

Calibration Date: 31st March'2026

Valid up to

Ambiance

Temperature: 26 °C

Humidity: 42%

: 30th September'2026

Standard		% Of AIR Entrained With Reference to the Volume						DUT
ASTM 231 / OEM		Trial 1		Trial 2		Trial 3		Pass/Fail
%	Vol. (ml)	%	Vol. (ml)	%	Vol. (ml)	%	Vol. (ml)	Status
5	354	5	354	5	354	5	354	PASS
10	708	10.1	708	10	708	10	708	PASS
15	1062	15	1062	15	102	15.1	1062	PASS

Instrument Name: Calibrated JAR, Acopnied Accessories (Fittings)

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:37
For, Naseem Dubai Establishment
Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3932

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaee Al Tashied

Project Name: Quality Control Lab.

Location: Dahban, Jeddah



NDTE1503180443932

Certifies that the instrument listed below has been tested and calibrated within the limitations of its OEM's specifications. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Electronic Weighing Balance

Instrument Description:

Brand Name: WANT

Model/Serial No.: WT30000XEJ / 230227318

Capacity: 30000 g Div: 1g

Ambiance

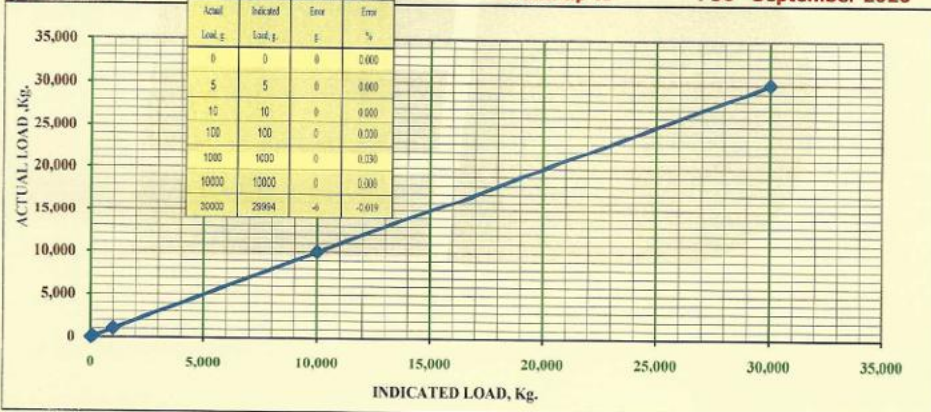
Temperature: 26 °C

R. Humidity: 42%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026



Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



For, Naseem Dubai Establishment
Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtstb.com - www.dtstb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3933

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Quality Control Lab.

Location: Dhahban, Jeddah



NDTE1503180443933

Certifies that the instrument listed below has been tested and calibrated within the limitations of its OEM's specifications. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Electronic Weighing Platform

Instrument Description:

Brand Name: CAMERY

Model/Serial No.: TCS-JE62Z / T62Z300220 40101

Capacity: 300 Kg (Dual) Div: 20 g

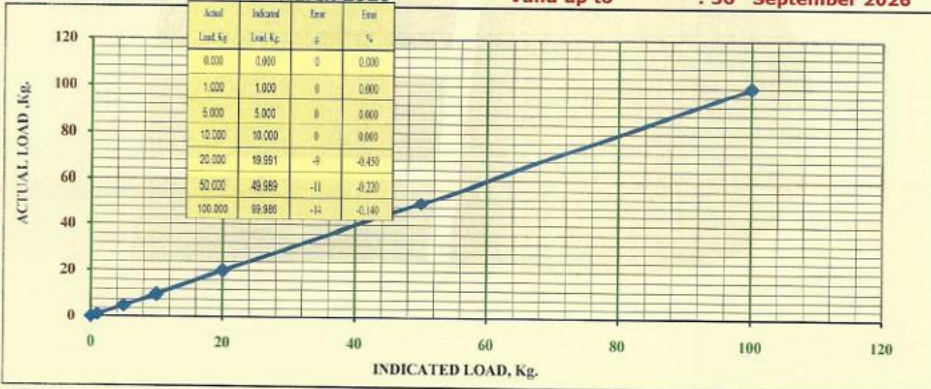
Ambiance

Temperature: 25 °C

R. Humidity: 44%

Calibration Date: 31st March'2026

Valid up to

30th September'2026

Master Instrument: STANDARD WEIGHTS

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



For, Naseem Dubai Establishment
Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للمصانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3934

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Quality Control Lab.

Location: Dhahban, Jeddah



NDTE1503180443934

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C 805 was found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Schmidt (Rebound) Hammer

Instrument Description:

Brand Name: MATEST

Model: C380/ 3Y 0483

Serial No.: C380/BC/0197

Ambiance

Temperature: 30 °C

R. Humidity: 46%

Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Calibration Parameters and Compliance Data:

	Standard	Trial 1	Trial 2	Trial 3	AVRG	Result
1	80±2	81	81	80	80.66667	Pass
2	80±2	79	80	80	79.66667	Pass
3	80±2	78	80	80	79.33333	Pass
4	80±2	79	80	81	80	Pass
5	80±2	81	81	80	80.66667	Pass
6	80±2	78	79	81	79.33333	Pass
7	80±2	80	80	79	79.66667	Pass

Average Result On Standards Anvil

79.9047619

PASS

Master Instrument:

Standard Test Anvil

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 9:45
For, Naseem Dubai Establishment
Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والأختبار والمراقبة والتحكم

Certificate of Inspection

CERTIFICATE NO. NDTE/150318-044-3935

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Quality Control Lab.

Location: Dhahban, Jeddah



NDTE1503180443935

Certifies that the instrument listed below has been tested and Results were found within the limitations of its specifications. Basis of tolerance was OEM standard. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Hygrometer

Instrument Description:

Brand Name: N/A

Model/Serial No.: PMTC-1273

Capacity: Internal: -10 / +50 °C

Accuracy Temp.: $\leq \pm 1$ °C

S. No. N/A

External: -50 / +70 °C

Hygro: $\leq \pm 5$ %RH

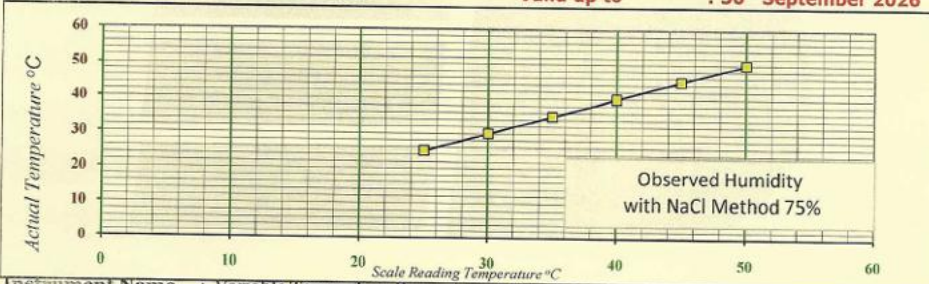
Ambiance

Temperature: 26 °C

R. Humidity: 46%


Calibration Date: 31st March'2026

Valid up to

: 30th September'2026

Instrument Name: Variable Temperature Source (well), Digital Thermometer

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 10:27
For, Naseem Dubai Trading Est.
Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment

Automation & Calibration Services for Various Industries



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Inspection

CERTIFICATE NO. NDTE/150318-044-3936

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaee Al Tashied

Project Name : Quality Control Lab.

Location : Dhahban, Jeddah



Certifies that the instrument listed below has been tested and Results were found within the limitations of its specifications. Basis of tolerance was OEM standard. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Hygrometer

Instrument Description:

Brand Name : N/A

Model/Serial No. : PMTC-1273

S. No. N/A

Ambiance

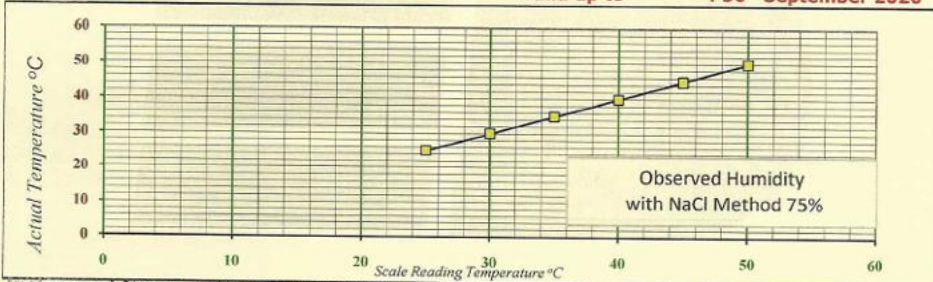
Capacity Intenal : -10 / +50 °C

External : -50 / +70 °C

Temperature : 25 °C

Accuracy Temp. : $\leq \pm 1$ °CHygro : $\leq \pm 5$ %RH

R. Humidity : 46 %

Calibration Date : 31st March'2026Valid up to : 30th September'2026

Instrument Name : Variable Temperature Source(well). Digital Thermometer

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 10:58

For, Naseem Dubai Trading Est

Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Inspection

CERTIFICATE NO. NDTE/150318-044-3937

Issuance Date: 1-Apr-2026

File / AC #: 150318-044

Client: Rawaei Al Tashied

Project Name: Quality Control Lab.

Location: Dhahban, Jeddah



NDTE1503180443937

Certifies that the instrument listed below has been tested and Results were found within the limitations of its specifications. Basis of tolerance was OEM standard. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Hygrometer

Instrument Description:

Brand Name: N/A

Model/Serial No.: PMTC-1273

S. No. N/A

Ambiance

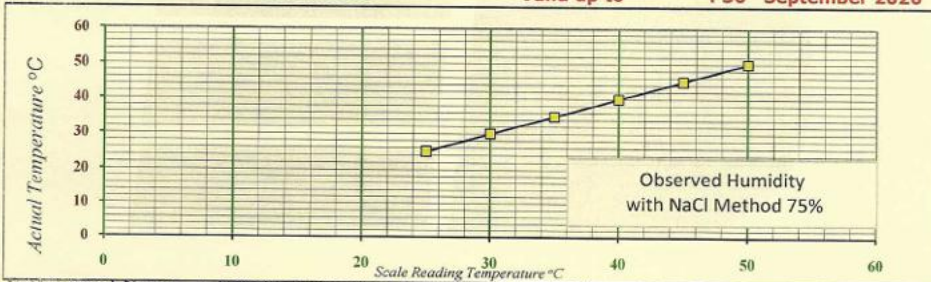
Capacity Internal: -10 / +50 °C

External: -50 / +70 °C

Temperature: 25 °C

Accuracy Temp.: $\leq \pm 1$ °CHygro: $\leq \pm 5$ %RH

R. Humidity: 46%

Calibration Date: 31st March'2026Valid up to: 30th September'2026

Instrument Name: Variable Temperature Source (well). Digital Thermometer

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 10:59 21/04/2026

For, Naseem Dubai Trading Est

Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment
Automation & Calibration Services for Industrial and Laboratory Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3938

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Quality Control Lab.

Location : Dahban, Jeddah



Certifies that the instrument listed below has been tested and calibrated using accompanied standards and was found within the limitations of its calibration services. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

pH / Temp. Meter

Instrument Description:

Brand Name	: HANNA	P. Code	: HI98108	
Model	: pHep ⁺	Serial No.	: LA05410664	
Range	pH : 0.14 pH	Temp.	: 0.0-50.0 °C	Ambiance
Resolution	pH : 0.01pH	Temp.	: 0.1°C	Temperature : 24 °C
Accuracy	pH : ± 0.1 Ph	Temp.	: 0.5°C	R. Humidity : 43%

Calibration Date : 31st March'2026Valid up to : 30th September'2026

Refferance

pH	Temp oC
4	25
6.86	25
9.18	25

Result on DUT

pH	Temp oC
4	24.7
7	24.9
9	24.9

Master Instrument : Standard Solution

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 11:01
For, Naseem Dubai Establishment
Calibration and Repair Division

87944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dtestb.com - www.dtestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3939

Issuance Date: 1-Apr-2026
File / AC # : 150318-044
Client : Rawaei Al Tashied
Project Name : Quality Control Lab.
Location : Dhahban, Jeddah



NDTE1503180443939

Certifies that the instrument listed below has been tested and calibrated using accompanied standards and was found within the limitations of its calibration services. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

TDSMeter

Instrument Description:

Brand Name	: HANNA	P.Code	HI98301	
Model	: DiST 1	Serial No.	: HA05430795	
Range TDS	: 0-2000(ppm)mg/L	Temp.	: 00.0~50.0°C	Ambiance
Resolution TDS	: 1ppm	Temp.	: 0.1°C	Temperature : 27 °C
Accuracy TDS	: ± 2% Full Scale	Temp.	: ± 0.5°C	Humidity : 41%
Calibration Date	: 31 st March'2026	Valid up to	: 30 th September'2026	

Refferance			Result on DUT		
TDS ppm		Temp oC	TDS ppm		Temp oC
300		25	302		24.7
1000		25	1007		24.9
1000		25	1003		24.9

Reference Standard : Standard solutions & digital Thermometer

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 11:03
For, Naseem Dubai Establishment
Calibration and Repair Division

97944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3940

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaei Al Tashied

Project Name : Quality Control Lab.

Location : Dhahban, Jeddah



NDTE1503180443940

Certifies that the instrument listed below has been tested within the limitations of its calibration services. Basis of tolerance ASTM C1064-86 were found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Digital Thermometer

Instrument Description:

Brand Name : ETI

Model/Serial No. : 810-257

Capacity : -49.9°C ~ +199.9°C (50.200)

Scale Digital

RESOLUTION : 0.1°C

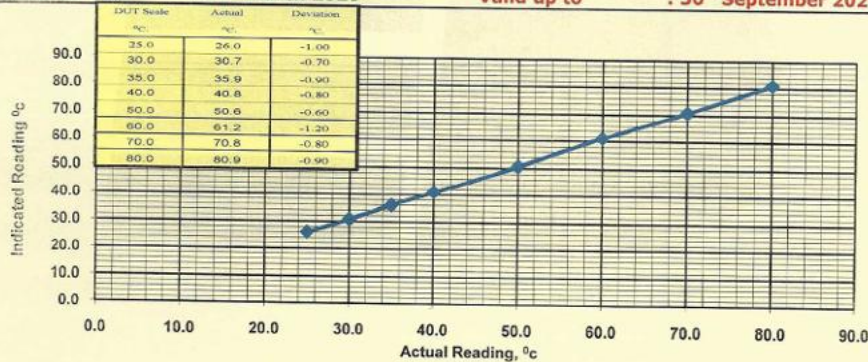
Ambiance

Temperature : 26 °C

R. Humidity : 44%

Calibration Date : 31st March 2026

Valid up to

: 30th September 2026

Master Instrument : Digital Thermometer

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the subject instrument/ equipment.



ISO/IEC 17025:2017/EAC-504020



4/1/2026 11:27

For, Naseem Dubai Establishment

Calibration and Repair Division

7944 - Alkhaldiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dttestb.com - www.dttestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment
Automation & Calibration Services for Various Industries



Concrete Batching Plants and Lab Equipments Calibrations



C.R. 1131029534

مؤسسة نسيم دبي
للصيانة

إصلاح وصيانة معدات القياس والاختبار والمراقبة والتحكم

Certificate of Calibration

CERTIFICATE NO. NDTE/150318-044-3941

Issuance Date: 1-Apr-2026

File / AC # : 150318-044

Client : Rawaee Al Tashied

Project Name : Quality Control Lab.

Location : Dhahban, Jeddah



NDTE1503180443941

Certifies that the instrument listed below has been tested and calibrated within the limitations of its calibration services. Basis of tolerance ASTM C1064-86 which found satisfactory. This certificate will be void, if the instrument is subjected to any damage, maintenance, repair or any adjustment, if so the instrument need to recalibrate, irrespective of the validity of the certificate.

Digital Thermometer

Instrument Description:

Brand Name : ETI

Model/Serial No. : 810-257

Capacity : -49.9°C ~ +199.9°C (50-200)

Scale Digital

RESOLUTION : 0.1°C

Ambiance

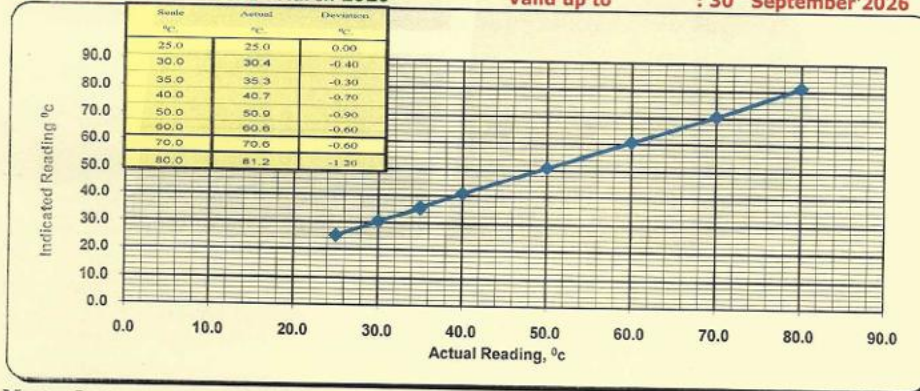
Temperature : 27 °C

R. Humidity : 44%

Calibration Date : 31st March'2026

Valid up to

: 30th September'2026



Master Instrument : Digital Thermometer

This letter of certification is issued as a statement of fact that on this date the Instrument/ Equipment has an efficiency as indicated. It should not be construed or regarded as a guarantee of any kind that, the Subject will continue to retain same percentage of accuracy or efficiency as determined on the date when the calibration was performed and reported, since the calibrator has absolutely no control over the future operation, damage, maintenance, repair and overall condition of the Subject Instrument/ Equipment



ISO/IEC 17025:2017/EAC-504020



4/1/2026 11:38
For, Naseem Dubai Establishment
Calibration and Repair Division

87944 - Alkhalidiya, Al Rabeeh - Buraydah - 52362 - 3134 - Kingdom of Saudi Arabia
050 518 4343 - 050 495 4756 - info@dstestb.com - www.dstestb.com

Commissioning-Maintenance-Calibration of Electronic Instruments and Lab Equipment
Automation & Calibration Services for Manufacturing Industries



Quality Test Reports of Raw Materials

LETTER OF TRANSMITTAL

To	Rawee Al Tashied for Industry Co		
Attention	Mr. Yasir Nazir /Mobile:- 0580021806 /Email:- Yasir.nazir@rtmix.co		
Reference	Test Reports		
Project: Rawee Altashied For Industry Company		Report Date	10 February 2026
		Job No.	244000
Attached hereto are report as follows:			
Copies	Date or Number	Description	No of Tests
1	JD-CMT-MO-26-00063	Physical Analyses on Coarse (3/4") Aggregate Summary Test Report	01
1	JD-CMT-MO-26-00063	Physical Analyses on Coarse (3/8") Aggregate Summary Test Report	01
1	JD-CMT-MO-26-00063	Physical Analyses on Natrual Course And Natural Fine Sand Combined Aggregate Summary Test Report	01
1	JD-CMT-MO-26-00063	Physical Analyses on Natrual Course Sand Summary Test Report	01
1	JD-CMT-MO-26-00063	Physical Analyses on Natrual Fine Sand Summary Test Report	01

REMARKS: _____

SIGNED



For FUGRO-SUHAIMI LTD
Irfan Zaib Khan JCC # 80024022
Asst. Lab Manager, Jeddah

Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

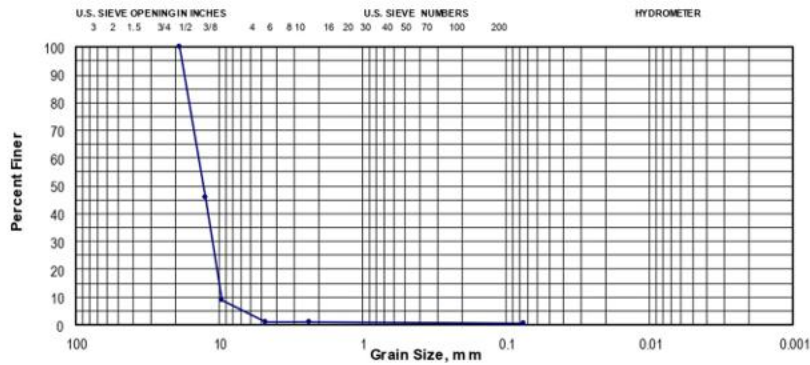
PO BOX 133622 - Tel.: (012) 697 0081
Jeddah 21382 - Fax.: (012) 257 4907
Saudi Arabia - E-mail.: fsljeddah@fugro-suhaimi.com



TL-1301

PARTICLE SIZE ANALYSIS OF COARSE AGGREGATE - TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee Altashied For Industry Company	Job No.	244000
Location	Jeddah KSA	Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00239
Source / Location	RTCO	RFI #	Not Provided
Material	3/4" Aggregate	Test Date	02-Feb-2026
Client Contact	Mr. Yasir Nazir / Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan / Method	ASTM C 136



Sieve Size	Percent Passing	*Specification	Properties Tested	Test Result	*Spec
1/2" (12.5 mm)	46	-	Material finer than 75 micron (No. 200), %	0.4	-
3/8" (9.50 mm)	9	-	-	-	-
No.4 (4.75 mm)	1	-	-	-	-
No.8 (2.36 mm)	0.8	-	-	-	-
No.200 (0.75 mm)	0.4	-	-	-	-

Remarks: The test result relate only to the items tested.

Tested by: Dilawar

Checked By: Muhammad Amir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022



Accepted



السيد محمد - فغرو



The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.06B Issue. 01 Rev. 01 Date: 06 December 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السيد محمد - فغرو
FUGRO-Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail.: fsjeddah@fugro-suhaimi.com

TL-1301

PHYSICAL AND CHEMICAL ANALYSES OF COARSE AGGREGATE-TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee Altashied For Industry Company	Job No.	244000
		Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00240
Source Location	RTCO Concrete Batch Plant Jeddah	Test Date	04-Feb-2026
Client Contact	Mr. Yasir Nazir /Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan/ Test Method	ASTM D75 As mentioned below

Page. 01 of 02

1.	Sieve Analysis (ASTM C-136)	Percent Passing by weight.	
	Sieve size	Single Sized Aggregate (Nominal Max. Size : 3/4")	
	3/4" (19.00 mm)	100	
	1/2" (12.5 mm)	46	
	3/8" (9.5 mm)	9	
	No.4 (4.75 mm)	1	
	No.8 (2.36 mm)	0.8	
	No.200 (0.075 mm)	0.4	
		TEST RESULTS	PROJECT SPECIFICATION
2.	Material Finer than No.200 Sieve, (ASTM C-117).	3/4" Coarse Aggregate	**ASTM C-33 Specification, Limits
	Material Finer than No.200 (0.075 mm) Sieve, % by Weight	0.4	1.0 (Max.)
3.	Soundness, (ASTM C-88).		
	Percent Loss at 5 Cycles using Saturated Solution of Magnesium Sulfate	4	18.0 (Max.)
4.	Clay Lumps and Friable Particles, (ASTM C-142).		
	Clay Lumps and Friable Particles, % by weight	0.23	3.0 (Max.)
5.	Los Angeles Abrasion, (ASTM C-131).		
	GRADING	B	-
	Percent Loss at 100 Revolutions	4.2	-
	Percent Loss at 500 Revolutions	19.6	50 (Max.)
	Ratio of Abrasion Loss at 100 & 500 Revolutions (100/500 Revolution value)	0.21	-

(Cont...Next Page)

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.15 Issue. 01 Rev. 03 Date: 01 May 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

*** The PDF document is electronically generated and digitally signed ***

السويدي - فيشر
FUGRO-Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail: fsjeddah@fugro-suhaimi.com

TL-1301

JD-CMT-MO-26-00063

Page. 02 of 02

	TEST RESULTS	PROJECT SPECIFICATION
	3/4" Coarse Aggregate	**ASTM C-33 Specification, Limits
6. Specific Gravity and Absorption, (ASTM-127)		
Bulk Specific Gravity, (Dry)	2.782	-
Bulk Specific Gravity, (SSD)	2.802	-
Apparent Specific Gravity	2.840	-
Absorption, % by weight	0.73	-
7. Flakiness and Elongation Index (BS 812 – Part 105:1990)		
Flakiness Index	16	
Elongation Index	18	
8. Lightweight Particles (ASTM C-123)		
Coal and Lignite, % by weight	Nil (0)	0.5 (Max.)
9. Moisture Contents, (ASTM C-566)		
Total Moisture Content of Aggregate Percent	0.2	
10. Unit Weight of Aggregate (ASTM C-29)		
Unit Weight Dry Loose, Kg/m ³	1529	-
Unit Weight Dry Rodded, Kg/m ³	1656	-

****ASTM C-33 “Standard Specification for Concrete Aggregates”.**

Conclusion : The sand sample tested **conforms** to the indicated test requirement limits of ASTM C-33.

The coarse aggregate is considered **acceptable** to be used for concrete production.

Remarks The test result relate only to the items tested.

Tested by: Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company

Form No. MAT.4.15 Issue. 01 Rev. 03 Date: 01 May 2021

Page 2 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السويديم - فينغرو
FUGRO-Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

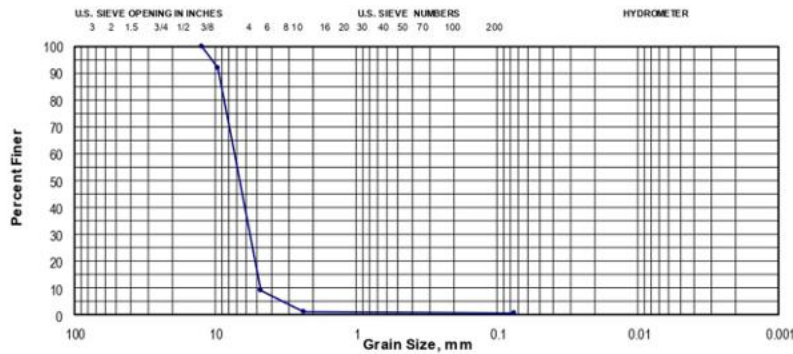
PO BOX 133622 - Tel.: (012) 697 0081
Jeddah 21382 - Fax.: (012) 257 4907
Saudi Arabia - E-mail.: fsjeddah@fugro-suhaimi.com



TL-1301

PARTICLE SIZE ANALYSIS OF COARSE AGGREGATE - TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee AlTashied For Industry Company	Job No.	244000
Location	Jeddah KSA	Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00241
Source / Location	RTCO	RFI #	Not Provided
Material	3/8" Aggregate	Test Date	02-Feb-2026
Client Contact	Mr. Yasir Nazir / Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan / Method	ASTM C 136



Sieve Size	Percent Passing	*Specification	Properties Tested	Test Result	*Spec
1/2" (12.5 mm)	100	-	-	-	-
3/8" (9.50 mm)	92	-	Material finer than 75 micron (No. 200), %	0.5	-
No.4 (4.75 mm)	9	-	-	-	-
No.8 (2.36 mm)	1	-	-	-	-
No.200 (0.075 mm)	0.5	-	-	-	-

Remarks	The test result relate only to the items tested.
Tested by:	Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.06B Issue. 01 Rev. 01 Date: 06 December 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السحيمى - فغرو
FUGRO - Suhaimi

Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail.: fsjeddah@fugro-suhaimi.com

PHYSICAL AND CHEMICAL ANALYSES OF COARSE AGGREGATE-TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee AlTashied For Industry Company	Job No.	244000
		Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00242
Source Location	RTCO Concrete Batch Plant Jeddah	Test Date	04-Feb-2026
Client Contact	Mr. Yasir Nazir /Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan/ Test Method	ASTM D75 As mentioned below

Page. 01 of 02

1.	Sieve Analysis (ASTM C-136)	Percent Passing by weight.	
	Sieve size	Single Sized Aggregate (Nominal Max. Size : 3/8")	
	1/2" (12.5 mm)	100	
	3/8" (9.5 mm)	92	
	No.4 (4.75 mm)	9	
	No.8 (2.36 mm)	1	
	No.200 (0.075 mm)	0.5	
		TEST RESULTS	PROJECT SPECIFICATION
2.	Material Finer than No.200 Sieve, (ASTM C-117).	3/8" Coarse Aggregate	**ASTM C-33 Specification, Limits
	Material Finer than No.200 (0.075 mm) Sieve, % by Weight	0.5	1.0 (Max.)
3.	Soundness, (ASTM C-88).		
	Percent Loss at 5 Cycles using Saturated Solution of Magnesium Sulfate	5	18.0 (Max.)
4.	Clay Lumps and Friable Particles, (ASTM C-142).		
	Clay Lumps and Friable Particles, % by weight	0.51	3.0 (Max.)
5.	Los Angeles Abrasion, (ASTM C-131).		
	GRADING	B	-
	Percent Loss at 100 Revolutions	4.9	-
	Percent Loss at 500 Revolutions	23.9	50 (Max.)
	Ratio of Abrasion Loss at 100 & 500 Revolutions (100/500 Revolution value)	0.21	-

(Cont...Next Page)

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.15 Issue. 01 Rev. 03 Date: 01 May 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

*** The PDF document is electronically generated and digitally signed ***

المستفيد من - فيس فو
FUGRO - Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail.: fsjeddah@fugro-suhaimi.com

TL-1301

JD-CMT-MO-26-00063

Page. 02 of 02

	TEST RESULTS	PROJECT SPECIFICATION
	3/8" Coarse Aggregate	**ASTM C-33 Specification, Limits
6. Specific Gravity and Absorption, (ASTM-127)		
Bulk Specific Gravity, (Dry)	2.761	-
Bulk Specific Gravity, (SSD)	2.784	-
Apparent Specific Gravity	2.824	-
Absorption, % by weight	0.81	-
7. Flakiness and Elongation Index (BS 812 – Part 105:1990)		
Flakiness Index	14	
Elongation Index	17	
8. Lightweight Particles (ASTM C-123)		
Coal and Lignite, % by weight	Nil (0)	0.5 (Max.)
9. Moisture Contents, (ASTM C-566)		
T otal Moisture Content of Aggregate Percent	0.3	
10. Unit Weight of Aggregate (ASTM C-29)		
Unit Weight Dry Loose, Kg/m ³	1459	-
Unit Weight Dry Rodded, Kg/m ³	1589	-

**ASTM C-33 “Standard Specification for Concrete Aggregates”.

Conclusion : The sand sample tested **conforms** to the indicated test requirement limits of ASTM C-33.

The course aggregate is considered **acceptable** to be used for concrete production.

Remarks The test result relate only to the items tested.

Tested by: Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.15 Issue. 01 Rev. 03 Date: 01 May 2021

Page 2 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

السويديت - فوجرو
FUGRO-Suhaimi

- End of Report - *** The PDF document is electronically generated and digitally signed ***



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

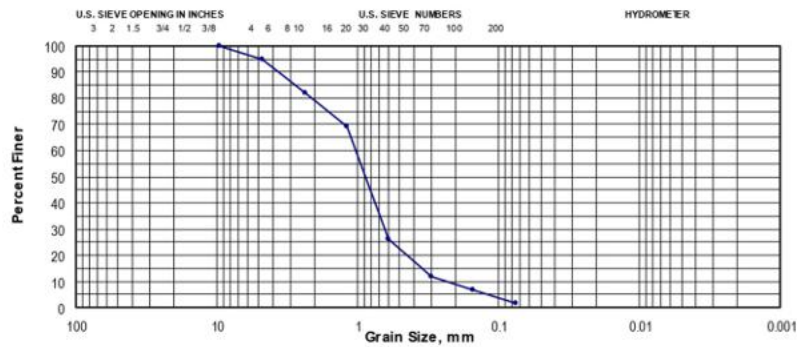
PO BOX 133622 - Tel.: (012) 697 0081
Jeddah 21382 - Fax.: (012) 257 4907
Saudi Arabia - E-mail.: fsjeddah@fugro-suhaimi.com



TL-1301

PARTICLE SIZE ANALYSIS OF NATURAL COURSE SAND - TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee Altashied For Industry Company	Job No.	244000
Location	Jeddah KSA	Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00243
Source / Location	RTCO	RFI #	Not Provided
Material	Natural Course Sand	Test Date	02-Feb-2026
Client Contact	Mr. Yasir Nazir / Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan / Method	ASTM C 136



Sieve Size	Percent Passing	*Specification	Properties Tested	Test Result	*Spec
3/8" (9.50 mm)	100	100	-	-	-
No.4 (4.75 mm)	95	95-100	Material finer than 75 micron (No. 200), %	1.8	-
No.8 (2.36 mm)	82	80-100	-	-	-
No.16 (1.18 mm)	69	50-85	-	-	-
No.30 (0.600 mm)	26	25-60	-	-	-
No.50 (0.300 mm)	12	5-30	-	-	-
No.100 (0.150 mm)	7	0-10	-	-	-
No.200 (0.075 mm)	1.8	0-3	-	-	-

Remarks	The test result relate only to the items tested.
Tested by:	Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.06B Issue. 01 Rev. 01 Date: 06 December 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السحيميت - فيغرو
fugro - Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail.: fslieddah@fugro-suhaimi.com

TL 1301

PHYSICAL ANALYSES OF NATURAL COURSE SAND AGGREGATE - TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee Altashied For Industry Company	Job No.	244000
		Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00244
Source Location	RTCO Concrete Batch Plant Jeddah	Test Date	04-Feb-2026
Client Contact	Mr. Yasir Nazir /Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan/ Test Method	ASTM D75 As mentioned below

Page. 01 of 02

1.	Sieve Analysis (ASTM C-136).	TEST RESULTS	*ASTM C-33 Specification, Limits
		Percent Passing by Weight	
	3/8" (9.5 mm)	100	100
	No.4 (4.75 mm)	95	95 – 100
	No.8 (2.36 mm)	82	80 – 100
	No.16 (1.18 mm)	69	50 – 85
	No.30 (0.600 mm)	26	25 – 60
	No.50 (0.300 mm)	12	05 – 30
	No.100 (0.150 mm)	7	0 – 10
Fineness Modulus → 3.1			2.3 (Min.) 3.1 (Max.)
2.	Material Finer than No. 200 Sieve, (ASTM C-117).	TEST RESULTS	*ASTM C-33 Specification, Limits
	Material Finer than No.200 (0.075 mm) sieve, % by weight	1.8	+ 5.0 (Max.) ++ 3.0 (Max.)
+For concrete not subject to abrasion, ++For concrete subject to abrasion.			
3	Clay Lumps and Friable Particles, (ASTM C-142).		
	Clay Lumps and Friable Particles, % by weight	0.5	3.0 (Max.)
4.	Lightweight Particles (ASTM C-123)		
	Chert, % by weight	Nil	3.0 (Max.)
	Coal and Lignite , % by weight	Nil	1.0 (Max.)
5.	Organic Impurities (ASTM C-40).		
	Organic Impurities	Color lighter than the Organic Plate No.3 (Standard) Free of injurious organic compound.	Lighter than the Organic Plate No.3 (Standard).

(Cont....Next Page).

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.15 Issue. 01 Rev.03 Date: 01 May 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

*** The PDF document is electronically generated and digitally signed ***

السحيمى - فينغرو
FUGRO-Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail.: fsjeddah@fugro-suhaimi.com

JD-CMT-MO-26-00063

Page. 02 of 02

	TEST RESULTS	SPECIFICATION
6. Soundness, (ASTM C-88).	Natural Course Sand	*ASTM C-33 Specification, Limits
Percent Loss at 5 cycles using Saturated Solution of Magnesium Sulfate	6	15.0 (Max.)
7. Specific Gravity and Absorption, (ASTM C-128).		
Bulk Specific Gravity, (Dry)	2.596	-
Bulk Specific Gravity, (SSD)	2.620	-
Apparent Specific Gravity	2.660	-
Absorption, % by weight	0.93	-
8. Moisture Contents, (ASTM C-566)		
Total Moisture Content of Aggregate Percent	0.5	-
9. Sand Equivalent (ASTM D2419)		
Sand Equivalent	78	-

**ASTM C-33 “Standard Specification for Concrete Aggregates”.

Conclusion : The sand sample tested **conforms** to the indicated test requirement limits of ASTM C-33. The fine aggregate is considered **acceptable** to be used for concrete production.

Remarks The test result relate only to the items tested.

Tested by: Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.15 Issue. 01 Rev. 03 Date: 01 May 2021

Page 2 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السحيمي - فينغرو
FUGRO-Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

PO BOX 133622 - Tel.: (012) 697 0081

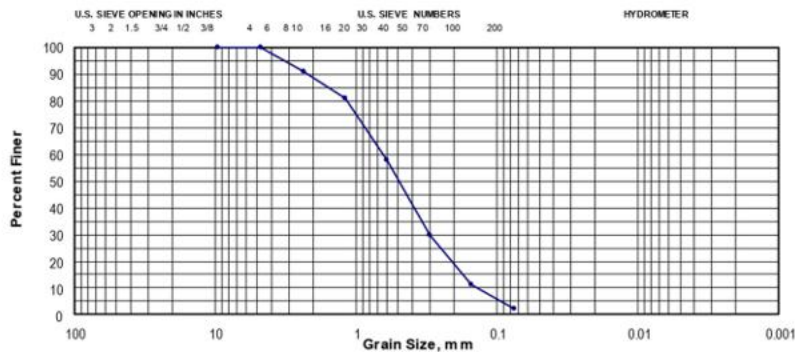
Jeddah 21382 - Fax.: (012) 257 4907

Saudi Arabia - E-mail.: fsljeddah@fugro-suhaimi.com

TL-1301

PARTICLE SIZE ANALYSIS OF NATURAL FINE SAND AGGREGATE - TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee AlTashied For Industry Company	Job No.	244000
Location	Jeddah KSA	Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00245
Source / Location	RTCO	RFI #	Not Provided
Material	Natural Fine Sand	Test Date	02-Feb-2026
Client Contact	Mr. Yasir Nazir /Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan / Method	ASTM C 136



Sieve Size	Percent Passing	*Specification	Properties Tested	Test Result	*Spec
3/8" (9.50 mm)	100	100	-	-	-
No.4 (4.75 mm)	100	95-100	Material finer than 75 micron (No. 200), %	2.4	-
No.8 (2.36 mm)	91	80-100	-	-	-
No.16 (1.18 mm)	81	50-85	-	-	-
No.30 (0.600 mm)	58	25-60	-	-	-
No.50 (0.300 mm)	30	5-30	-	-	-
No.100 (0.150 mm)	11	0-10	-	-	-
No.200 (0.075 mm)	2.4	0-3	-	-	-

Remarks: The test result relate only to the items tested.

Tested by: Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company

Form No. MAT.4.06B

Issue. 01

Rev. 01

Date: 06 December 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السيد فوجرو - سهايمي

FUGRO - Suhaimi

Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail.: fsjeddah@fugro-suhaimi.com
PHYSICAL ANALYSES OF NATURAL FINE SAND-TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee Altashied For Industry Company	Job No.	244000
		Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00246
Source Location	RTCO Concrete Batch Plant Jeddah	Test Date	04-Feb-2026
Client Contact	Mr. Yasir Nazir /Mobile:- 0580021806 / Email:- Yasir.nazir@rtmix.co	Sampling plan/ Test Method	ASTM D75 As mentioned below

Page. 01 of 02

1.	Sieve Analysis (ASTM C-136).	TEST results	*ASTM C-33 Specification, Limits
		Percent Passing by Weight	
	3/8" (9.5 mm)	100	100
	No.4 (4.75 mm)	100	95 – 100
	No.8 (2.36 mm)	91	80 – 100
	No.16 (1.18 mm)	81	50 – 85
	No.30 (0.600 mm)	58	25 – 60
	No.50 (0.300 mm)	30	05 – 30
	No.100 (0.150 mm)	11	0 – 10
Fineness Modulus → 2.3			2.3 (Min.) 3.1 (Max.)
2.	Material Finer than No. 200 Sieve, (ASTM C-117).	TEST RESULTS	*ASTM C-33 Specification, Limits
	Material Finer than No.200 (0.075 mm) sieve, % by weight	2.4	+ 5.0 (Max.) ++ 3.0 (Max.)
	+For concrete not subject to abrasion, ++For concrete subject to abrasion.		
3	Clay Lumps and Friable Particles, (ASTM C-142).		
	Clay Lumps and Friable Particles, % by weight	0.4	3.0 (Max.)
4.	Lightweight Particles (ASTM C-123)		
	Chert, % by weight	Nil	3.0 (Max.)
	Coal and Lignite , % by weight	Nil	1.0 (Max.)
5.	Organic Impurities (ASTM C-40).		
	Organic Impurities	Color lighter than the Organic Plate No.3 (Standard) Free of injurious organic compound.	Lighter than the Organic Plate No.3 (Standard).

(Cont....Next Page).

Checked By: Muhammad Amir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.15 Issue. 01 Rev. 03 Date: 01 May 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

*** The PDF document is electronically generated and digitally signed ***

السحيمى - فيشرو
FUGRO - Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

P.O Box 133622 – Tel.: (012) 697 0081

Jeddah 21382 – Fax.: (012) 257 4907

Saudi Arabia – E-mail.: fsjeddah@fugro-suhaimi.com

JD-CMT-MO-26-00063

Page. 02 of 02

	TEST RESULTS	SPECIFICATION
6. Soundness, (ASTM C-88).	Natural Fine Sand	*ASTM C-33 Specification, Limits
Percent Loss at 5 cycles using Saturated Solution of Magnesium Sulfate	6	15.0 (Max.)
7. Specific Gravity and Absorption, (ASTM C-128).		
Bulk Specific Gravity, (Dry)	2.563	-
Bulk Specific Gravity, (SSD)	2.584	-
Apparent Specific Gravity	2.618	-
Absorption, % by weight	0.83	-
8. Moisture Contents, (ASTM C-566)		
Total Moisture Content of Aggregate Percent	0.6	-
9. Sand Equivalent (ASTM D2419)		
Sand Equivalent	80	-

**ASTM C-33 "Standard Specification for Concrete Aggregates".

Conclusion : The sand sample tested **conforms** to the indicated test requirement limits of ASTM C-33. The fine aggregate is considered **acceptable** to be used for concrete production.

Remark The test result relate only to the items tested.

Tested by: Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022







The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.15 Issue. 01 Rev. 03 Date: 01 May 2021

Page 2 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السيد - فغرو
FUGRO-Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI LTD.

PO BOX 133622 - Tel.: (012) 697 0081

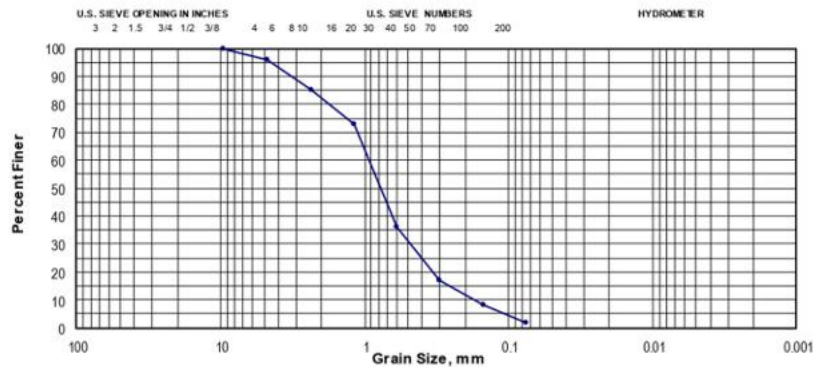
Jeddah 21382 - Fax.: (012) 257 4907

Saudi Arabia - E-mail: fsljeddah@fugro-suhaimi.com

TL-1301

PARTICLE SIZE ANALYSIS OF NATURAL COURSE SAND AND NATURAL FINE SAND COMBINED AGGREGATE - TEST REPORT

Client	Rawee Al Tashied for Industry Co.	Report Date	10-Feb-2026
Project	Rawee Altashied For Industry Company	Job No.	244000
Location	Jeddah KSA	Order No.	JD-CMT-MO-26-00063
Sampled by	Client on 1 st February 2026	Report No.	JD-CMT-MR-26-00280
Source / Location	RTCO	RFI #	Not Provided
Material	Combined Sand	Test Date	02-Feb-2026
Client Contact	Mr. Yasir Nazir /Mobile:- 0580021806 /Email:- Yasir.nazir@rtmix.co	Sampling plan / Method	ASTM C 136



Sieve Size	Percent Passing	*Specification	Properties Tested	Test Result	*Spec
3/8" (9.50 mm)	100	100	Natural Course Sand	70%	
No.4 (4.75 mm)	96	95-100	Natural Fine Sand	30%	-
No.8 (2.36 mm)	85	80-100	-	-	-
No.16 (1.18 mm)	73	50-85	-	-	-
No.30 (0.600 mm)	36	25-60	-	-	-
No.50 (0.300 mm)	17	5-30	-	-	-
No.100 (0.150 mm)	8	0-10	-	-	-
No.200 (0.075 mm)	2	0-3	Fineness Modulus	2.9	2.3 (Min.) 3.1 (Max.)

Remarks

Conclusion : The gradation of crushed sand and fine sand combination 30% and 70 % combine grading as meet with project specification requirement.
The fine aggregate is considered **acceptable** to be used for concrete production.
The test result relate only to the items tested.

Tested by: Dilawar

Checked By: Muhammad Aamir-JCC#80023864

Approved By: Irfan Khan-JCC#80024022



Accepted



Accepted



The copyright of document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
Form No. MAT.4.06B Issue. 01 Rev. 01 Date: 06 December 2021

Page 1 of 1 This document is uncontrolled once printed or downloaded and may not reflect the latest version

- End of Report - *** The PDF document is electronically generated and digitally signed ***

السيد فهد - فهد
FUGRO - Suhaimi



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI COMPANY LTD.
 Lot # 012, Block # 03, P.O. Box. 31720
 Hail Al-Mehar, Shareh Nahawand
 Royal Commission, Madinat Yanbu Al-Sinaiyah, KSA
 Saudi Arabia - E-mail : fslyanbu@fugro-suhaimi.com
 Fax. : (014) 321 0963 Tel. : (014) 396 2173



السحيمي - فيغرو
FUGRO - Suhaimi

TEST REPORT FOR CHEMICAL ANALYSIS OF AGGREGATES

Client	Rawee Altashied For Industry Company	Order No.	YNB-CHEM-O-26-00089
Project	Construction Materials Testing Seives	Report No.	YNB-CHEM-R-26-00129
Sample Description	3/4 Aggregate Sample (0063/1)	Date Reported	11-Feb-2026
Source	RTCO Concrete Batch Plant	Date Tested	09-Feb-2026
Sampling Date	01-Feb-2026	Lab No.	YNB-CHEM-S-26-00247/1
Sample Location	RTCO CBP - Jeddah	Job No.	244000
Reported By	Arnel Malicsi	Sample Received Date	05-Feb-2026
Tested By	Munilal/AMM	Sampled By	Client's Rep.
Client Contact	Yasir	Sampling Plan/Method	By Client

Fugro-Suhaimi Co. Ltd. (FSCL) pleased to submit this test report on aggregate sample to determine the following parameters as requested. The testing was carried out in accordance with the relevant standard methods. The results and pertinent information are as follows:

Serial No	Determinations	Unit	Method	Results
1.0	Acid Soluble Chloride as Cl, (% by weight)	%	BS 812 Part 117	<0.01
2.0	Acid Soluble Sulfate as SO ₃ , (% by weight)	%	BS 812 Part 118	0.08
3.0	Potential Alkali Reactivity			
3.1	Dissolved Silica	mmol/L	ASTM C289	17.5
3.2	Reduction in Alkalinity	mmol/L	ASTM C289	96.8

Note: The test results given above apply only to samples tested and information in above table is sole responsibility of FSCL Chemical Laboratory.

Remarks: Based on the interpretation of the test results obtained by this method (ASTM C289), the sand sample is considered **innocuous**.

-End Of Report-

ISO 17025:2017 Accredited Laboratory.



Checked By: AbdulRazzaq



Approved By: Arnel Malicsi



FSL-QAS-CHE-111

Rev. 4

Date: 01 July 2022

The copyright of this document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from company
 A member of the Fugro group of companies with offices worldwide



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI COMPANY LTD.
 Lot # 012, Block # 03, P.O. Box. 31720
 Hail Al-Mehan, Shareh Nahawand
 Royal Commission, Madinat Yanbu Al-Sinaiyah, KSA
 Saudi Arabia – E-mail : fslyanbu@fugro-suhaimi.com
 Fax. : (014) 321 0963 Tel. : (014) 396 2173



السحيمي - فيغرو
FUGRO - Suhaimi

TEST REPORT FOR CHEMICAL ANALYSIS OF AGGREGATES

Client	Rawee Altashied For Industry Company	Order No.	YNB-CHEM-O-26-00089
Project	Construction Materials Testing Sevice	Report No.	YNB-CHEM-R-26-00129
Sample Description	3/4 Aggregate Sample (0063/1)	Date Reported	11-Feb-2026
Source	RTCO Concrete Batch Plant	Date Tested	09-Feb-2026
Sampling Date	01-Feb-2026	Lab No.	YNB-CHEM-S-26-00247/2
Sample Location	RTCO CBP - Jeddah	Job No.	244000
Reported By	Arnel Malicsi	Sample Received Date	05-Feb-2026
Tested By	Munilal/AMM	Sampled By	Client's Rep.
Client Contact	Yasir	Sampling Plan/Method	By Client

Fugro-Suhaimi Co. Ltd. (FSCL) pleased to submit this test report on aggregate sample to determine the following parameters as requested. The testing was carried out in accordance with the relevant standard methods. The results and pertinent information are as follows:

Serial No	Determinations	Unit	Method	Results
1.0	Acid Soluble Chloride as Cl, (% by weight)	%	BS 812 Part 117	<0.01
2.0	Acid Soluble Sulfate as SO ₃ , (% by weight)	%	BS 812 Part 118	0.06
3.0	Potential Alkali Reactivity			
3.1	Dissolved Silica	mmol/L	ASTM C289	18.7
3.2	Reduction in Alkalinity	mmol/L	ASTM C289	80.1

Note: The test results given above apply only to samples tested and information in above table is sole responsibility of FSCL Chemical Laboratory.

Remarks: Based on the interpretation of the test results obtained by this method (ASTM C289), the sand sample is considered **innocuous**.

-End Of Report-

ISO 17025:2017 Accredited Laboratory.



Checked By: AbdulRazaq



Approved By: Arnel Malicsi



FSL-QAS-CHE-111

Rev. 4

Date: 01 July 2022

The copyright of this document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from company
 A member of the Fugro group of companies with offices worldwide



*** The PDF document is electronically generated and digitally signed ***



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI COMPANY LTD.
 Lot # 012, Block # 03, P.O. Box. 31720
 Hail Al-Mehan, Shareh Nahawand
 Royal Commission, Madinat Yanbu Al-Sinaiyah, KSA
 Saudi Arabia – E-mail : fslyanbu@fugro-suhaimi.com
 Fax. : (014) 321 0963 Tel. : (014) 396 2173



السحيمي - فيغرو
FUGRO - Suhaimi

TEST REPORT FOR CHEMICAL ANALYSIS OF AGGREGATES

Client	Rawae AlTashied For Industry Company	Order No.	YNB-CHEM-O-26-00089
Project	Construction Materials Testing Seives	Report No.	YNB-CHEM-R-26-00129
Sample Description	Natural Coarse Sand (0063/3)	Date Reported	11-Feb-2026
Source	RTCO Concrete Batch Plant	Date Tested	09-Feb-2026
Sampling Date	01-Feb-2026	Lab No.	YNB-CHEM-S-26-00247/3
Sample Location	RTCO CBP - Jeddah	Job No.	244000
Reported By	Arnel Malicsi	Sample Received Date	05-Feb-2026
Tested By	Munilal/AMM	Sampled By	Client's Rep.
Client Contact	Yasir	Sampling Plan/Method	By Client

Fugro-Suhaimi Co. Ltd. (FSCL) pleased to submit this test report on aggregate sample to determine the following parameters as requested. The testing was carried out in accordance with the relevant standard methods. The results and pertinent information are as follows:

Serial No	Determinations	Unit	Method	Results
1.0	Acid Soluble Chloride as Cl, (% by weight)	%	BS 812 Part 117	<0.01
2.0	Acid Soluble Sulfate as SO ₃ , (% by weight)	%	BS 812 Part 118	0.07
3.0	Potential Alkali Reactivity			
3.1	Dissolved Silica	mmol/L	ASTM C289	19.5
3.2	Reduction in Alkalinity	mmol/L	ASTM C289	96.8
4.0	Organic Impurities	-	*ASTM C40	Color Lighter than the Organic Plate No. 3 (Standard) Free of injurious organic compound

Note: The test results given above apply only to samples tested and information in above table is sole responsibility of FSCL Chemical Laboratory.

*Not included in the ISO 17025:2017 scope.

Remarks: Based on the interpretation of the test results obtained by this method (ASTM C289), the sand sample is considered innocuous.

-End Of Report-

ISO 17025:2017 Accredited Laboratory.



Checked By: AbdulRazzaq

FSL-QAS-CHE-111

Rev. 4 Date: 01 July 2022 .



Approved By: Arnel Malicsi



The copyright of this document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from company
 A member of the Fugro group of companies with offices worldwide



*** The PDF document is electronically generated and digitally signed ***



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI COMPANY LTD.
 Lot # 012, Block # 03, P.O. Box. 31720
 Hail Al-Mehar, Shareh Nahawand
 Royal Commission, Madinat Yanbu Al-Sinaiyah, KSA
 Saudi Arabia – E-mail : fslyanbu@fugro-suhaimi.com
 Fax. : (014) 321 0963 Tel. : (014) 396 2173



السحيمي - فيغرو
FUGRO - Suhaimi

TEST REPORT FOR CHEMICAL ANALYSIS OF AGGREGATES

Client	Rawee AlTashied For Industry Company	Order No.	YNB-CHEM-O-26-00089
Project	Construction Materials Testing Sevice	Report No.	YNB-CHEM-R-26-00129
Sample Description	Natural Fine Sand (0063/4)	Date Reported	11-Feb-2026
Source	RTCO Concrete Batch Plant	Date Tested	09-Feb-2026
Sampling Date	01-Feb-2026	Lab No.	YNB-CHEM-S-26-00247/4
Sample Location	RTCO CBP - Jeddah	Job No.	244000
Reported By	Arnel Malicsi	Sample Received Date	05-Feb-2026
Tested By	Munilal/AMM	Sampled By	Client's Rep.
Client Contact	Yasir	Sampling Plan/Method	By Client

Fugro-Suhaimi Co. Ltd. (FSCL) pleased to submit this test report on aggregate sample to determine the following parameters as requested. The testing was carried out in accordance with the relevant standard methods. The results and pertinent information are as follows:

Serial No	Determinations	Unit	Method	Results
1.0	Acid Soluble Chloride as Cl, (% by weight)	%	BS 812 Part 117	<0.01
2.0	Acid Soluble Sulfate as SO ₃ , (% by weight)	%	BS 812 Part 118	0.09
3.0	Potential Alkali Reactivity			
3.1	Dissolved Silica	mmol/L	ASTM C289	18.5
3.2	Reduction in Alkalinity	mmol/L	ASTM C289	91.4
3.0	Organic Impurities	-	*ASTM C40	Color Lighter than the Organic Plate No. 3 (Standard) Free of injurious organic compound

Note: The test results given above apply only to samples tested and information in above table is sole responsibility of FSCL Chemical Laboratory.

*Not included in the ISO 17025:2017 scope.

Remarks: Based on the interpretation of the test results obtained by this method (ASTM C289), the sand sample is considered innocuous.

-End Of Report-

ISO 17025:2017 Accredited Laboratory.



Checked By: AbdulRazaq

FSL-QAS-CHE-111

Rev. 4 Date: 01 July 2022 .



Approved By: Arnel Malicsi



The copyright of this document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from company
 A member of the Fugro group of companies with offices worldwide

*** The PDF document is electronically generated and digitally signed ***



Quality Test Reports of Raw Materials

FUGRO-SUHAIMI COMPANY LTD.

Lot # 012, Block # 03, P.O. Box. 31720
Haili Al-Mehan, Shareh Nahawand
Royal Commission, Madinat Yanbu Al-Sinayah, KSA
Saudi Arabia - E-mail : fslyanbu@fugro-suhaimi.com
Fax. : (014) 321 0963 Tel. : (014) 396 2173



السحيمي - فيغرو
FUGRO - Suhaimi

TEST REPORT OF CHEMICAL ANALYSIS ON WATER

Client	Rawee Altashied For Industry Company	Order No.	YNB-CHEM-O-26-00089
Project	Construction Materials Testing Seives	Report No.	YNB-CHEM-R-26-00130
Sample Description	Water	Date Reported	10-Feb-2026
Source	RTCO Concrete Batch Plant	Date Tested	08-Feb-2026
Sampling Date	01-Feb-2026	Sample Received Date	05-Feb-2026
Sample Location	RTCO CBP - Jeddah	Job No.	244000
Reported By	Arnel Malicsi	Sample No.	YNB-CHEM-S-26-00251
Tested By	ABDUL RAZZAQ	Sampled By	CLIENT'S REP.
Client Contact	Yasir	Sampling Plan/Method	By Client

Fugro-Suhaimi Company Ltd. (FSCL) has performed standard chemical analysis on the water sample to determine the following parameters as requested. The testing was carried out in accordance with the relevant ASTM and AWWA/ APHA Standard Methods. The test results and pertinent information are as follows:

Serial No.	Determination	Unit	Method	Test Results
1.0	pH Value at 25.0 °C	-	ASTM D1293	7.29
2.0	Chloride, Cl ⁻	mg/L	ASTM D512	184
3.0	Sulphate, SO ₄ ²⁻	mg/L	ASTM D516	4
4.0	Total Dissolved Solids, TDS,	mg/L	ASTM D5907	420
5.0	Magnesium, Mg	mg/L	ASTM D511	2.5

Note: The test results given above apply only to samples tested and information in above table is sole responsibility of FSCL Chemical Laboratory.

Remarks: The appearance of the water sample was clear and free from oils, acids and organic matter contamination.

-End Of Report-

ISO 17025:2017 Accredited Laboratory



Checked By: AbdulRazzaq



Approved By: Arnel Malicsi



FSL-QAS-CHE-102

Rev. 4

Date: 01 July 2022 .

The copyright of this document is owned by Fugro-Suhaimi Ltd. It may not be reproduced except with prior written approval from the company
A member of the Fugro group of companies with offices worldwide

*** The PDF document is electronically generated and digitally signed ***



Quality Policy Of Company

بسم الله الرحمن الرحيم



شركة روائع التشييد للتصنيع

سياسة الجودة - Quality Policy

ان الإدارة العليا والموظفين بشركة روائع التشييد للصناعة (رتكو) يدركون مسؤولياتهم والتزاماتهم نحو الوصول الى مكانة مرموقة من خلال تقديم الخدمات المتميزة في مجال صناعة الخرسانة والبلوك , بطرق مهنية طبقا للمواصفات العالمية لتحقيق الرضاء التام للعملاء وتلبية خدماتهم.

يبدل جميع موظفين روائع التشييد للصناعة قصارى جهدهم لرفع كفاءة العمل لتحقيق رغبات وتوقعات العملاء وذلك من خلال تطبيق نظام الجودة وفقا للمواصفة العالمية (QMS ISO-9001:2015).

تدرك الإدارة مسؤولياتها نحو توفير بيئة العمل المناسبة والامنة والتي تتزامن مع رغبات العميل والمواصفات القياسية وذلك من خلال :

1. جعل العملاء هم الأساسى في محور اهتمامنا , والحرص على ارضائهم وتلبية توقعاتهم ومتطلباتهم.
2. تحديد القضايا الداخلية والخارجية المتعلقة بأنظمة الجودة وتحليل المخاطر والتي من الممكن أن تؤثر على الهيئة ومشاريعها.
3. الالتزام بكافة القوانين والتشريعات الخاصة بالجودة والالتزام بتطبيق الأساليب والاستراتيجيات اللازمة لعمليات التحسين المستمر.
4. الايمان بأهمية الموارد البشرية التي تمتلكها الشركة من الكفاءات والخبرات الفنية والإدارية المتميزة والاهتمام بتدريبهم والتوعية المستمرة لهم لتطبيق وصيانة نظام الجودة.
5. الالتزام بالتحسين المستمر بالشركة والمحافظة على التطوير باستمرار في كافة عملياتها وتعزيز نظام إدارة الجودة وضمان تنفيذه من خلال المراجعات الداخلية واتخاذ الإجراءات التصحيحية والوقائية.
6. مراجعة هذه السياسة وكذلك اهداف الجودة بشكل دوري خلال اجتماعات مراجعة الإدارة لنظام إدارة الجودة لضمان استمرارية ملاءمتها.

المدير التنفيذي




Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

QUALITY CONTROL MANUAL (LASTEST)

FOR

**RAWAEE ALTASHIED FOR INDUSTRY COMPANY
(RTCO)**

PREPARED BY	REVIEWED BY
YASIR NAZIR	FAHAD MUHAMMAD ALMOQABALA
MANAGEMENT REPRESENTATIVE / QC MANAGER	CHIEF EXECUTIVE OFFICER, CEO
	



Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

TABLE OF CONTENTS

	Page
1. Introduction.....	3
2. Basic Company Policies	4
2.1. Target Quality	4
2.2. Personnel Policies.....	4
2.3. Selection and Maintenance of Plant Equipment	4
2.4. Materials Selection	5
2.5. Within-Company Status of the Quality Control Organization.....	5
3. Scope of Quality Control Activities	5
4. Quality Control Organization and Staffing	6
4.1. The Basic Quality Service Unit.....	6
4.2. The Central Laboratory.....	6
4.3. The Quality Control Manager	6
5. Testing Equipment and Standards.....	7
5.1. Basic Quality Control Functions	7
5.1.1. Tests on Concrete.....	8
5.1.2. Tests on Aggregates	7
5.1.3. Tests on Water	9
5.1.4. Tests on Cement.....	9
5.2. Quality Control of Laboratory Operations.....	11
6. Communications	12
7. Personnel Training	13
8. Promotional Activities.....	13
9. Job Progress Communications.....	16

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

1. INTRODUCTION

In this age of high demands on quality and dependability of engineering materials and systems on the one hand, and the manufacturer's potential involvement in product liability on the other, well-developed quality control systems have become an indispensable part of doing business in many industries. In addition, ready mixed concrete involves a number of unique factors which require attention.

- (1) Ready mixed concrete is a processed but unfinished material at the time of delivery.
- (2) Quality and uniformity of concrete vary because of a large number of factors. Some are readily identified and controlled; others can be obscure and not so easily controlled.
- (3) The quality of the end product is affected by various factors at different phases of processing:
 - Selection and variability of ingredients;
 - Their proportions;
 - The thoroughness with which they are combined; and
 - Conditions, attendant to transportation, placement and protection of the concrete.
- (4) In its "as sold" condition, the product is perishable and will not remain in the plastic and unhardened condition beyond a limited time, the exact period depending upon circumstances.
- (5) Its ultimate quality, compressive strength, cannot be verified at the time of sale, in contrast to other materials. Steel, lumber, masonry units can all be tested before they are used. Only the ingredients of concrete can be tested in advance.
- (6) The product is subject to frequent testing by others. Negligence or individual interpretation of standard methods of testing occasionally results in a misrepresentation of the true quality of the product.
- (7) Whereas most manufacturing industries enjoy a high degree of standardization of their products, the ready mixed concrete industry is compelled to modify and adjust its product to a host of variables in response to real or perceived needs for the various uses of concrete in a project and to make efficient use of locally available raw materials.

In summary, the complexity of providing a quality product, and having it recognized and certified as such, presents the concrete producer with a fairly clear-cut decision. Use a comfortable safety factor regarding the strength of concrete, its major quality feature, and trust in good luck; or become committed to a well-organized quality control effort.

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

2. BASIC COMPANY POLICIES

Setting up a quality control organization is merely a part of company-wide quality decision. Obviously, hiring quality control personnel, purchasing the necessary equipment and implementation of a sampling and testing program do not necessarily assure production of quality concrete. These efforts might only serve to enlighten management on the current shortcomings of company operations and concrete production. Other decisions need to be made to make the quality control organization a worthwhile investment.

2.1 Target Quality

This involves a management commitment to the desired level of product quality. Apart from selection of cement content for the various strength classes of concrete, the decision-making process covers other important matters such as willingness to maintain product quality regardless of competitive pressures. Less important considerations include, for example, setting appropriate limits on the re-use of returned concrete.

2.2 Personnel Policies

Selection of qualified personnel for the operation of plants and truck mixers has a considerable bearing on production of concrete of dependable quality. Plant operators should be capable of operating with a minimum number of errors regardless of outside pressures. They should have the ability to comprehend the effects of various factors on concrete quality and be able to make the right decisions in problem situations. A higher than average degree of alertness, and concern for product quality, is required of truck mixer operators, particularly when working in dry-batch operations. It is their job to take the materials weighed into their units and produce well-mixed concrete. They should be able to use judgment in adjusting its consistency to fit the job specifications. On the job site they protect the company's interests by carefully recording additions of water and other materials to the concrete, and noting any observed malpractice in sampling, placing, handling, and testing. Good people must be attracted and trained to control concrete quality within their various job assignments. Training sessions and seminars are necessary to ensure that each person gets the information needed to perform his or her job effectively.

2.3 Selection and Maintenance of Plant Equipment

Investment in dependable plant equipment, including truck mixers, and appropriate replacement schedules, will govern the capability of an operation to consistently put out a quality product. Higher initial investment may pay off in the long run if it helps reduce or eliminate costly product failures. For example, automated batching controls will reduce the risk of mismatched loads. Complete physical separation and proper identification of cement and fly ash and other supplementary cementitious materials storage will prevent accidental leakage of fly ash into cement bins or errors when batching, and prevent the potentially disastrous effect on concrete performance.

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

2.4 Materials Selection

Selection of concrete materials strictly on the basis of economy and with disregard to evidence of variable or inferior quality may be counterproductive by tying up quality control personnel in time-consuming efforts to analyze the causes of resulting substandard or variable concrete performance. Poor quality cement may eventually turn out to produce

Highly variable concrete strengths; a fine aggregate subject to erratic changes in grading can cause unexplained water demand and result in strength fluctuations. While troubleshooting these problems, the unavailability of quality control personnel for other critical assignments is then liable to magnify the company's quality problems.

2.5 Within-Company Status of the Quality Control Organization

The person in charge of the quality control organization should be directly responsible to the general manager of the company or division of which it is a part. He or she implements management's decision on the quality level of the product; and reports, usually on a weekly basis, on product and production performance. He or she works with the production department to develop means of maintaining and improving the quality level and cost efficiency of production, and monitors their successful implementation. Quality control activities are coordinated with the production and sales departments. In turn, the quality control personnel depend on these departments for information that will result in an optimum contribution by the quality control organization to the company's business objectives. This communication becomes especially important when considering jobs with specifications using statistically-based acceptance criteria with penalty clauses since knowledge of the level of production variability is critical to the decision to bid.

3. THE SCOPE OF QUALITY CONTROL ACTIVITIES

"Quality Control" has become a convenient label for a number of functions which not only include the design and control of the company's product, but a number of activities only indirectly related to control of quality. Quality control activities usually include:

- Sampling and testing of concrete and concrete materials;
- Plant and field control of concrete production;
- Evaluation and procurement of new equipment and tools to improve quality;
- Concrete mixture optimization;
- Research and development testing;
- Specification review; evaluation of concrete performance; and
- Failure analysis and prevention.

Additionally, quality control functions may include personnel training, various promotional activities, and company representation in industry and professional groups.

Refer to Section 2 of the NRMCA Quality Control Manual for a detailed "Quality Control Check list" of potential activities.

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والانتاج

4. QUALITY CONTROL ORGANIZATION AND STAFFING

4.1 The Basic Quality Control Service Unit

Staffed by junior quality control technician(s). Control functions of this unit involve primarily the sampling and testing of concrete ingredients and concrete, and control of production at the plant and in the field. It may represent the entire quality control operation of a small company, or may be one of several in a multi-plant company. Some of its functions may be performed by a commercial laboratory, for example, the curing, capping, and testing of strength test specimens.

4.2 The Central Laboratory

Staffed by senior and junior quality control technician(s). The laboratory is usually under the supervision of an assistant quality control manager. It has testing facilities which permit a wide range of in-house testing of concrete and concrete materials. It may be equipped with some or all of the advanced testing capabilities listed in Section 5.2.

4.3 The Quality Control Manager

This person works to implement management's objectives concerning the desirable product quality within the overall quality commitment of the company. He or she establishes quality standards for concrete materials and sets up a quality control plan which specifies scope and frequency of sampling and testing. The QC Manager's assignments usually include

- review of project specifications and selection of job mixtures;
- preparation of concrete mix designs and other product information for approval by the building official or specifying agency;
- evaluation of concrete performance;
- product optimization;
- research and development testing;
- failure analysis and prevention;
- personnel training; and
- Advising on technical aspects of promotional activities.

In smaller companies, the functions of this position may be handled by various members of the management team, assisted by outside consultants or laboratories.

5. TESTING EQUIPMENT AND STANDARDS

5.1 Basic Quality Control Functions

The testing priorities of a ready mixed concrete producer's laboratory are primarily directed at those tests which are most important to the acceptance of the product by the customer. Capabilities for testing fresh concrete and the strength (and other properties) of hardened concrete are, therefore, a primary requirement, followed by certain tests for significant

Quality Plan of Company

RAWAEI ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

properties of aggregates and other concrete materials which have a bearing on concrete performance. Listed below is equipment required for basic quality control tests. Numbers in parentheses refer to applicable ASTM standard test methods. The information is limited to essential pieces of equipment for rough cost estimates.

INTERNAL LABORATORY TEST FACILITIES IN FACTORY

5.1.1 Tests on Concrete

S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Slump test of concrete	ASTM C143	Internal Lab	Upon each supply
2.	Compressive strength (7 & 28) days	ASTM C39	Internal Lab	Per day and Per 100 m ³
3.	Unit weight and Yield of Fresh concrete	ASTM C138, ASTM C29	Internal Lab	Weekly
4.	Concrete temperature	ASTM C1064	Internal Lab	Upon each supply
5.	Record of chilled Water & Curing Tank temperature	ASTM C192	Internal Lab	Daily
6.	Rebound hammer	ASTM C805	Internal Lab	As per demand

5.1.2 Tests on Concrete Masonry Units (Blocks)

S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Dimensions	ASTM C140 ,C90	Internal Lab	6 units shall be selected from each lot of 10 000 units
2.	Water Absorption & Density	ASTM C140 ,C90	Internal Lab	6 units shall be selected from each lot of 10 000 units
3.	Compressive Strength	ASTM C140 ,C90	Internal Lab	6 units shall be selected from each lot of 10 000 units

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

5.1 2. Tests on Aggregates

COARSE AGGREGATE				
S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Moisture Content	ASTM C566	Internal Lab	Daily and Each Supply from New Source
2.	Sieve Analysis	ASTM C136	Internal Lab	Weekly and Each Supply from New Source
3.	Material Finer Than #200 Sieve	ASTM C117	Internal Lab	Weekly and Each Supply from New Source
4.	Clay Lumps	ASTM C142	Internal Lab	Weekly and Each Supply from New Source
6.	Dry Rodded Unit Weight	ASTM C29	Internal Lab	Monthly and Each Supply from New Source
7.	Specific Gravity & Water Absorption	ASTM C127	Internal Lab	Monthly and Each Supply from New Source
8.	Los Angeles Abrasion Test	ASTM C131	Internal Lab	Monthly and Each Supply from New Source
9.	Flaky & Elongated Particles	ASTM D4791	Internal Lab	Monthly and Each Supply from New Source
10.	Soundness Test	ASTM C88	Internal Lab	Monthly and Each Supply from New Source
FINE AGGREGATE				
S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Moisture Content	ASTM C566	Internal Lab	Daily and Each Supply from New Source
2.	Sieve Analysis	ASTM C136	Internal Lab	Weekly and Each Supply from New Source

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

3.	Material Finer Than #200 Sieve	ASTM C117	Internal Lab	Daily and Each Supply from New Source
4.	Clay Lumps	ASTM C142	Internal Lab	Weekly and Each Supply from New Source
5.	Dry Rodded Unit Weight	ASTM C29	Internal Lab	Monthly and Each Supply from New Source
6.	Specific Gravity & Water Absorption	ASTM C127	Internal Lab	Monthly and Each Supply from New Source
7.	Sand Equivalent Test	ASTM D2419	Internal Lab	Daily and Each Supply from New Source
8.	Soundness Test	ASTM C88	Internal Lab	Monthly and Each Supply from New Source

5.1.3 Tests on Water

WATER				
S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	PH Value of water	ASTM D1293	Internal Lab	Weekly and Each Supply from New Source
2.	Total Dissolve Solid (TDS) water	ASTM C1603	Internal Lab	Weekly and Each Supply from New Source

5.1.4 Tests on Cement

CEMENT				
S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Time of setting by Vicat Needle	ASTM C191	Internal Lab	Monthly and Each Supply from New Source
2.	Normal consistency	ASTM C187	Internal Lab	Monthly and Each Supply from New Source

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

3.	Compressive strength of cement mortars	ASTM C109	Internal Lab	Monthly and Each Supply from New Source
4	Early stiffening of Portland cement (paste method)	ASTM C451	Internal Lab	Monthly and Each Supply from New Source
5	Finess of Cement by 0.075mm Sieve	AASHTO T128	Internal Lab	Monthly and Each Supply from New Source

EXTERNAL LABORATORY TESTS DETAILS

Tests on Concrete & Raw Materials

S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Air Content	ASTM C231	External Lab	As per client demand
COARSE AGGREGATE				
S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Moisture Content	ASTM C566	External Lab	Every 4 to 6 Months
2.	Sieve Analysis	ASTM C136	External Lab	Every 4 to 6 Months
3.	Material Finer Than #200 Sieve	ASTM C117	External Lab	Every 4 to 6 Months
4.	Clay Lumps	ASTM C142	External Lab	Every 4 to 6 Months
5.	Soluble Chlorides and Sulphate Test	BS EN1744-12390	External Lab	Every 4 to 6 Months
6.	Dry Rodded Unit Weight	ASTM C29	External Lab	Every 4 to 6 Months
7.	Specific Gravity & Water Absorption	ASTM C127	External Lab	Every 4 to 6 Months

Quality Plan of Company

RAWAEI ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

8.	Los Angeles Abrasion Test	ASTM C131	External Lab	Every 4 to 6 Months
9.	Flaky & Elongated Particles	ASTM D4791	External Lab	Every 4 to 6 Months
10.	Soundness Test	ASTM C88	External Lab	Every 4 to 6 Months
11.	Coal and Lignite	ASTM D388	External Lab	Every 4 to 6 Months
FINE AGGREGATE				
S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Moisture Content	ASTM C566	External Lab	Every 4 to 6 Months
2.	Sieve Analysis	ASTM C136	External Lab	Every 4 to 6 Months
3.	Material Finer Than #200 Sieve	ASTM C117	External Lab	Every 4 to 6 Months
4.	Clay Lumps	ASTM C142	External Lab	Every 4 to 6 Months
5.	Soluble Chlorides and Sulphate Test	BS EN1744-12390	External Lab	Every 4 to 6 Months
6.	Dry Rodded Unit Weight	ASTM C29	External Lab	Every 4 to 6 Months
7.	Specific Gravity & Water Absorption	ASTM C127	External Lab	Every 4 to 6 Months
8.	Sand Equivalent Test	ASTM D2419	External Lab	Every 4 to 6 Months
9.	Organic Impurities	ASTM C40	External Lab	Every 4 to 6 Months
10.	Coal and Lignite	ASTM D388	External Lab	Every 4 to 6 Months

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

11.	Soundness Test	ASTM C88	Internal Lab	Monthly and Each Supply from New Source
WATER				
S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	PH Value of water	ASTM D1293	External Lab	Every 4 to 6 Months
2.	Total Dissolve Solid (TDS) water	ASTM C1603	External Lab	Every 4 to 6 Months
3.	Chlorides and Sulphate Test	ASTM D512	External Lab	Every 4 to 6 Months

5.1.2 Tests on Concrete Masonry Units (Blocks)

S.NO	TYPE OF TEST	TEST METHOD	TEST FACILITY	PRIOD OF TEST
1.	Dimensions	ASTM C140 ,C90	Internal Lab	Every 4 to 6 Months
2.	Water Absorption & Density	ASTM C140 ,C90	Internal Lab	Every 4 to 6 Months
3.	Compressive Strength	ASTM C140 ,C90	Internal Lab	Every 4 to 6 Months

5.2 Quality Control of Laboratory Operations

A quality control operation represents a sound investment only if it generates reliable information. Erroneous test data may either produce a false sense of security, or lead to action inappropriate to the occasion, to the detriment of the producer's business. Testing errors are the result of incorrect testing procedures, mistakes in processing of samples and specimens, or equipment out of calibration. The following measures taken at regular intervals will help to control these potential causes of testing errors.

- (1) Quality control staff is examined for proficiency in test procedures. Results are recorded.
- (2) Verification that QC staffs are knowledgeable on quality limits and, when failures to meet these limits occur, respond with the proper action.

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

- (3) Audit procedures for identification and processing of specimens, and record-keeping Of results.
- (4) Within-test uniformity and uniformity of replicate tests on same sample are evaluated.
- (5) Reliability of strength test results on concrete is evaluated through comparison testing on same samples jointly with an outside laboratory.
- (6) Ensure that equipment is calibrated. Processing materials (including capping compound; cylinder molds; graded Ottawa sand; etc.) are checked for properties in conformance with applicable methods of test. A laboratory calibration manual is maintained in which calibration schedules are listed and results of calibrations, adjustments, and corrective actions are recorded.

5. COMMUNICATIONS

The usefulness of a quality control department depends to a large extent upon its participation in the flow of communications within the organization. In Appendix A, a communications model is presented which illustrates the desirable flow of communications involving the quality control organization at various phases of a project.

6. PERSONNEL TRAINING

The quality control department provides the producer with the technical and teaching resources for advancing the professionalism of other company personnel. A basic understanding of concrete technology and of the company's quality standards fosters personal involvement in product quality and will lead toward making the right decisions in problem situations. The qualification of quality control personnel for their teaching functions is built up through attendance at industry seminars and short courses, through a study of pertinent publications, and

Correlation of theoretical information with practical experience in the field. Training aids, either prepared in-house or obtained from outside sources, are used to lend substance to the training sessions and make them interesting. See Appendix B1 and B2 for information on the range of instruction subjects and on sources of training programs. The effectiveness of the training sessions is enhanced by scheduling a quiz at the end of each session. The prospect of a quiz will make for a more attentive audience; it will also provide a means for gauging the success of the teaching efforts.

7. PROMOTIONAL ACTIVITIES

The promotional value of a company's quality control operation can be more fully realized through its involvement in various activities such as

- (1) promoting the company's business by demonstrating a sound technical knowledge of the product;

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والإنتاج

(2) improving the handling by the customer, and the testing by others, of the company's concrete;

(3) Working toward a wider use of concrete by owners, designers, and builders.

8.1 Promoting the Company Business

- Presentation to customers of performance records on previous major or special projects, including records of dependable early strengths of concrete (as required in high-rise construction).
- Demonstration of the scope and qualifications of the company's quality control organization, including reference to its participation in inspection and accreditation programs of outside agencies.
- Documentation of plant and mixer inspection schedule and plant certification, if applicable.
- Assistance to customers toward cost efficiencies and quality improvements in placing and finishing concrete.
- Distribution of technical literature including NRMCA Concrete In Practice brochures and other publications with the company imprint, as applicable to various job situations.

8.2 Promoting Good Practices in Handling and Testing of Concrete

- In conjunction with other concrete producers, and with assistance from outside organizations, schedule seminars for local builders, contractors and concrete finishers in which the basics of quality concrete and proper practices for obtaining strong, durable and crack-free concrete are explained. Suitable subjects include: control of mix water content; importance of air-entrainment; cold and hot weather concreting; crack prevention in flatwork through correct joint design; and benefits of proper curing of concrete.
- Finishing demonstrations emphasizing the importance of correct timing of finishing operations.
- Demonstration with local testing agencies on correct testing practices and discussion of adverse effects of various improper testing procedures.

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والانتاج

8.3 Promoting Uses of Concrete and Realism in Concrete Specifications

- In presentations directed at owners, designers, and builders, and with engineering support from industry associations, explain the advantages and efficiencies of using concrete in various applications including tilt-up construction; city street and parking lot pavements; thermal insulation value due to concrete mass factor.
- Sponsor manufacturers' presentations on innovations in the use of various chemical and mineral admixture and benefits imparted to handling characteristics; hot weather
- Performance of concrete; and durability of concrete. In general, the versatility of concrete as construction materials should be demonstrated.
- Schedule panel discussions on realism in concrete specifications, including cost-effective use of local materials; need for appropriate tolerances in strength, slump and air-entrainment; reduction in job mix variables for optimum plant control of concrete; limitations of the water-cement ratio concept in mix design and field control of concrete; and sampling and testing of concrete – the right way.
- Suggest standard practices for ordering concrete which will help ensure that concrete of the proper quality level will be provided for typical local uses in commercial and residential construction.

Quality Plan of Company

RAWAEE ALTASHIED FOR INDUSTRY COMPANY(RTCO)		شركة روائع التشييد للصناعة (رتكو)
QUALITY MANAGEMENT SYSTEM(QMS-9001)		نظام إدارة الجودة (QMS 9001)
QUALITY AND PRODUCTION DEPARTMENT		إدارة الجودة والانتاج

8. Job Progress Communications

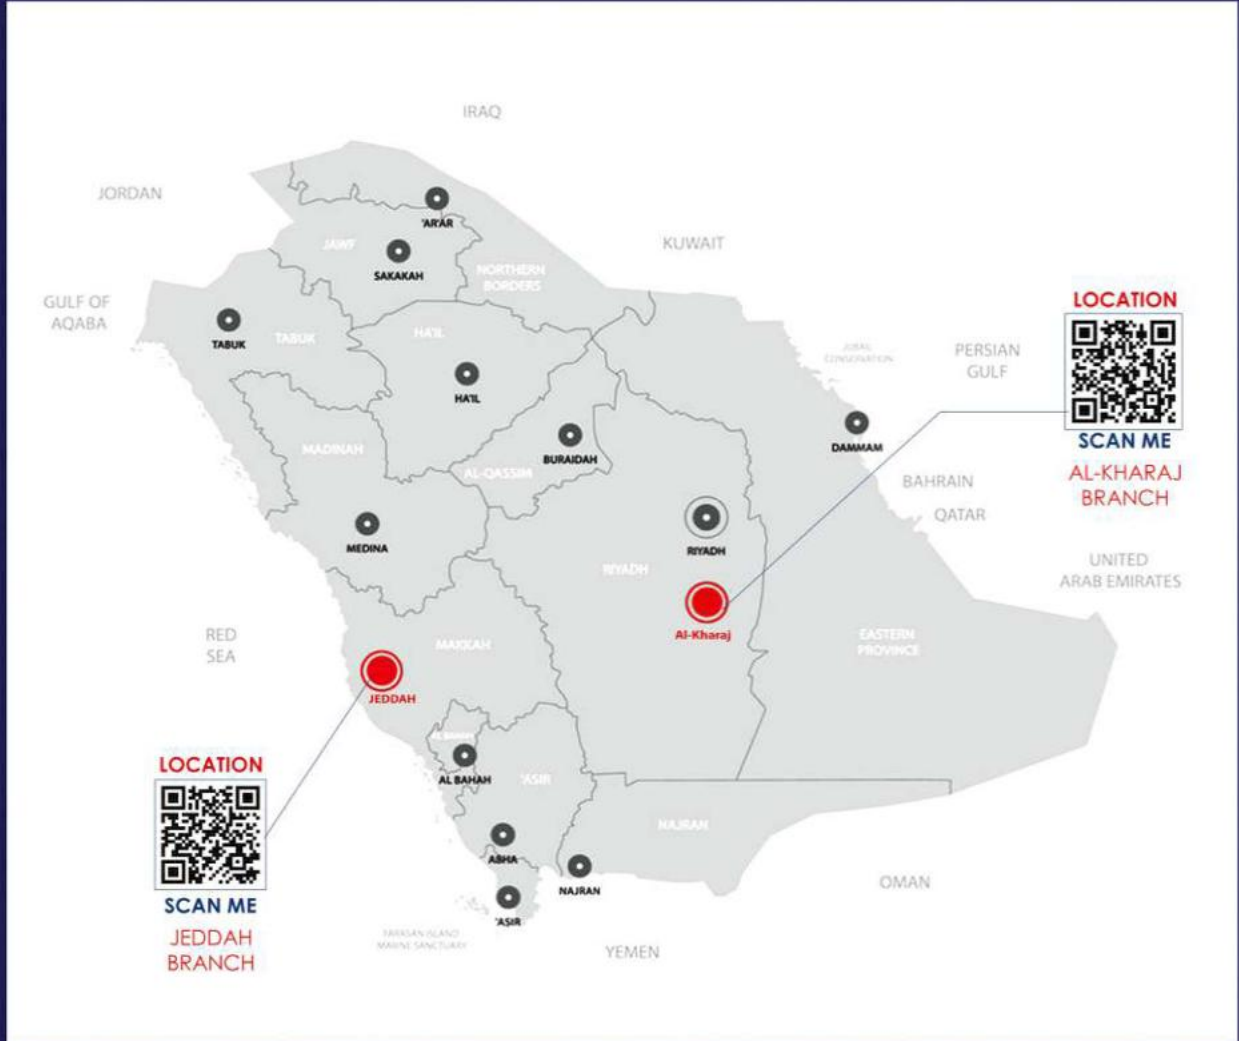
APPENDIX A

Subjects for Personnel Instruction

Quality Control Staff	
• Sampling and testing of concrete and concrete materials • Batch data preparation • Mix design Submission • Batch plant and mixer inspection • Quality limits and action on non-compliance • Investigation of abnormal test results (in-house and other) • Statistical evaluation of strength data • Communications with customers • Job site control functions • Slump control procedures	• Proportioning concrete mixes; trial batches • Laboratory procedures • Laboratory quality control • Trouble shooting and report writing • Schedule of testing and job priorities • Processing and filing of test reports • Specification review • Innovations in concrete technology • Safety procedures
Plant Operators • Basic concrete technology • Types of concrete and concrete materials • Aggregate moisture tests and adjustments • Effects of changes in materials (gradation; specific gravity) • Slump control procedures • Plant inspection (NRMCA Plant Check list) • Company policy on handling of returned concrete • Disposition of mismatched loads • Inventory taking and potential causes of inventory losses • Mechanics of scale train and other batching equipment • Yield adjustments on lightweight concrete • Quality control procedures by materials handlers • Response to rejection of concrete loads SEE NRMCA PLANT OPERATOR MANUAL	Truck Mixer Operators • Basic concrete technology • Types of concrete and concrete materials • Mixing requirements, initial and after water additions • Slump control procedures • Company policy on job site water additions • Mixer maintenance (NRMCA Plant Check list) • Testing methods and recognizing improper procedures • Company policies on handling of returned concrete of apparently mismatched loads • Correct practices in handling and finishing concrete • Handling of customer complaints about product quality • Response to rejection of concrete at the site SEE NRMCA TRUCK MIXER DRIVER'S MANUAL
Dispatcher/Office Personnel • Basic concrete technology • Types of concrete and concrete materials • Slump control procedures • Mix identification system • Handling of customer complaints and claims regarding product quality • Response to rejection of concrete at the site • Company policy on handling of returned concrete • Within-company communications	Sales Representatives • Basic concrete technology • Types of concrete and concrete materials • Mix identification system • Specification review • Handling of customer complaints and claims regarding product quality • Response to rejection of concrete at site • Testing methods and recognizing improper procedures • Within-company communications • Slump control procedures • Strength test reports and promotional use • Innovations in concrete technology - selling added value



شركة روائع التشييد للصناعة
Rawae AlTashied For Industry Co.



KINGDOM OF SAUDI ARABIA

RIYADH - AL KHARJ

HARAD ROAD

+966 11 542 1222 (Admin)

+966 555 109 592 (Sales)

JEDDAH

DHABAN

+966 559 097 711 (Sales)

+966 559 091 177 (Admin)



المملكة العربية السعودية

الرياض - الخرج

طرق الحرص

+٩٦٦ ١١ ٥٤٢ ١٢٢٢ (إدارة)

+٩٦٦ ٥٥٥ ١٠٩ ٥٩٢ (مبيعات)

جدة

دهبان

+٩٦٦ ٥٥٩ ٠٩٧ ٧١١ (مبيعات)

+٩٦٦ ٥٥٩ ٠٩١ ١٧٧ (إدارة)

www.rtmix.co
info@rtmix.co